



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECint®\_rate2006 = 688

PRIMERGY RX2540 M1, Intel Xeon E5-2643 v3, 3.4 GHz

SPECint\_rate\_base2006 = 667

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2013

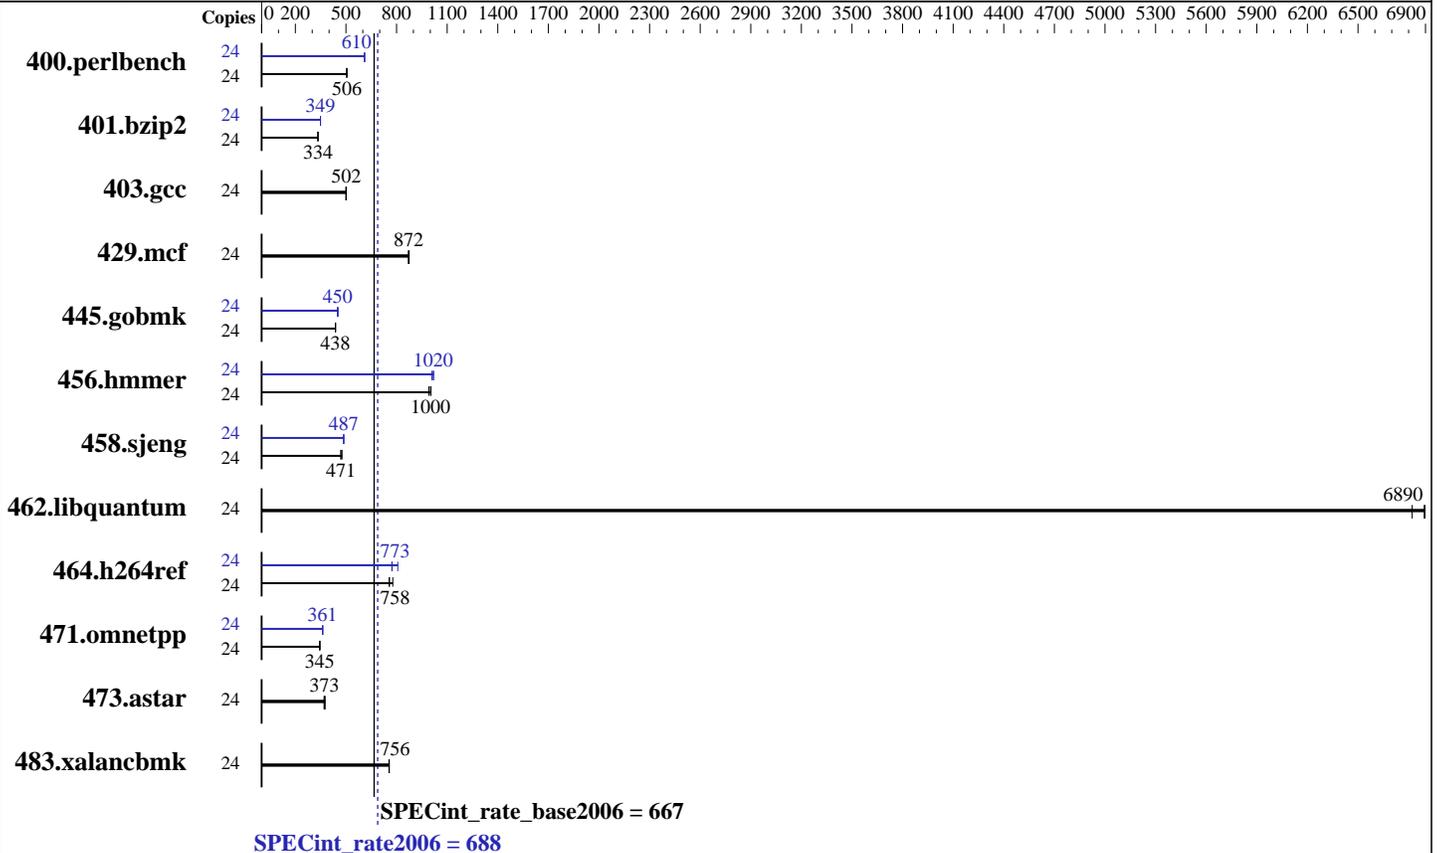

### Hardware

CPU Name: Intel Xeon E5-2643 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.23.3.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 688

PRIMERGY RX2540 M1, Intel Xeon E5-2643 v3, 3.4 GHz

SPECint\_rate\_base2006 = 667

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Dec-2014  
Hardware Availability: Sep-2014  
Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	466	503	<b>464</b>	<b>506</b>	463	506	24	385	610	<b>384</b>	<b>610</b>	384	611
401.bzip2	24	693	334	694	334	<b>693</b>	<b>334</b>	24	664	349	<b>664</b>	<b>349</b>	663	349
403.gcc	24	<b>385</b>	<b>502</b>	385	502	387	500	24	<b>385</b>	<b>502</b>	385	502	387	500
429.mcf	24	<b>251</b>	<b>872</b>	252	870	250	875	24	<b>251</b>	<b>872</b>	252	870	250	875
445.gobmk	24	<b>575</b>	<b>438</b>	576	437	574	439	24	555	453	<b>559</b>	<b>450</b>	560	450
456.hammer	24	226	992	<b>224</b>	<b>1000</b>	223	1000	24	220	1020	222	1010	<b>220</b>	<b>1020</b>
458.sjeng	24	618	470	<b>617</b>	<b>471</b>	609	477	24	596	487	<b>596</b>	<b>487</b>	597	486
462.libquantum	24	72.1	6900	<b>72.2</b>	<b>6890</b>	72.9	6820	24	72.1	6900	<b>72.2</b>	<b>6890</b>	72.9	6820
464.h264ref	24	<b>701</b>	<b>758</b>	683	778	702	756	24	687	773	<b>687</b>	<b>773</b>	658	807
471.omnetpp	24	433	346	<b>435</b>	<b>345</b>	437	343	24	<b>415</b>	<b>361</b>	413	363	415	361
473.astar	24	455	370	<b>452</b>	<b>373</b>	447	377	24	455	370	<b>452</b>	<b>373</b>	447	377
483.xalancbmk	24	<b>219</b>	<b>756</b>	219	757	219	755	24	<b>219</b>	<b>756</b>	219	757	219	755

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance  
QPI snoop mode: Early Snoop  
COD Enable = Disabled, Early Snoop = Enabled  
CPU C1E Support = Disabled

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 688**

PRIMERGY RX2540 M1, Intel Xeon E5-2643 v3, 3.4 GHz

**SPECint\_rate\_base2006 = 667**

**CPU2006 license:** 19

**Test date:** Dec-2014

**Test sponsor:** Fujitsu

**Hardware Availability:** Sep-2014

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 688**

PRIMERGY RX2540 M1, Intel Xeon E5-2643 v3, 3.4 GHz

**SPECint\_rate\_base2006 = 667**

**CPU2006 license:** 19

**Test date:** Dec-2014

**Test sponsor:** Fujitsu

**Hardware Availability:** Sep-2014

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 688**

PRIMERGY RX2540 M1, Intel Xeon E5-2643 v3, 3.4 GHz

**SPECint\_rate\_base2006 = 667**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Dec-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 14 10:26:40 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 January 2015.