



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®\_rate2006 = 585

Express5800/R120f-2E (Intel Xeon E5-2630 v3)

SPECfp\_rate\_base2006 = 570

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jan-2015

Hardware Availability: Jan-2015

Software Availability: Jul-2014

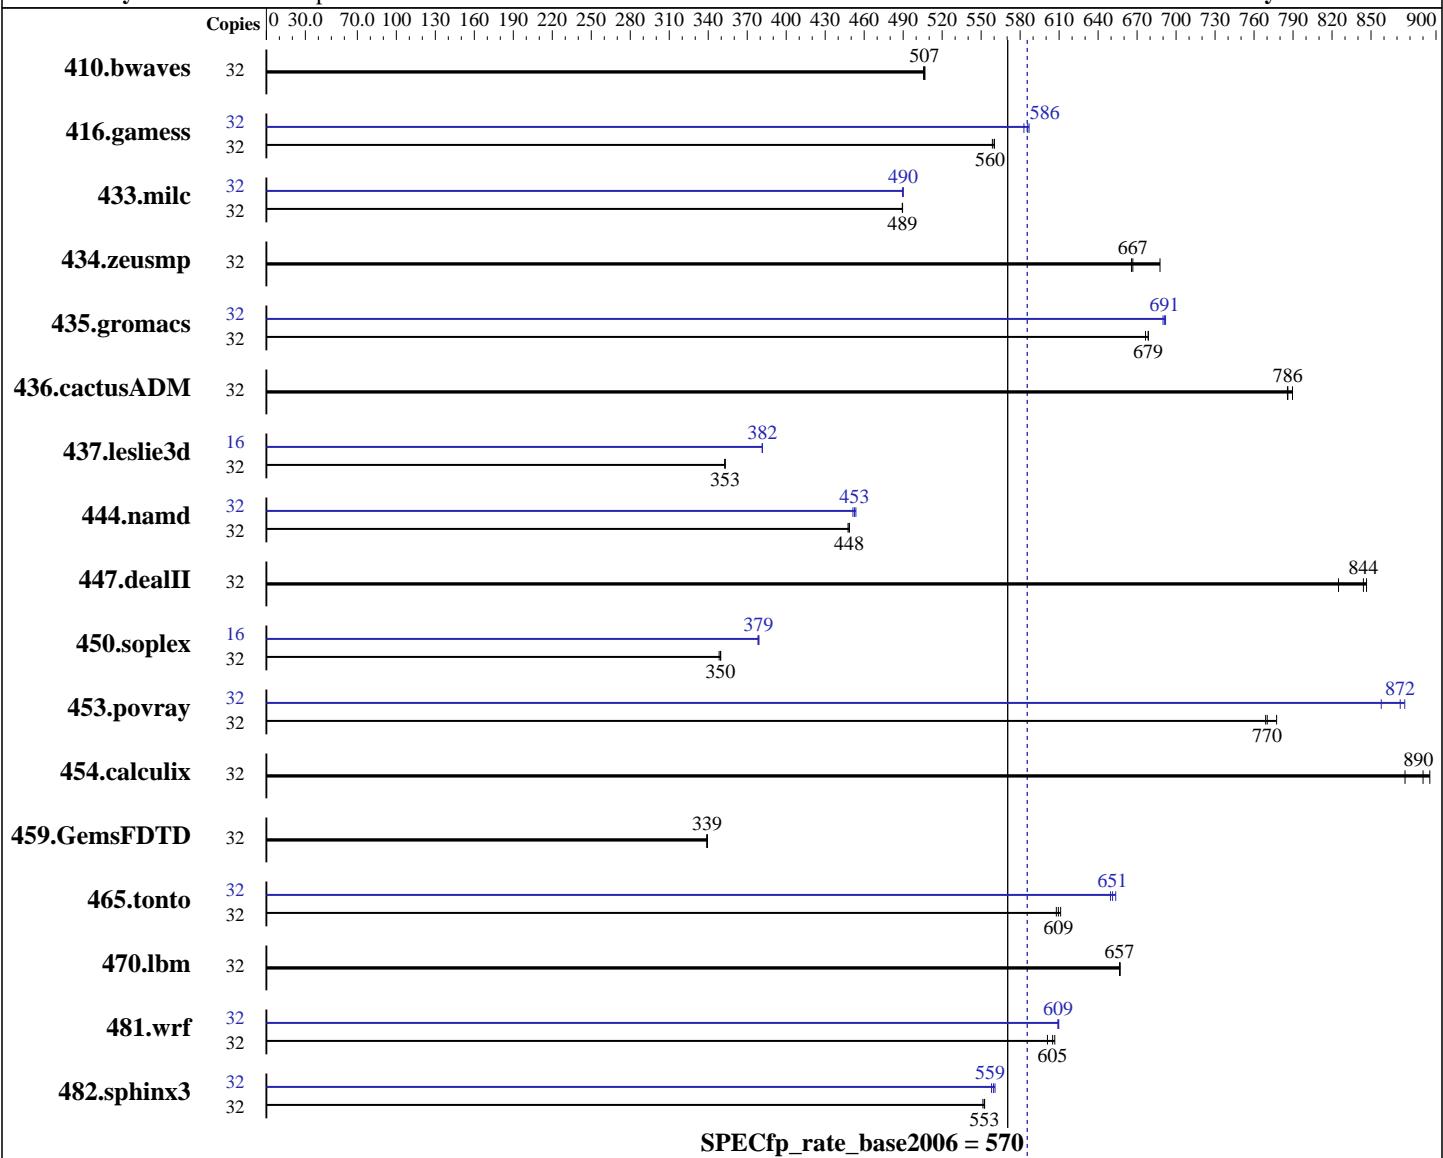

SPECfp\_rate\_base2006 = 570

SPECfp\_rate2006 = 585

## Hardware

CPU Name: Intel Xeon E5-2630 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
CPU MHz: 2400  
FPU: Integrated  
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
Compiler: Kernel 2.6.32-431.20.3.el6.x86\_64  
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120f-2E (Intel Xeon E5-2630 v3)

**SPECfp\_rate2006 = 585**

**CPU2006 license:** 9006

**Test date:** Jan-2015

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jan-2015

**Tested by:** NEC Corporation

**Software Availability:** Jul-2014

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<b>859</b>	<b>507</b>	858	507	860	506	32	<b>859</b>	<b>507</b>	858	507	860	506
416.gamess	32	1118	560	<b>1119</b>	<b>560</b>	1122	559	32	1068	587	<b>1070</b>	<b>586</b>	1075	583
433.milc	32	600	489	<b>600</b>	<b>489</b>	600	490	32	600	490	<b>600</b>	<b>490</b>	600	489
434.zeusmp	32	423	688	<b>437</b>	<b>667</b>	437	666	32	423	688	<b>437</b>	<b>667</b>	437	666
435.gromacs	32	337	679	338	676	<b>337</b>	<b>679</b>	32	331	690	<b>331</b>	<b>691</b>	330	692
436.cactusADM	32	487	786	484	790	<b>486</b>	<b>786</b>	32	487	786	484	790	<b>486</b>	<b>786</b>
437.leslie3d	32	<b>852</b>	<b>353</b>	852	353	853	353	16	394	382	394	382	<b>394</b>	<b>382</b>
444.namd	32	572	449	<b>572</b>	<b>448</b>	573	448	32	566	454	569	451	<b>567</b>	<b>453</b>
447.dealII	32	444	825	432	847	<b>434</b>	<b>844</b>	32	444	825	432	847	<b>434</b>	<b>844</b>
450.soplex	32	763	350	<b>764</b>	<b>350</b>	766	348	16	352	379	353	378	<b>352</b>	<b>379</b>
453.povray	32	219	777	<b>221</b>	<b>770</b>	221	769	32	198	858	<b>195</b>	<b>872</b>	194	876
454.calculix	32	<b>297</b>	<b>890</b>	301	876	295	895	32	<b>297</b>	<b>890</b>	301	876	295	895
459.GemsFDTD	32	1002	339	1000	339	<b>1001</b>	<b>339</b>	32	1002	339	1000	339	<b>1001</b>	<b>339</b>
465.tonto	32	<b>517</b>	<b>609</b>	518	608	515	611	32	<b>484</b>	<b>651</b>	482	654	<b>485</b>	650
470.lbm	32	669	657	670	657	<b>670</b>	<b>657</b>	32	669	657	670	657	<b>670</b>	<b>657</b>
481.wrf	32	<b>591</b>	<b>605</b>	589	607	595	601	32	<b>587</b>	<b>609</b>	586	610	587	609
482.sphinx3	32	<b>1129</b>	<b>553</b>	1128	553	1131	551	32	1112	561	1118	558	<b>1115</b>	<b>559</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Management Policy: Custom

Energy Performance: Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120f-2E (Intel Xeon E5-2630 v3)

**SPECfp\_rate2006 = 585**

**CPU2006 license:** 9006

**Test date:** Jan-2015

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jan-2015

**Tested by:** NEC Corporation

**Software Availability:** Jul-2014

## Platform Notes (Continued)

Patrol Scrub: Disabled

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
    434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
    444.namd: -DSPEC\_CPU\_LP64  
    447.dealII: -DSPEC\_CPU\_LP64  
    450.soplex: -DSPEC\_CPU\_LP64  
    453.povray: -DSPEC\_CPU\_LP64  
    454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
    465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
    481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120f-2E (Intel Xeon E5-2630 v3)

**SPECfp\_rate2006 = 585**

CPU2006 license: 9006

Test date: Jan-2015

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-2E (Intel Xeon E5-2630 v3)

**SPECfp\_rate2006 = 585**

**SPECfp\_rate\_base2006 = 570**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jan-2015

**Hardware Availability:** Jan-2015

**Software Availability:** Jul-2014

## Peak Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbmb: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
          -O3(pass 2) -no-prec-div(pass 2)  
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
          -auto-ilp32
```

470.lbmb: basepeak = yes

```
482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
             -unroll2
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
          -O3(pass 2) -no-prec-div(pass 2)  
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
          -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
             -O3(pass 2) -no-prec-div(pass 2)  
             -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
             -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
             -O3(pass 2) -no-prec-div(pass 2)  
             -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
             -ansi-alias
```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-2E (Intel Xeon E5-2630 v3)

**SPECfp\_rate2006 = 585**

**CPU2006 license:** 9006

**Test date:** Jan-2015

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jan-2015

**Tested by:** NEC Corporation

**Software Availability:** Jul-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Oct 2 18:37:37 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 February 2015.