



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>2006 = 114

Huawei XH622 V3 (Intel Xeon E5-2643 v3)

SPECfp\_base2006 = 110

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

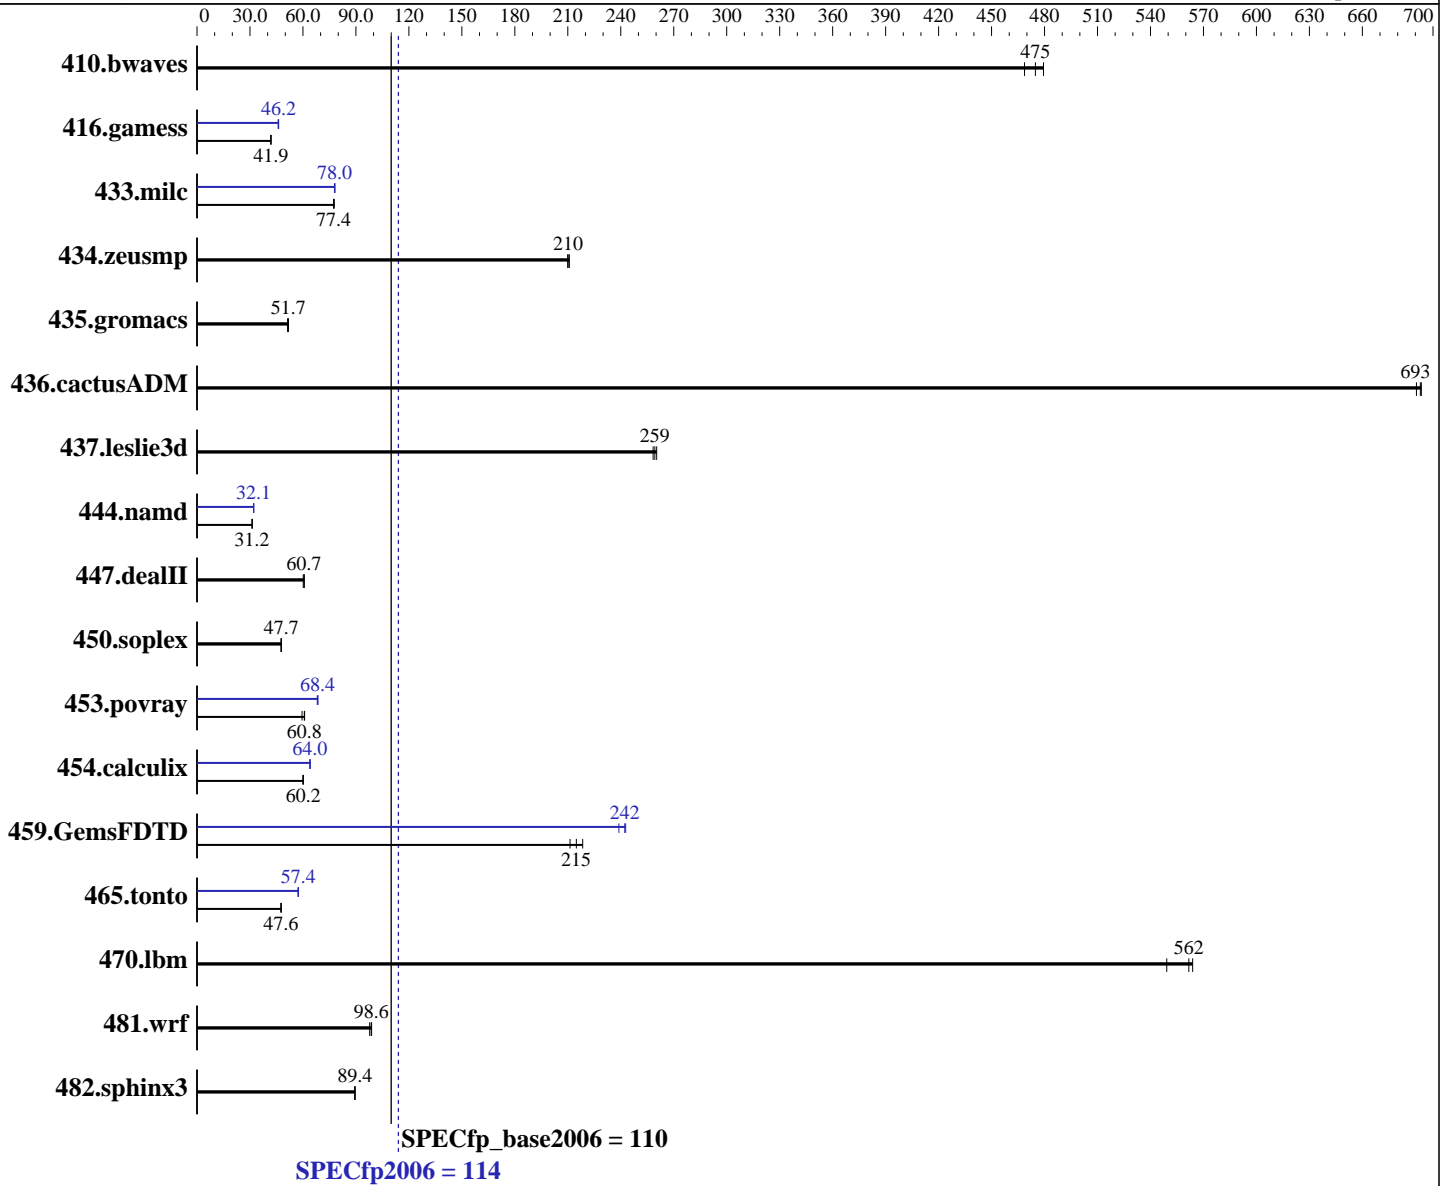

### Hardware

CPU Name: Intel Xeon E5-2643 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **114**

Huawei XH622 V3 (Intel Xeon E5-2643 v3)

SPECfp\_base2006 = **110**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	28.3	479	29.0	469	<b><u>28.6</u></b>	<b><u>475</u></b>	28.3	479	29.0	469	<b><u>28.6</u></b>	<b><u>475</u></b>
416.gamess	<b><u>467</u></b>	<b><u>41.9</u></b>	467	41.9	469	41.7	424	46.2	426	45.9	<b><u>424</u></b>	<b><u>46.2</u></b>
433.milc	119	77.3	<b><u>119</u></b>	<b><u>77.4</u></b>	118	77.7	118	77.8	118	78.1	<b><u>118</u></b>	<b><u>78.0</u></b>
434.zeusmp	<b><u>43.3</u></b>	<b><u>210</u></b>	43.3	210	43.2	211	<b><u>43.3</u></b>	<b><u>210</u></b>	43.3	210	43.2	211
435.gromacs	<b><u>138</u></b>	<b><u>51.7</u></b>	139	51.3	138	51.8	<b><u>138</u></b>	<b><u>51.7</u></b>	139	51.3	138	51.8
436.cactusADM	<b><u>17.2</u></b>	<b><u>693</u></b>	17.2	693	17.3	691	<b><u>17.2</u></b>	<b><u>693</u></b>	17.2	693	17.3	691
437.leslie3d	<b><u>36.3</u></b>	<b><u>259</u></b>	36.1	260	36.4	258	<b><u>36.3</u></b>	<b><u>259</u></b>	36.1	260	36.4	258
444.namd	257	31.2	<b><u>257</u></b>	<b><u>31.2</u></b>	257	31.2	250	32.1	<b><u>250</u></b>	<b><u>32.1</u></b>	250	32.1
447.dealII	190	60.2	<b><u>188</u></b>	<b><u>60.7</u></b>	188	60.7	190	60.2	<b><u>188</u></b>	<b><u>60.7</u></b>	188	60.7
450.soplex	175	47.6	174	47.9	<b><u>175</u></b>	<b><u>47.7</u></b>	175	47.6	174	47.9	<b><u>175</u></b>	<b><u>47.7</u></b>
453.povray	87.3	60.9	89.4	59.5	<b><u>87.5</u></b>	<b><u>60.8</u></b>	77.7	68.5	<b><u>77.8</u></b>	<b><u>68.4</u></b>	78.1	68.1
454.calculix	138	60.0	137	60.2	<b><u>137</u></b>	<b><u>60.2</u></b>	129	64.1	<b><u>129</u></b>	<b><u>64.0</u></b>	129	63.9
459.GemsFDTD	<b><u>49.4</u></b>	<b><u>215</u></b>	48.6	218	50.2	211	44.4	239	43.7	243	<b><u>43.8</u></b>	<b><u>242</u></b>
465.tonto	207	47.5	206	47.7	<b><u>207</u></b>	<b><u>47.6</u></b>	171	57.5	172	57.2	<b><u>172</u></b>	<b><u>57.4</u></b>
470.lbm	24.4	564	25.0	549	<b><u>24.5</u></b>	<b><u>562</u></b>	24.4	564	25.0	549	<b><u>24.5</u></b>	<b><u>562</u></b>
481.wrf	114	97.8	<b><u>113</u></b>	<b><u>98.6</u></b>	113	98.9	114	97.8	<b><u>113</u></b>	<b><u>98.6</u></b>	113	98.9
482.sphinx3	<b><u>218</u></b>	<b><u>89.4</u></b>	218	89.6	218	89.4	<b><u>218</u></b>	<b><u>89.4</u></b>	218	89.6	218	89.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Custom  
 Set Snoop Mode to HS mode  
 Set HT to Disable  
 Sysinfo program /spec/config/sysinfo.rev6914  
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
 running on localhost.localdomain Sun Feb 15 14:53:49 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 114

Huawei XH622 V3 (Intel Xeon E5-2643 v3)

SPECfp\_base2006 = 110

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2643 v3 @ 3.40GHz

2 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 6

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

cache size : 20480 KB

From /proc/meminfo

MemTotal: 263579840 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.0 (Maipo)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="7.0"

PRETTY\_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"

ANSI\_COLOR="0;31"

CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.0:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.0:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-123.el7.x86\_64 #1 SMP Mon May 5 11:16:57

EDT 2014 x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Feb 15 14:52

SPEC is set to: /spec

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda2 xfs 445G 207G 238G 47% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 1.23 11/19/2014

Memory:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 114

Huawei XH622 V3 (Intel Xeon E5-2643 v3)

SPECfp\_base2006 = 110

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Platform Notes (Continued)

4x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz  
4x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz  
4x Samsung M393A2G40DB0-CPB 16 GB 1 rank 2133 MHz  
4x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
OMP_NUM_THREADS = "12"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

The Huawei XH622 V3 and Huawei XH628 V3

are electronically equivalent.

The results have been measured on a Huawei XH628 V3 model.

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 114

Huawei XH622 V3 (Intel Xeon E5-2643 v3)

SPECfp\_base2006 = 110

CPU2006 license: 3175

Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 114

Huawei XH622 V3 (Intel Xeon E5-2643 v3)

SPECfp\_base2006 = 110

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 114

Huawei XH622 V3 (Intel Xeon E5-2643 v3)

SPECfp\_base2006 = 110

CPU2006 license: 3175

Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 10 16:01:49 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 March 2015.