



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)

**SPECint\_rate2006 = 731**

**SPECint\_rate\_base2006 = 703**

CPU2006 license: 9008


Test date: Feb-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

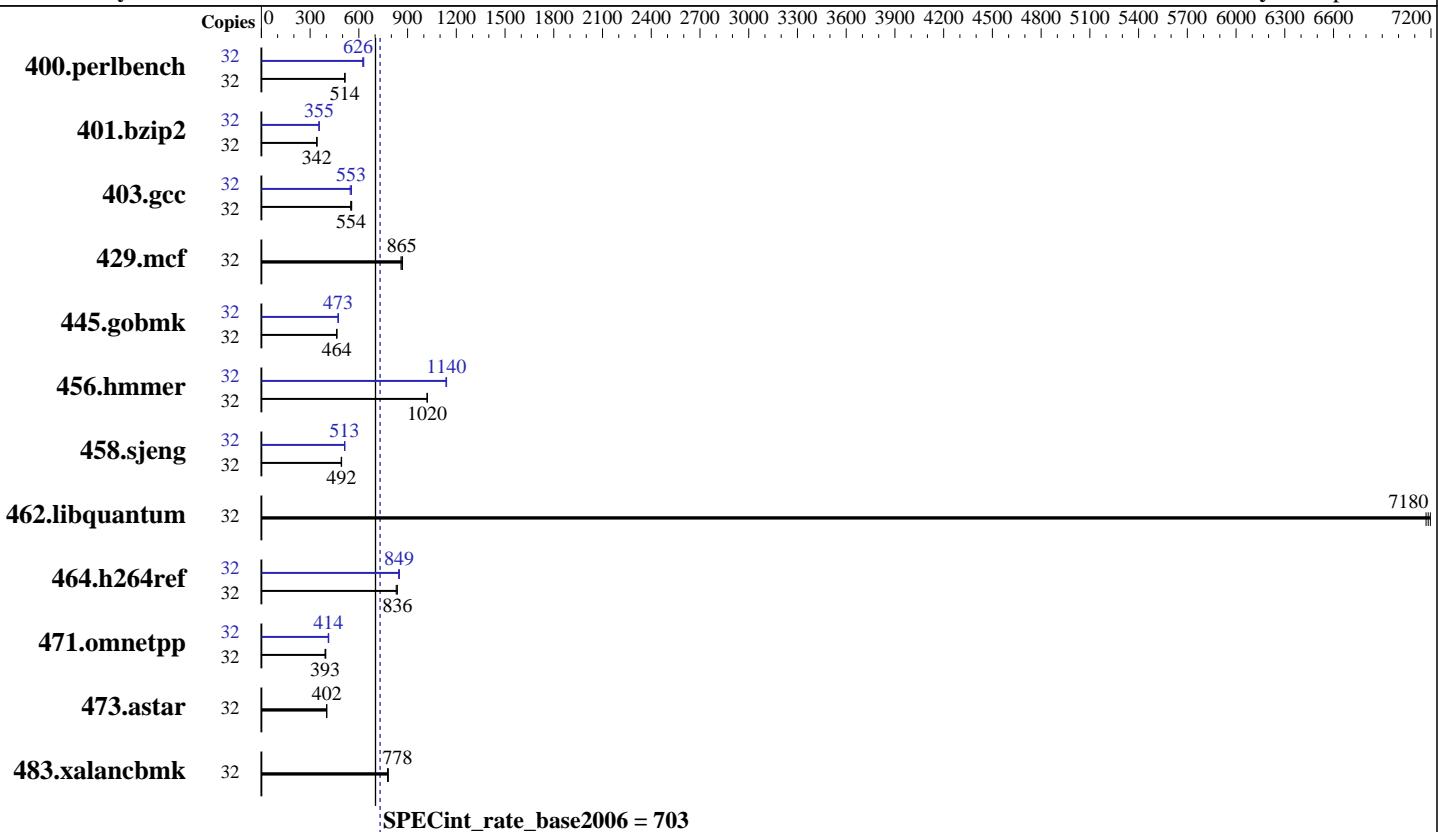

### Hardware

CPU Name:	Intel Xeon E5-2640 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem:	1 x 240 GB SATA II SSD
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.20.1.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

<b>ACTION S.A.</b>	<b>SPECint_rate2006 =</b>	<b>731</b>
ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)	<b>SPECint_rate_base2006 =</b>	<b>703</b>

CPU2006 license: 9008

Test date: Feb-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b>608</b>	<b>514</b>	608	514	609	514	32	<b>499</b>	<b>626</b>	496	630	501	624
401.bzip2	32	903	342	<b>904</b>	<b>342</b>	905	341	32	870	355	<b>869</b>	<b>355</b>	869	355
403.gcc	32	463	556	<b>465</b>	<b>554</b>	469	550	32	471	547	464	555	<b>466</b>	<b>553</b>
429.mcf	32	336	869	<b>337</b>	<b>865</b>	340	859	32	336	869	<b>337</b>	<b>865</b>	340	859
445.gobmk	32	<b>723</b>	<b>464</b>	723	464	723	464	32	<b>710</b>	<b>473</b>	710	472	709	473
456.hmmer	32	293	1020	292	1020	<b>293</b>	<b>1020</b>	32	<b>262</b>	<b>1140</b>	263	1140	262	1140
458.sjeng	32	<b>786</b>	<b>492</b>	784	494	787	492	32	756	512	754	514	<b>756</b>	<b>513</b>
462.libquantum	32	<b>92.3</b>	<b>7180</b>	92.1	7200	92.5	7170	32	<b>92.3</b>	<b>7180</b>	92.1	7200	92.5	7170
464.h264ref	32	847	836	<b>847</b>	<b>836</b>	853	830	32	<b>834</b>	<b>849</b>	834	849	838	845
471.omnetpp	32	504	397	509	393	<b>509</b>	<b>393</b>	32	486	411	483	414	<b>484</b>	<b>414</b>
473.astar	32	<b>559</b>	<b>402</b>	560	401	558	402	32	<b>559</b>	<b>402</b>	560	401	558	402
483.xalancbmk	32	283	781	<b>284</b>	<b>778</b>	284	778	32	283	781	<b>284</b>	<b>778</b>	284	778

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### Bios Settings

Power Technology = Energy Efficient  
Enforce POR = Disabled

### BMC Setting

Fan Mode = Full Speed

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Wed Feb 18 02:08:51 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)

**SPECint\_rate2006 = 731**

**SPECint\_rate\_base2006 = 703**

**CPU2006 license:** 9008

**Test date:** Feb-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

## Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E5-2640 v3 @ 2.60GHz
  2 "physical id"s (chips)
    32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings   : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      263871312 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 7.0 (Maipo)

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.0 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.0"
  PRETTY_NAME="Red Hat Enterprise Linux"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
  Linux localhost.localdomain 3.10.0-123.20.1.el7.x86_64 #3 SMP Wed Feb 4
  14:55:18 CET 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 17 08:31

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  212G   25G  176G  13%  /
```

Additional information from dmidecode:

BIOS American Megatrends Inc. 1.0a 11/05/2014

Memory:

16x 16 GB

2x Samsung(data:14/40) M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank

14x Samsung(data:14/48) M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank

(End of data from sysinfo program)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>731</b>
ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)	<b>SPECint_rate_base2006 =</b>	<b>703</b>
CPU2006 license: 9008	Test date:	Feb-2015
Test sponsor: ACTION S.A.	Hardware Availability:	Sep-2014
Tested by: ACTION S.A.	Software Availability:	Sep-2014

## Platform Notes (Continued)

dmidecode does not properly detect memory modules  
16 modules of 16 GB were used to run the test (256 GB total)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2/lib/32:/cpu2006.1.2/lib/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory  
using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

<b>ACTION S.A.</b> ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)	<b>SPECint_rate2006 =</b> 731 <b>SPECint_rate_base2006 =</b> 703
<b>CPU2006 license:</b> 9008	<b>Test date:</b> Feb-2015
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b> Sep-2014
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b> Sep-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>731</b>
ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)	<b>SPECint_rate_base2006 =</b>	<b>703</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Feb-2015
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	Sep-2014
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Sep-2014

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hummer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)

**SPECint\_rate2006 = 731**

**SPECint\_rate\_base2006 = 703**

**CPU2006 license:** 9008

**Test date:** Feb-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 10 16:03:29 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 March 2015.