



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint®2006 = 62.6

R5300 G3 (Intel Xeon E5-2660 v3)

SPECint_base2006 = 59.1

CPU2006 license: 3834


Test sponsor: ZTE

Tested by: ZTE

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

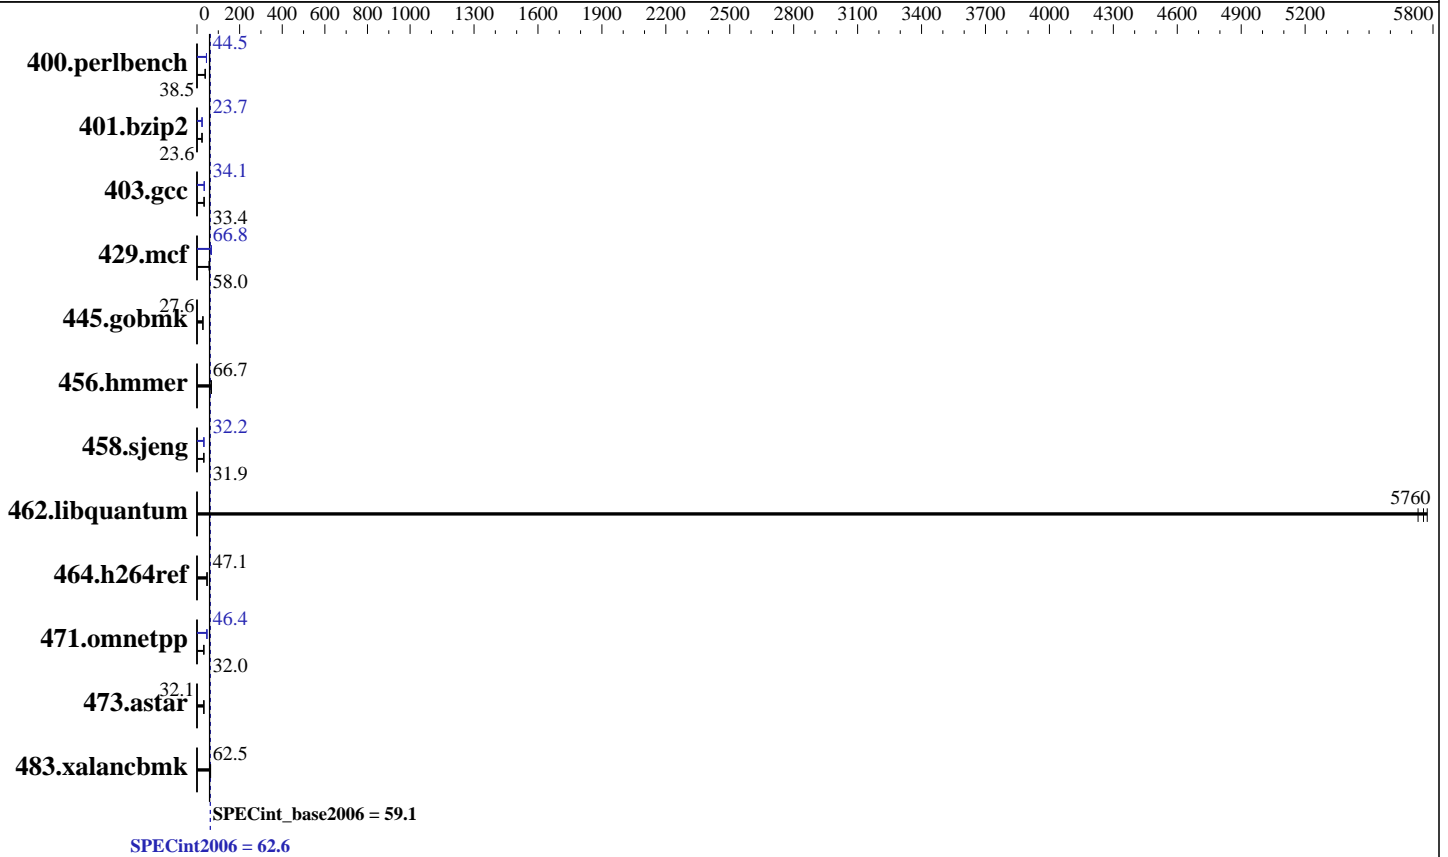

Hardware

CPU Name: Intel Xeon E5-2660 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 2*600 GB SAS, 10000RPM, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.0(Maipo) 3.10.0-121.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint2006 = **62.6**

R5300 G3 (Intel Xeon E5-2660 v3)

SPECint_base2006 = **59.1**

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	255	38.4	253	38.7	<u>253</u>	<u>38.5</u>	<u>220</u>	<u>44.5</u>	220	44.5	220	44.5
401.bzip2	411	23.5	<u>409</u>	<u>23.6</u>	409	23.6	<u>406</u>	<u>23.7</u>	407	23.7	406	23.8
403.gcc	<u>241</u>	<u>33.4</u>	240	33.5	242	33.3	<u>236</u>	<u>34.1</u>	236	34.1	237	34.0
429.mcf	<u>157</u>	<u>58.0</u>	157	58.2	161	56.8	136	66.9	137	66.8	<u>136</u>	<u>66.8</u>
445.gobmk	380	27.6	380	27.6	<u>380</u>	<u>27.6</u>	380	27.6	380	27.6	<u>380</u>	<u>27.6</u>
456.hammer	140	66.7	<u>140</u>	<u>66.7</u>	140	66.5	140	66.7	<u>140</u>	<u>66.7</u>	140	66.5
458.sjeng	<u>379</u>	<u>31.9</u>	378	32.0	379	31.9	<u>375</u>	<u>32.2</u>	375	32.3	375	32.2
462.libquantum	<u>3.60</u>	<u>5760</u>	3.62	5730	3.59	5770	<u>3.60</u>	<u>5760</u>	3.62	5730	3.59	5770
464.h264ref	468	47.3	472	46.9	<u>469</u>	<u>47.1</u>	468	47.3	472	46.9	<u>469</u>	<u>47.1</u>
471.omnetpp	198	31.6	194	32.3	<u>195</u>	<u>32.0</u>	<u>135</u>	<u>46.4</u>	135	46.4	134	46.5
473.astar	220	31.9	218	32.2	<u>219</u>	<u>32.1</u>	220	31.9	218	32.2	<u>219</u>	<u>32.1</u>
483.xalancbmk	108	63.9	112	61.6	<u>110</u>	<u>62.5</u>	108	63.9	112	61.6	<u>110</u>	<u>62.5</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Some unuseful services disabled^o

abrt-ccpp, abrt-oops, abrt-d, avahi-daemon, bluetooth, cups, fcoe, iscsi, kdump, ksm, ksmtuned, lvm2-monitor, postfix, rpcbind, rpcgsd, sysstat

Platform Notes

BIOS settings:

Turbo boost Technology enabled

Virtualization Technology disabled

Hyper Threading Technology disabled

Sysinfo program /home/speccpu/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ 2b55956e7c0e338e808a36a21505f13a

running on localhost.localdomain Sun Feb 8 06:04:24 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2660 v3 @ 2.60GHz

2 "physical id"s (chips)

20 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint2006 = 62.6

R5300 G3 (Intel Xeon E5-2660 v3)

SPECint_base2006 = 59.1

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 10
siblings  : 10
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

From /proc/meminfo

```
MemTotal:      263619288 kB
HugePages_Total:    2048
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-121.el7.x86_64 #1 SMP Tue Apr 8 10:48:19
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 8 00:42

SPEC is set to: /home/speccpu

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  475G  145G  307G  32% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. UBF04.02.17_SVN0 02/04/2015

Memory:

16x Micron 36ADS2G72PZ-2G1A1 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint2006 = 62.6

R5300 G3 (Intel Xeon E5-2660 v3)

SPECint_base2006 = 59.1

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/speccpu/libs/32:/home/speccpu/libs/64:/home/speccpu/sh"

OMP_NUM_THREADS = "20"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint2006 = 62.6

R5300 G3 (Intel Xeon E5-2660 v3)

SPECint_base2006 = 59.1

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

429.mcf: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32 -L/opt/intel-new/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -DSPEC_CPU_LP64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint2006 = 62.6

R5300 G3 (Intel Xeon E5-2660 v3)

SPECint_base2006 = 59.1

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ZTE-Platform-Flags-V2.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ZTE-Platform-Flags-V2.0.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint2006 = 62.6

R5300 G3 (Intel Xeon E5-2660 v3)

SPECint_base2006 = 59.1

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 24 17:17:49 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 March 2015.