SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECint®_rate2006 = 786

SPECint_rate_base2006 = 754

CPU2006 license: 55		**Test date:**	Mar-2015
Test sponsor:	Dell Inc.	**Hardware Availability:**	Apr-2015
Tested by:	Dell Inc.	**Software Availability:**	Apr-2015

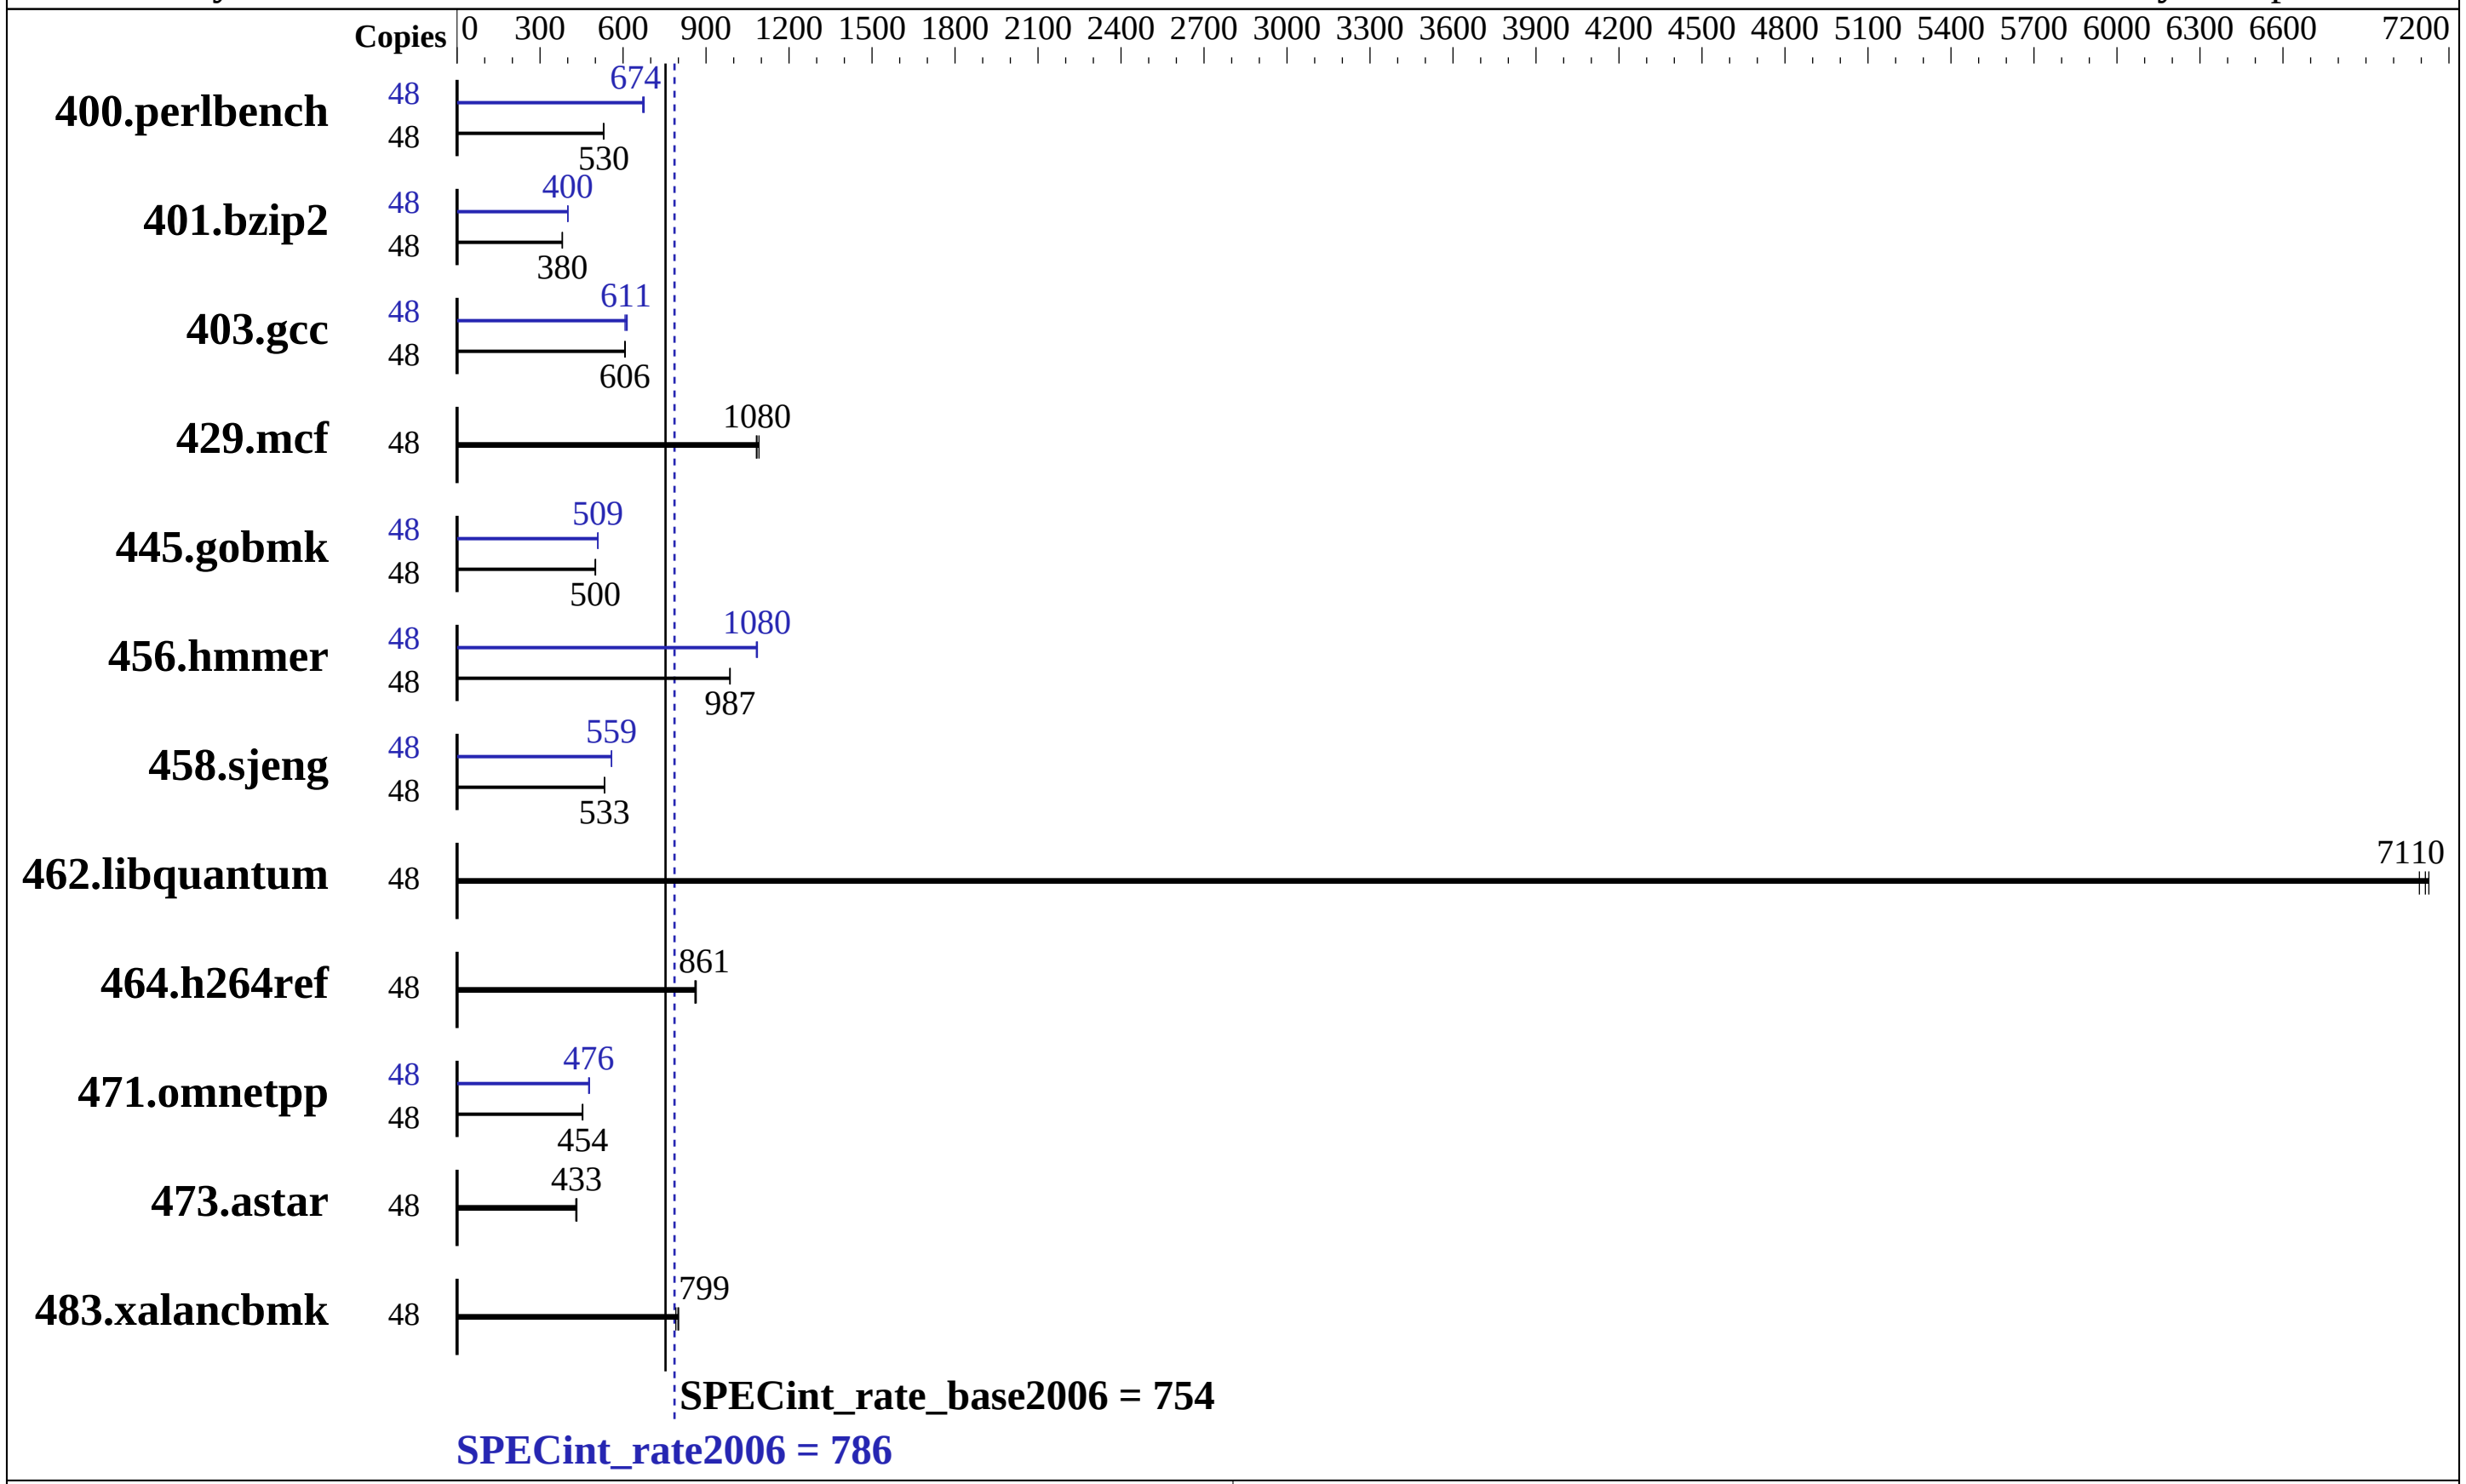

Hardware

CPU Name:	Intel Xeon E5-2650L v3
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 120 GB SSD SATA
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 3.12.28-4-default
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

Dell Inc.

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECint_rate2006 = 786

SPECint_rate_base2006 = 754

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.
Test date: Mar-2015
Hardware Availability: Apr-2015
Software Availability: Apr-2015

Results Table

Benchmark	Base Copies	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Peak Copies	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio
400.perlbench	48	887	529	884	531	**885**	**530**	48	**696**	**674**	699	671	693	676
401.bzip2	48	**1218**	**380**	1218	380	1216	381	48	1156	401	**1157**	**400**	1158	400
403.gcc	48	**637**	**606**	637	606	635	608	48	628	615	**632**	**611**	636	607
429.mcf	48	**404**	**1080**	401	1090	405	1080	48	**404**	**1080**	401	1090	405	1080
445.gobmk	48	1005	501	**1007**	**500**	1008	500	48	988	509	**989**	**509**	990	509
456.hmmer	48	454	987	**454**	**987**	454	986	48	**413**	**1080**	414	1080	413	1090
458.sjeng	48	1089	533	**1090**	**533**	1090	533	48	**1040**	**559**	1040	558	1039	559
462.libquantum	48	140	7130	140	7090	**140**	**7110**	48	140	7130	140	7090	**140**	**7110**
464.h264ref	48	1229	865	1235	860	**1234**	**861**	48	1229	865	1235	860	**1234**	**861**
471.omnetpp	48	660	454	662	453	**660**	**454**	48	630	476	**630**	**476**	627	479
473.astar	48	785	429	**779**	**433**	778	433	48	785	429	**779**	**433**	778	433
483.xalancbmk	48	413	801	**415**	**799**	419	791	48	413	801	**415**	**799**	419	791

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-kc7s Thu Mar 26 18:03:39 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2650L v3 @ 1.80GHz
      2 "physical id"s (chips)
      48 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

Platform Notes (Continued)

```
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 6
         siblings  : 12
         physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
         physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
      cache size : 15360 KB

   From /proc/meminfo
      MemTotal:       132051252 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      SUSE Linux Enterprise Server 12

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 12 (x86_64)
         VERSION = 12
         PATCHLEVEL = 0
         # This file is deprecated and will be removed in a future service pack or
         release.
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12"
         VERSION_ID="12"
         PRETTY_NAME="SUSE Linux Enterprise Server 12"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12"

   uname -a:
      Linux linux-kc7s 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
      (9879bd4) x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Mar 26 18:02 last=5

   SPEC is set to: /root/cpu2006-1.2
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      ext4  108G  8.5G   99G   8% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS Dell Inc. 1.0.5 03/10/2015
     Memory:
      4x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz
```

Continued on next page

Platform Notes (Continued)

```
    2x 00AD063200AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz
    2x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks:

`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Dell Inc.

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECint_rate2006 = 786

SPECint_rate_base2006 = 754

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2015
Hardware Availability: Apr-2015
Software Availability: Apr-2015

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 21 18:22:58 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 April 2015.