



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint®\_rate2006 = 1020**

PowerEdge R930 (Intel Xeon E7-4809 v3, 2.00 GHz)

**SPECint\_rate\_base2006 = 976**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

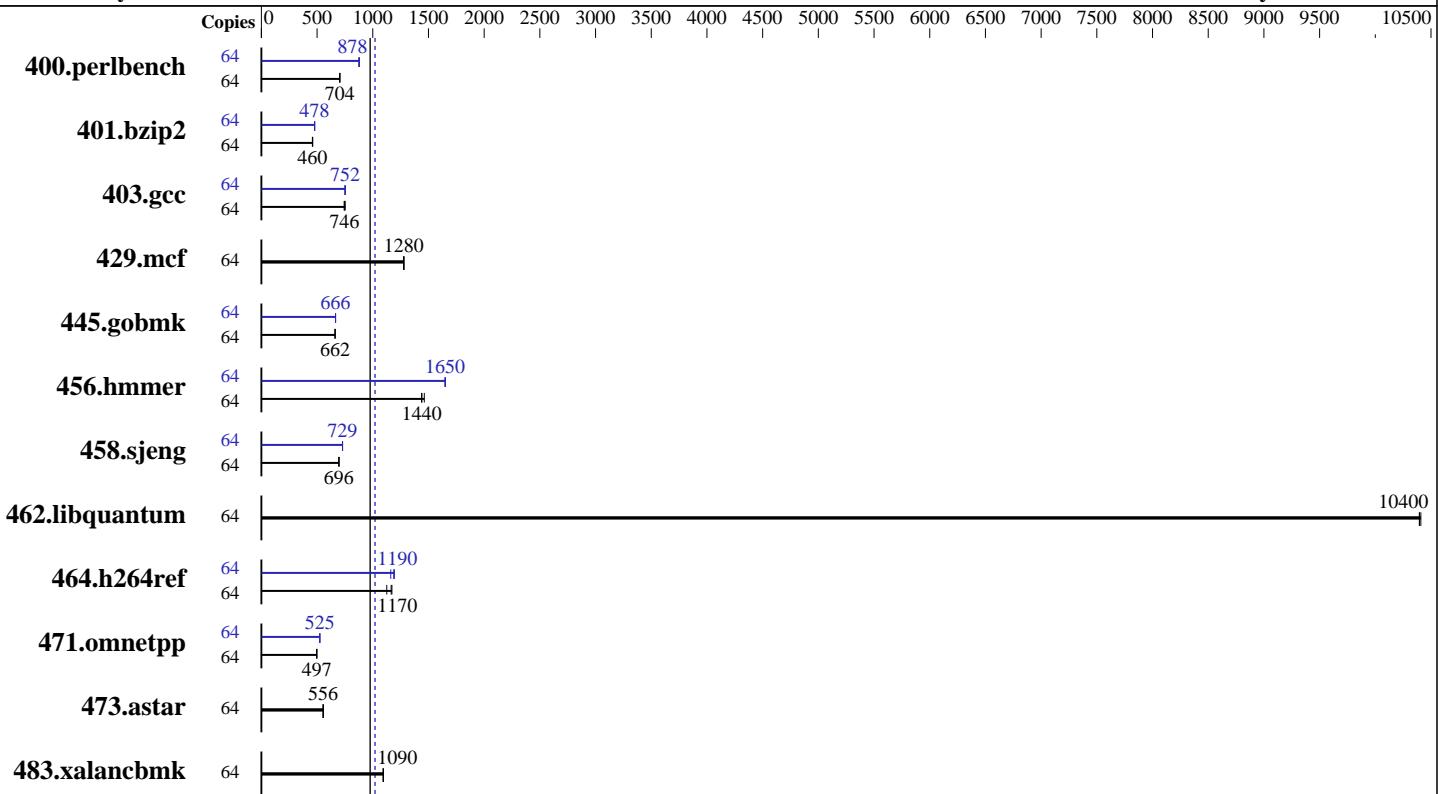

## Hardware

CPU Name:	Intel Xeon E7-4809 v3
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
Disk Subsystem:	1 x 200 GB SAS6 SSD
Other Hardware:	None

## Software

Operating System:	SUSE Linux Enterprise Server 12 3.12.28-4-default
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 1020**

PowerEdge R930 (Intel Xeon E7-4809 v3, 2.00 GHz)

**SPECint\_rate\_base2006 = 976**

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Oct-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	888	704	<b>888</b>	<b>704</b>	889	704	64	<b>713</b>	<b>878</b>	715	874	710	880
401.bzip2	64	1349	458	<b>1342</b>	<b>460</b>	1342	460	64	1291	478	<b>1292</b>	<b>478</b>	1292	478
403.gcc	64	684	753	<b>691</b>	<b>746</b>	693	743	64	<b>685</b>	<b>752</b>	684	753	687	749
429.mcf	64	<b>456</b>	<b>1280</b>	457	1280	456	1280	64	<b>456</b>	<b>1280</b>	457	1280	456	1280
445.gobmk	64	1014	662	<b>1015</b>	<b>662</b>	1015	661	64	1008	666	<b>1008</b>	<b>666</b>	1009	666
456.hammer	64	415	1440	<b>414</b>	<b>1440</b>	408	1460	64	<b>362</b>	<b>1650</b>	361	1650	362	1650
458.sjeng	64	1113	696	<b>1112</b>	<b>696</b>	1111	697	64	1064	728	1062	729	<b>1063</b>	<b>729</b>
462.libquantum	64	<b>128</b>	<b>10400</b>	127	10400	128	10400	64	<b>128</b>	<b>10400</b>	127	10400	128	10400
464.h264ref	64	1258	1130	<b>1216</b>	<b>1170</b>	1209	1170	64	1219	1160	1186	1190	<b>1192</b>	<b>1190</b>
471.omnetpp	64	802	499	<b>806</b>	<b>497</b>	807	495	64	<b>763</b>	<b>525</b>	762	525	763	524
473.astar	64	808	556	<b>808</b>	<b>556</b>	812	553	64	808	556	<b>808</b>	<b>556</b>	812	553
483.xalancbmk	64	403	1100	404	1090	<b>404</b>	<b>1090</b>	64	403	1100	404	1090	<b>404</b>	<b>1090</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost enabled  
Energy Efficient Turbo disabled  
C1E disabled  
C States disabled  
Collaborative CPU Performance Control disabled  
Memory Patrol Scrub disabled  
Memory Refresh Rate set to 1x  
Uncore Frequency set to Maximum  
Energy Efficient Policy set to Performance  
Monitor/MWait enabled

Sysinfo program

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 1020**

PowerEdge R930 (Intel Xeon E7-4809 v3, 2.00 GHz)

**SPECint\_rate\_base2006 = 976**

**CPU2006 license:** 55

**Test date:** Apr-2015

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2015

**Tested by:** Dell Inc.

**Software Availability:** Oct-2014

## Platform Notes (Continued)

```
/root/Desktop/Performance/ic15.0_Aug29_2014/config/sysinfo.rev6914  
$Rev: 6914 $ $Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-6qvx Fri Apr 10 16:56:34 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-4809 v3 @ 2.00GHz  
        4 "physical id"s (chips)  
        64 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
    cpu cores : 8  
    siblings : 16  
    physical 0: cores 0 1 2 3 4 5 6 7  
    physical 1: cores 0 1 2 3 4 5 6 7  
    physical 2: cores 0 1 2 3 4 5 6 7  
    physical 3: cores 0 1 2 3 4 5 6 7  
cache size : 20480 KB
```

```
From /proc/meminfo  
MemTotal:      529204240 kB  
HugePages_Total:      0  
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d  
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*  
SuSE-release:  
    SUSE Linux Enterprise Server 12 (x86_64)  
    VERSION = 12  
    PATCHLEVEL = 0  
    # This file is deprecated and will be removed in a future service pack or release.  
    # Please check /etc/os-release for details about this release.  
os-release:  
    NAME="SLES"  
    VERSION="12"  
    VERSION_ID="12"  
    PRETTY_NAME="SUSE Linux Enterprise Server 12"  
    ID="sles"  
    ANSI_COLOR="0;32"  
    CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:  
Linux linux-6qvx 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014  
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R930 (Intel Xeon E7-4809 v3, 2.00 GHz)

**SPECint\_rate2006 = 1020**

**SPECint\_rate\_base2006 = 976**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

## Platform Notes (Continued)

```
run-level 3 Apr 10 16:56 last=5
```

```
SPEC is set to: /root/Desktop/Performance/icl5.0_Aug29_2014
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  181G  9.5G  171G   6%  /
```

```
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 1.0.1 [MRC_096] 03/27/2015
```

```
Memory:
```

```
 32x 00AD00B300AD Not Specified 16 GB 2 rank 2133 MHz, configured at 1333 MHz
  64x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/Desktop/Performance/icl5.0_Aug29_2014/lib/32:/root/Desktop/Performance/icl5.0_Aug29_2014/lib/64:/root/Desktop/Performance/icl5.0_Aug29_2014/sh"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 1020**

PowerEdge R930 (Intel Xeon E7-4809 v3, 2.00 GHz)

**SPECint\_rate\_base2006 = 976**

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Oct-2014

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R930 (Intel Xeon E7-4809 v3, 2.00 GHz)

**SPECint\_rate2006 = 1020**

**SPECint\_rate\_base2006 = 976**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Apr-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Oct-2014

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R930 (Intel Xeon E7-4809 v3, 2.00 GHz)

**SPECint\_rate2006 = 1020**

**SPECint\_rate\_base2006 = 976**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Apr-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Oct-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 5 15:15:25 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 May 2015.