



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®2006 = 100

PRIMERGY RX2530 M1, Intel Xeon E5-2620 v3, 2.4 GHz

SPECfp_base2006 = 95.2

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

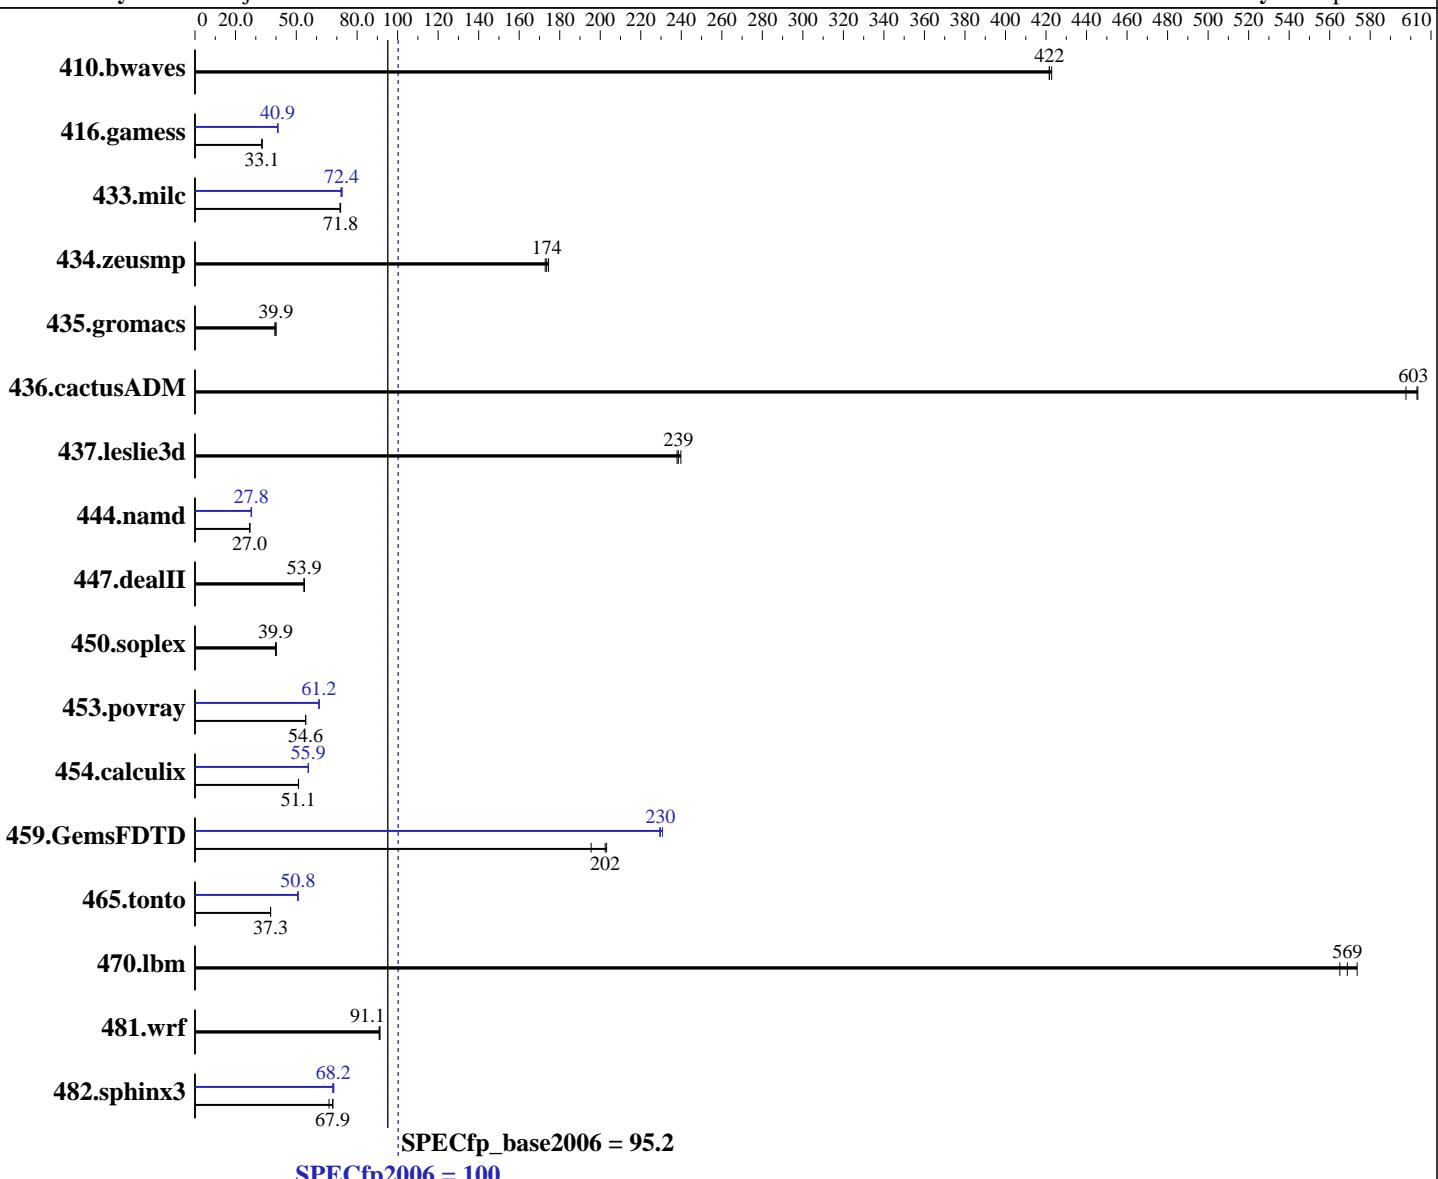

Hardware

CPU Name: Intel Xeon E5-2620 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 Compiler: Kernel 3.10.0-123.8.1.el7.x86_64
 Auto Parallel: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 File System: Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Software: Yes
 xfs

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2620 v3, 2.4 GHz

SPECfp2006 = 100

SPECfp_base2006 = 95.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Seconds | Ratio |
| 410.bwaves | 32.2 | 422 | 32.2 | 422 | 32.1 | 423 | 32.2 | 422 | 32.2 | 422 | 32.1 | 423 |
| 416.gamess | 594 | 33.0 | 591 | 33.1 | 591 | 33.1 | 479 | 40.9 | 480 | 40.8 | 479 | 40.9 |
| 433.milc | 128 | 71.6 | 128 | 71.8 | 128 | 71.8 | 126 | 72.6 | 127 | 72.4 | 127 | 72.0 |
| 434.zeusmp | 52.6 | 173 | 52.4 | 174 | 52.2 | 174 | 52.6 | 173 | 52.4 | 174 | 52.2 | 174 |
| 435.gromacs | 181 | 39.4 | 179 | 40.0 | 179 | 39.9 | 181 | 39.4 | 179 | 40.0 | 179 | 39.9 |
| 436.cactusADM | 20.0 | 598 | 19.8 | 604 | 19.8 | 603 | 20.0 | 598 | 19.8 | 604 | 19.8 | 603 |
| 437.leslie3d | 39.5 | 238 | 39.4 | 239 | 39.2 | 240 | 39.5 | 238 | 39.4 | 239 | 39.2 | 240 |
| 444.namd | 297 | 27.0 | 297 | 27.0 | 297 | 27.0 | 289 | 27.8 | 289 | 27.8 | 289 | 27.8 |
| 447.dealII | 212 | 53.9 | 213 | 53.8 | 212 | 53.9 | 212 | 53.9 | 213 | 53.8 | 212 | 53.9 |
| 450.soplex | 210 | 39.7 | 209 | 39.9 | 208 | 40.1 | 210 | 39.7 | 209 | 39.9 | 208 | 40.1 |
| 453.povray | 97.5 | 54.6 | 97.5 | 54.6 | 97.3 | 54.7 | 86.9 | 61.2 | 86.9 | 61.2 | 86.9 | 61.2 |
| 454.calculix | 162 | 51.1 | 162 | 51.1 | 161 | 51.1 | 148 | 55.9 | 147 | 55.9 | 148 | 55.9 |
| 459.GemsFDTD | 52.2 | 203 | 52.4 | 202 | 54.3 | 196 | 46.2 | 230 | 46.3 | 229 | 46.0 | 231 |
| 465.tonto | 264 | 37.3 | 264 | 37.3 | 264 | 37.3 | 194 | 50.8 | 194 | 50.7 | 193 | 50.9 |
| 470.lbm | 24.2 | 569 | 24.3 | 565 | 24.0 | 574 | 24.2 | 569 | 24.3 | 565 | 24.0 | 574 |
| 481.wrf | 123 | 90.9 | 123 | 91.1 | 122 | 91.3 | 123 | 90.9 | 123 | 91.1 | 122 | 91.3 |
| 482.sphinx3 | 287 | 67.9 | 286 | 68.1 | 295 | 66.2 | 284 | 68.5 | 286 | 68.2 | 287 | 68.0 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Energy Performance = Performance

Utilization Profile = Unbalanced

QPI snoop mode: Home Snoop

COD Enable = Disabled, Early Snoop = Disabled

CPU C1E Support = Disabled



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2620 v3, 2.4 GHz

SPECfp2006 = 100

SPECfp_base2006 = 95.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2620 v3, 2.4 GHz

SPECfp2006 = 100

SPECfp_base2006 = 95.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2620 v3, 2.4 GHz

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

SPECfp2006 =

100

SPECfp_base2006 =

95.2

Test date: Feb-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
             -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: basepeak = yes
```

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -inline-calloc -opt-malloc-options=3 -auto -unroll14
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias
```

```
481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2620 v3, 2.4 GHz

SPECfp2006 = 100

SPECfp_base2006 = 95.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 19 18:14:20 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 May 2015.