



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp<sup>®</sup>2006 = 112

ProLiant DL580 Gen9  
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECfp\_base2006 = 106

CPU2006 license: 3


Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Mar-2015

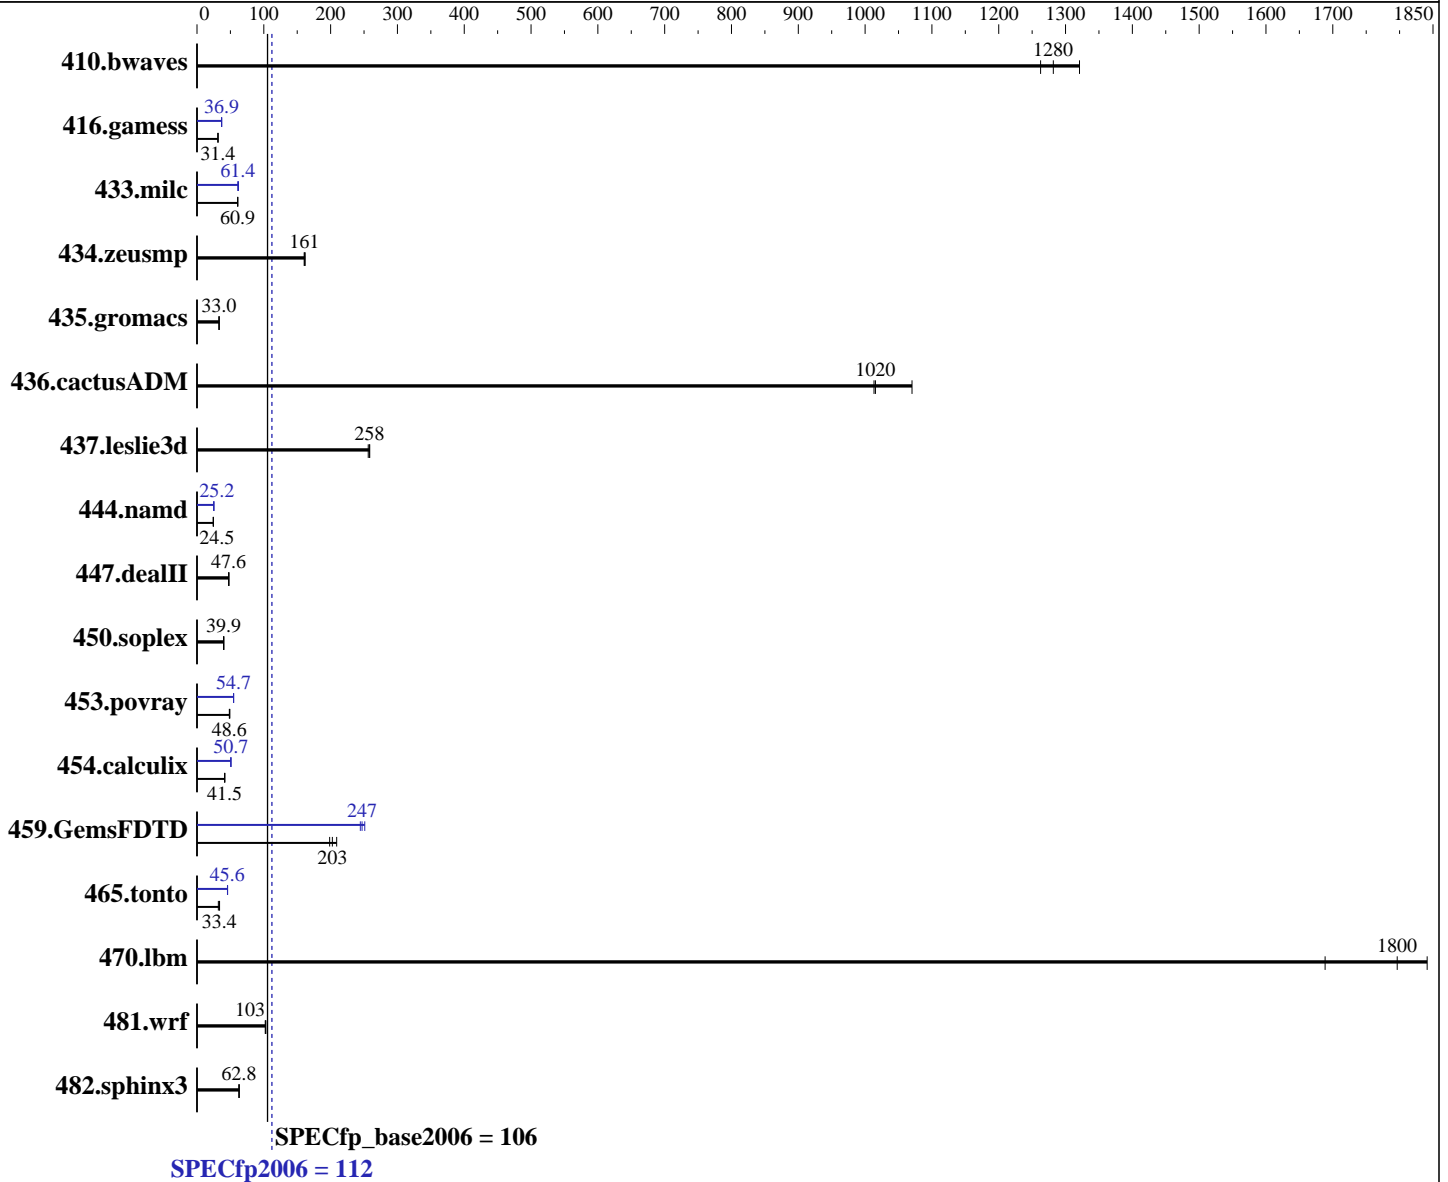

### Hardware

CPU Name: Intel Xeon E7-8870 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = **112**

ProLiant DL580 Gen9  
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECfp\_base2006 = **106**

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Mar-2015

L3 Cache: 45 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>10.6</b>	<b>1280</b>	10.3	1320	10.8	1260	<b>10.6</b>	<b>1280</b>	10.3	1320	10.8	1260
416.gamess	625	31.4	<b>623</b>	<b>31.4</b>	622	31.5	530	36.9	532	36.8	<b>531</b>	<b>36.9</b>
433.milc	151	61.0	<b>151</b>	<b>60.9</b>	151	60.9	<b>150</b>	<b>61.4</b>	150	61.3	148	62.1
434.zeusmp	56.2	162	56.7	160	<b>56.5</b>	<b>161</b>	56.2	162	56.7	160	<b>56.5</b>	<b>161</b>
435.gromacs	214	33.3	<b>217</b>	<b>33.0</b>	217	32.9	214	33.3	<b>217</b>	<b>33.0</b>	217	32.9
436.cactusADM	<b>11.8</b>	<b>1020</b>	11.2	1070	11.8	1010	<b>11.8</b>	<b>1020</b>	11.2	1070	11.8	1010
437.leslie3d	36.4	259	<b>36.4</b>	<b>258</b>	36.7	256	36.4	259	<b>36.4</b>	<b>258</b>	36.7	256
444.namd	328	24.5	<b>328</b>	<b>24.5</b>	328	24.5	319	25.2	<b>319</b>	<b>25.2</b>	318	25.2
447.dealII	241	47.5	<b>241</b>	<b>47.6</b>	240	47.6	241	47.5	<b>241</b>	<b>47.6</b>	240	47.6
450.soplex	210	39.7	207	40.3	<b>209</b>	<b>39.9</b>	210	39.7	207	40.3	<b>209</b>	<b>39.9</b>
453.povray	110	48.4	<b>109</b>	<b>48.6</b>	108	49.2	97.3	54.7	97.0	54.9	<b>97.2</b>	<b>54.7</b>
454.calculix	199	41.4	<b>199</b>	<b>41.5</b>	199	41.6	162	50.8	<b>163</b>	<b>50.7</b>	163	50.7
459.GemsFDTD	53.4	199	<b>52.4</b>	<b>203</b>	50.7	209	<b>42.9</b>	<b>247</b>	43.4	244	42.3	251
465.tonto	308	31.9	<b>295</b>	<b>33.4</b>	291	33.8	215	45.9	216	45.6	<b>216</b>	<b>45.6</b>
470.lbm	8.14	1690	7.46	1840	<b>7.65</b>	<b>1800</b>	8.14	1690	7.46	1840	<b>7.65</b>	<b>1800</b>
481.wrf	109	102	109	103	<b>109</b>	<b>103</b>	109	102	109	103	<b>109</b>	<b>103</b>
482.sphinx3	<b>310</b>	<b>62.8</b>	310	62.8	308	63.3	<b>310</b>	<b>62.8</b>	310	62.8	308	63.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

BIOS Configuration  
Power Profile set to Custom  
Power Regulator set to Static High Performance Mode  
Minimum Processor Idle Power Core C-State set to C6 State  
Minimum Processor Idle Power Package C-State set to Package C6 (retention) State  
Energy/Performance Bias set to Maximum Performance  
Collaborative Power Control set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = 112

ProLiant DL580 Gen9  
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECfp\_base2006 = 106

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Mar-2015

### Platform Notes (Continued)

Thermal Configuration set to Maximum Cooling  
 Processor Power and Utilization Monitoring set to Disabled  
 Memory Refresh Rate set to 1x Refresh  
 Intel Hyperthreading Options set to Disabled  
 Sysinfo program /cpu2006/config/sysinfo.rev6914  
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
 running on localhost.localdomain Tue May 12 10:36:27 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E7-8870 v3 @ 2.10GHz
 4 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 18
  siblings     : 18
  physical 0: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 2: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 3: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size     : 46080 KB
```

```
From /proc/meminfo
MemTotal:      528072796 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 12 10:35

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = 112

ProLiant DL580 Gen9  
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECfp\_base2006 = 106

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Mar-2015

### Platform Notes (Continued)

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	368G	50G	319G	14%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U17 03/13/2015

Memory:

64x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz

### General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

OMP\_NUM\_THREADS = "72"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 112**

ProLiant DL580 Gen9  
(2.10 GHz, Intel Xeon E7-8870 v3)

**SPECfp\_base2006 = 106**

**CPU2006 license:** 3

**Test date:** May-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2015

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 112**

ProLiant DL580 Gen9  
(2.10 GHz, Intel Xeon E7-8870 v3)

**SPECfp\_base2006 = 106**

**CPU2006 license:** 3

**Test date:** May-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2015

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 112**

ProLiant DL580 Gen9  
(2.10 GHz, Intel Xeon E7-8870 v3)

**SPECfp\_base2006 = 106**

**CPU2006 license:** 3

**Test date:** May-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2015

## Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 13:48:29 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.