



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 1040

PowerEdge R530xd (Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_rate_base2006 = 1010

CPU2006 license: 55


Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

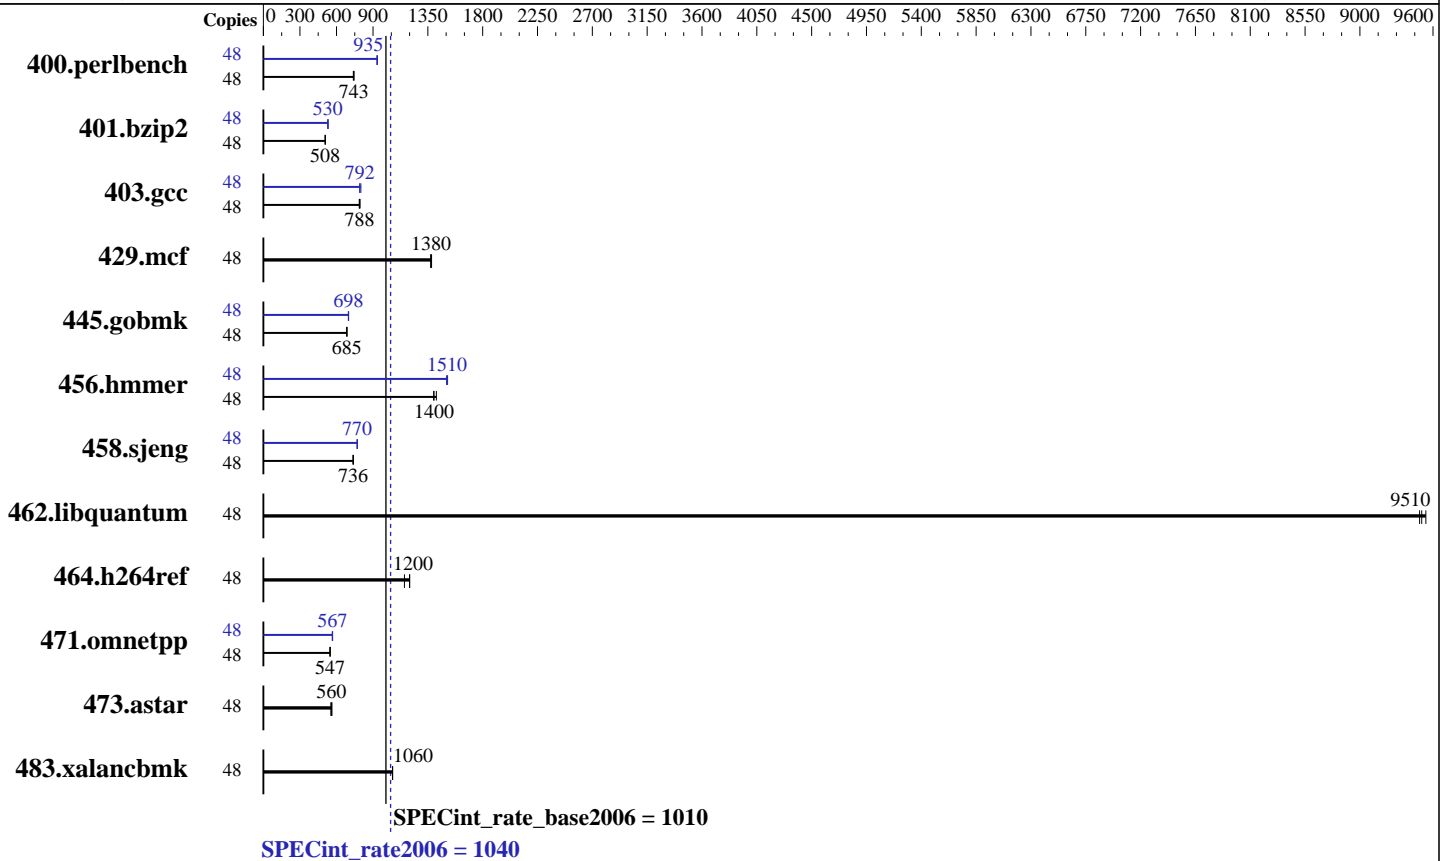

Hardware

CPU Name: Intel Xeon E5-2680 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 500 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1040

PowerEdge R530xd (Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_rate_base2006 = 1010

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	635	738	<u>632</u>	<u>743</u>	631	743	48	<u>502</u>	<u>935</u>	501	936	503	932
401.bzip2	48	911	509	<u>911</u>	<u>508</u>	914	507	48	873	530	875	529	<u>874</u>	<u>530</u>
403.gcc	48	487	794	<u>490</u>	<u>788</u>	491	787	48	488	791	<u>488</u>	<u>792</u>	483	800
429.mcf	48	317	1380	319	1370	<u>318</u>	<u>1380</u>	48	317	1380	319	1370	<u>318</u>	<u>1380</u>
445.gobmk	48	736	684	<u>735</u>	<u>685</u>	734	686	48	722	698	<u>721</u>	<u>698</u>	719	700
456.hammer	48	315	1420	<u>320</u>	<u>1400</u>	320	1400	48	298	1500	296	1510	<u>297</u>	<u>1510</u>
458.sjeng	48	789	736	<u>789</u>	<u>736</u>	785	740	48	<u>754</u>	<u>770</u>	753	771	755	770
462.libquantum	48	104	9540	<u>105</u>	<u>9510</u>	105	9490	48	104	9540	<u>105</u>	<u>9510</u>	105	9490
464.h264ref	48	917	1160	<u>885</u>	<u>1200</u>	885	1200	48	917	1160	<u>885</u>	<u>1200</u>	885	1200
471.omnetpp	48	549	547	<u>548</u>	<u>547</u>	547	548	48	<u>529</u>	<u>567</u>	528	568	530	566
473.astar	48	<u>602</u>	<u>560</u>	599	562	609	554	48	<u>602</u>	<u>560</u>	599	562	609	554
483.xalancbmk	48	313	1060	<u>312</u>	<u>1060</u>	312	1060	48	313	1060	<u>312</u>	<u>1060</u>	312	1060

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die

Virtualization Technology disabled

System Profile set to Performance

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Tue Apr 28 09:11:06 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2680 v3 @ 2.50GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1040

PowerEdge R530xd (Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_rate_base2006 = 1010

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2015
Hardware Availability: May-2015
Software Availability: Nov-2014

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 12
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264045124 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 28 09:10
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        ext4  489G  8.3G  456G   2% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.0 04/16/2015

Memory:
6x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz
10x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1040

PowerEdge R530xd (Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_rate_base2006 = 1010

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1040

PowerEdge R530xd (Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_rate_base2006 = 1010

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1040

PowerEdge R530xd (Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_rate_base2006 = 1010

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 17 10:49:50 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 June 2015.