SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4610 v3)

SPECint®_rate2006 = 1140

SPECint_rate_base2006 = 1090

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

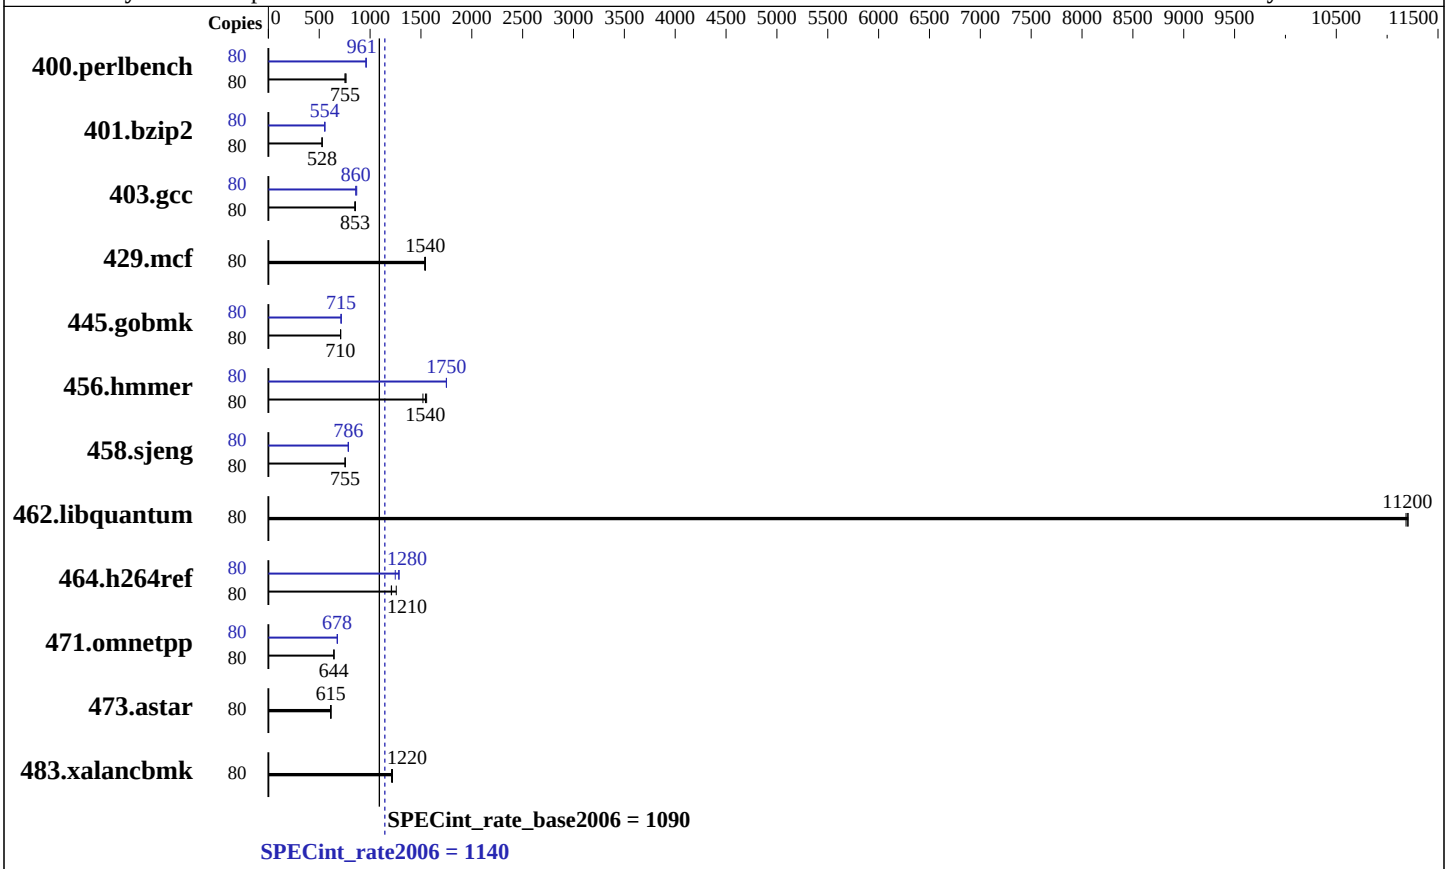

Hardware

CPU Name:	Intel Xeon E5-4610 v3
CPU Characteristics:	
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, runnning at 1600 MHz)
Disk Subsystem:	1 x 512 GB SATA III, SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12, Kernel 3.12.28-4-default
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4610 v3)

SPECint_rate2006 = 1140

SPECint_rate_base2006 = 1090

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	1036	755	1023	764	**1035**	**755**	80	**814**	**961**	812	962	814	960
401.bzip2	80	1459	529	1463	528	**1463**	**528**	80	1390	555	1393	554	**1393**	**554**
403.gcc	80	**755**	**853**	758	850	752	856	80	741	869	749	860	**748**	**860**
429.mcf	80	473	1540	**473**	**1540**	475	1540	80	473	1540	**473**	**1540**	475	1540
445.gobmk	80	**1181**	**710**	1180	711	1183	709	80	1172	716	**1173**	**715**	1173	715
456.hmmer	80	480	1560	491	1520	**483**	**1540**	80	426	1750	**426**	**1750**	426	1750
458.sjeng	80	1282	755	1283	755	**1282**	**755**	80	1231	786	**1231**	**786**	1231	786
462.libquantum	80	148	11200	**148**	**11200**	148	11200	80	148	11200	**148**	**11200**	148	11200
464.h264ref	80	1465	1210	**1462**	**1210**	1408	1260	80	**1382**	**1280**	1419	1250	1377	1290
471.omnetpp	80	775	645	**776**	**644**	776	644	80	**738**	**678**	736	679	738	677
473.astar	80	911	616	**913**	**615**	919	611	80	911	616	**913**	**615**	919	611
483.xalancbmk	80	452	1220	456	1210	**453**	**1220**	80	452	1220	456	1210	**453**	**1220**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
COD Enable = Enable
Early Snoop = Disable
Enforce POR = Disabled
Sysinfo program /home/SPEC2K6/SPEC2006-V12/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-rrui Tue Jun  9 12:18:52 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-4610 v3 @ 1.70GHz
      4 "physical id"s (chips)
      80 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

Platform Notes (Continued)

```
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 10
         siblings  : 20
         physical 0: cores 0 1 2 3 4 8 9 10 11 12
         physical 1: cores 0 1 2 3 4 8 9 10 11 12
         physical 2: cores 0 1 2 3 4 8 9 10 11 12
         physical 3: cores 0 1 2 3 4 8 9 10 11 12
      cache size : 25600 KB

   From /proc/meminfo
      MemTotal:       529331624 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      SUSE Linux Enterprise Server 12

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 12 (x86_64)
         VERSION = 12
         PATCHLEVEL = 0
         # This file is deprecated and will be removed in a future service pack or
         release.
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12"
         VERSION_ID="12"
         PRETTY_NAME="SUSE Linux Enterprise Server 12"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12"

   uname -a:
      Linux linux-rrui 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
      (9879bd4) x86_64 x86_64 x86_64 GNU/Linux

   run-level 5 Jun 9 11:47

   SPEC is set to: /home/SPEC2K6/SPEC2006-V12
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda3      ext4  458G  7.2G  450G   2% /home
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS American Megatrends Inc. 1.00 06/01/2015
```

Continued on next page

Platform Notes (Continued)

```
      Memory:
       16x NO DIMM NO DIMM
       1x Samsung(data:13/44) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
       1600 MHz
       1x Samsung(data:13/48) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
       1600 MHz
       3x Samsung(data:13/51) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
       1600 MHz
       2x Samsung(data:14/13) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
       1600 MHz
       1x Samsung(data:14/16) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
       1600 MHz
       5x Samsung(data:14/17) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
       1600 MHz
       1x Samsung(data:14/25) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
       1600 MHz
       14x Samsung(data:14/26) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
       1600 MHz
       4x Samsung(data:14/47) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
       1600 MHz

    (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPEC2K6/SPEC2006-V12/libs/32:/home/SPEC2K6/SPEC2006-V12/libs/64:/home/SPEC2K6/SPEC2006-V12/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 30 16:17:25 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 June 2015.