SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1028R-WMR
(X10DRW-E , Intel Xeon E5-2680 v3)

SPECint®_rate2006 = 1060

SPECint_rate_base2006 = 1030

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

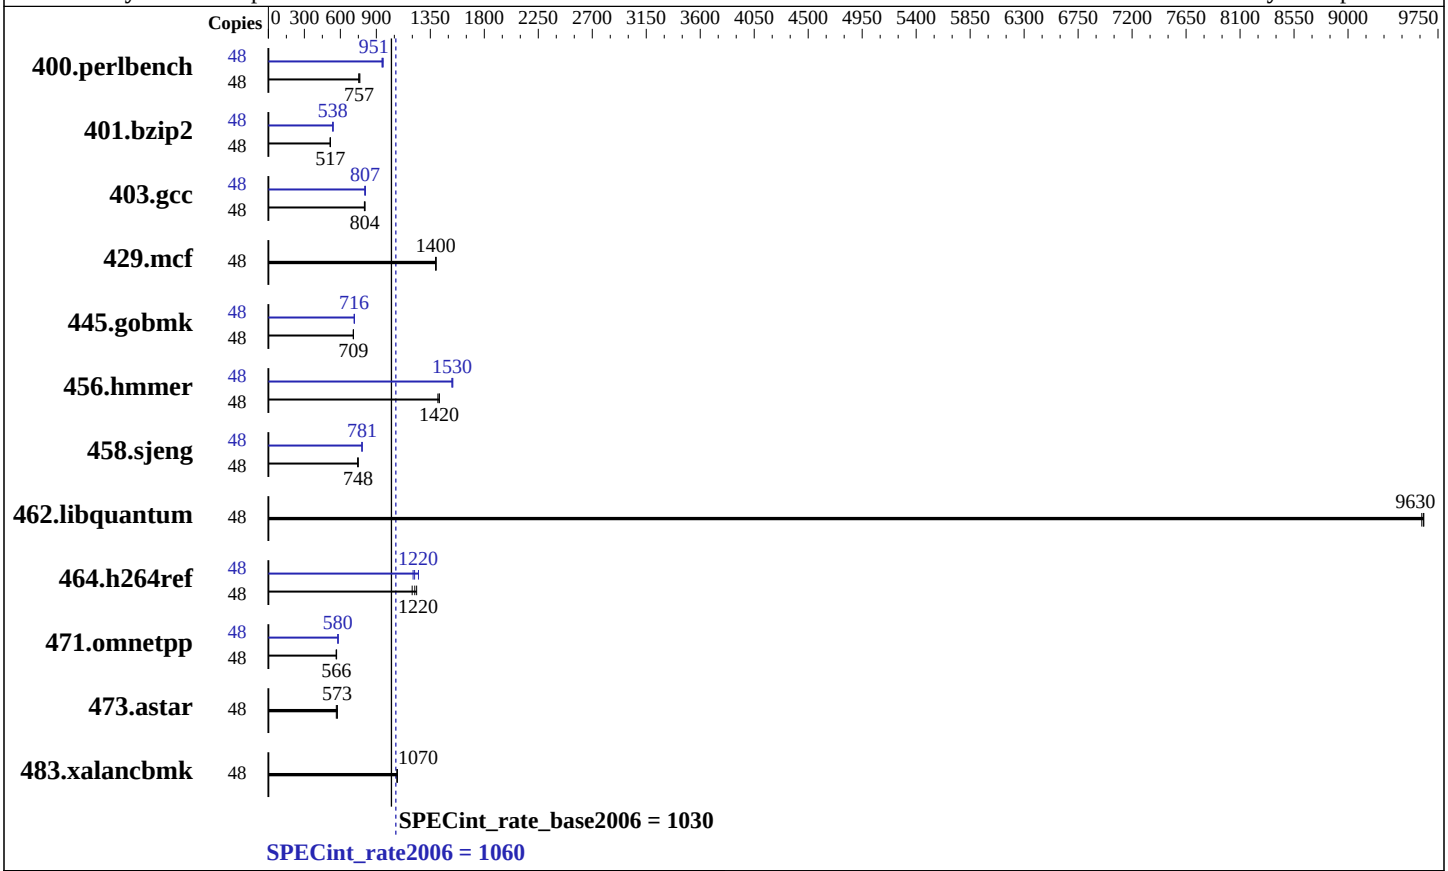

Hardware

CPU Name:	Intel Xeon E5-2680 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 200 GB SATA III SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.9.3.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	**620**	**757**	615	763	622	753	48	490	957	495	947	**493**	**951**
401.bzip2	48	**896**	**517**	896	517	900	515	48	858	540	**861**	**538**	863	537
403.gcc	48	480	805	**480**	**804**	483	800	48	478	809	481	804	**479**	**807**
429.mcf	48	314	1390	**313**	**1400**	313	1400	48	314	1390	**313**	**1400**	313	1400
445.gobmk	48	711	708	710	709	**711**	**709**	48	703	716	702	717	**703**	**716**
456.hmmer	48	**314**	**1420**	317	1410	314	1420	48	291	1540	**292**	**1530**	293	1530
458.sjeng	48	780	744	776	748	**777**	**748**	48	**744**	**781**	743	781	745	780
462.libquantum	48	103	9630	**103**	**9630**	103	9610	48	103	9630	**103**	**9630**	103	9610
464.h264ref	48	**870**	**1220**	859	1240	886	1200	48	**871**	**1220**	881	1210	849	1250
471.omnetpp	48	527	569	530	566	**530**	**566**	48	518	580	516	582	**517**	**580**
473.astar	48	595	566	**588**	**573**	586	575	48	595	566	**588**	**573**	586	575
483.xalancbmk	48	**308**	**1070**	309	1070	308	1070	48	**308**	**1070**	309	1070	308	1070

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
COD Enable = Enabled
Early Snoop = Disabled
Enforce POR = Disabled
Memory Frequency = 2133
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on X10DRW-01 Sat May 23 00:19:00 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2680 v3 @ 2.50GHz
      2 "physical id"s (chips)
      48 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 6
         siblings  : 12
         physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
         physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
      cache size : 15360 KB

   From /proc/meminfo
      MemTotal:       263865228 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      os-release:
         NAME="Red Hat Enterprise Linux Server"
         VERSION="7.0 (Maipo)"
         ID="rhel"
         ID_LIKE="fedora"
         VERSION_ID="7.0"
         PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
         ANSI_COLOR="0;31"
         CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
      redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
      system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

   uname -a:
      Linux X10DRW-01 3.10.0-123.9.3.el7.x86_64 #1 SMP Thu Oct 30 00:16:40 EDT 2014
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 May 22 23:56

   SPEC is set to: /usr/cpu2006
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      xfs   183G  7.3G  176G   4% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS American Megatrends Inc. 1.0a 01/07/2015
     Memory:
      16x Samsung (date:14/5r) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:
```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 30 16:17:45 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 June 2015.