



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp®_rate2006 = 757

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECfp_rate_base2006 = 737

CPU2006 license: 3358


Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

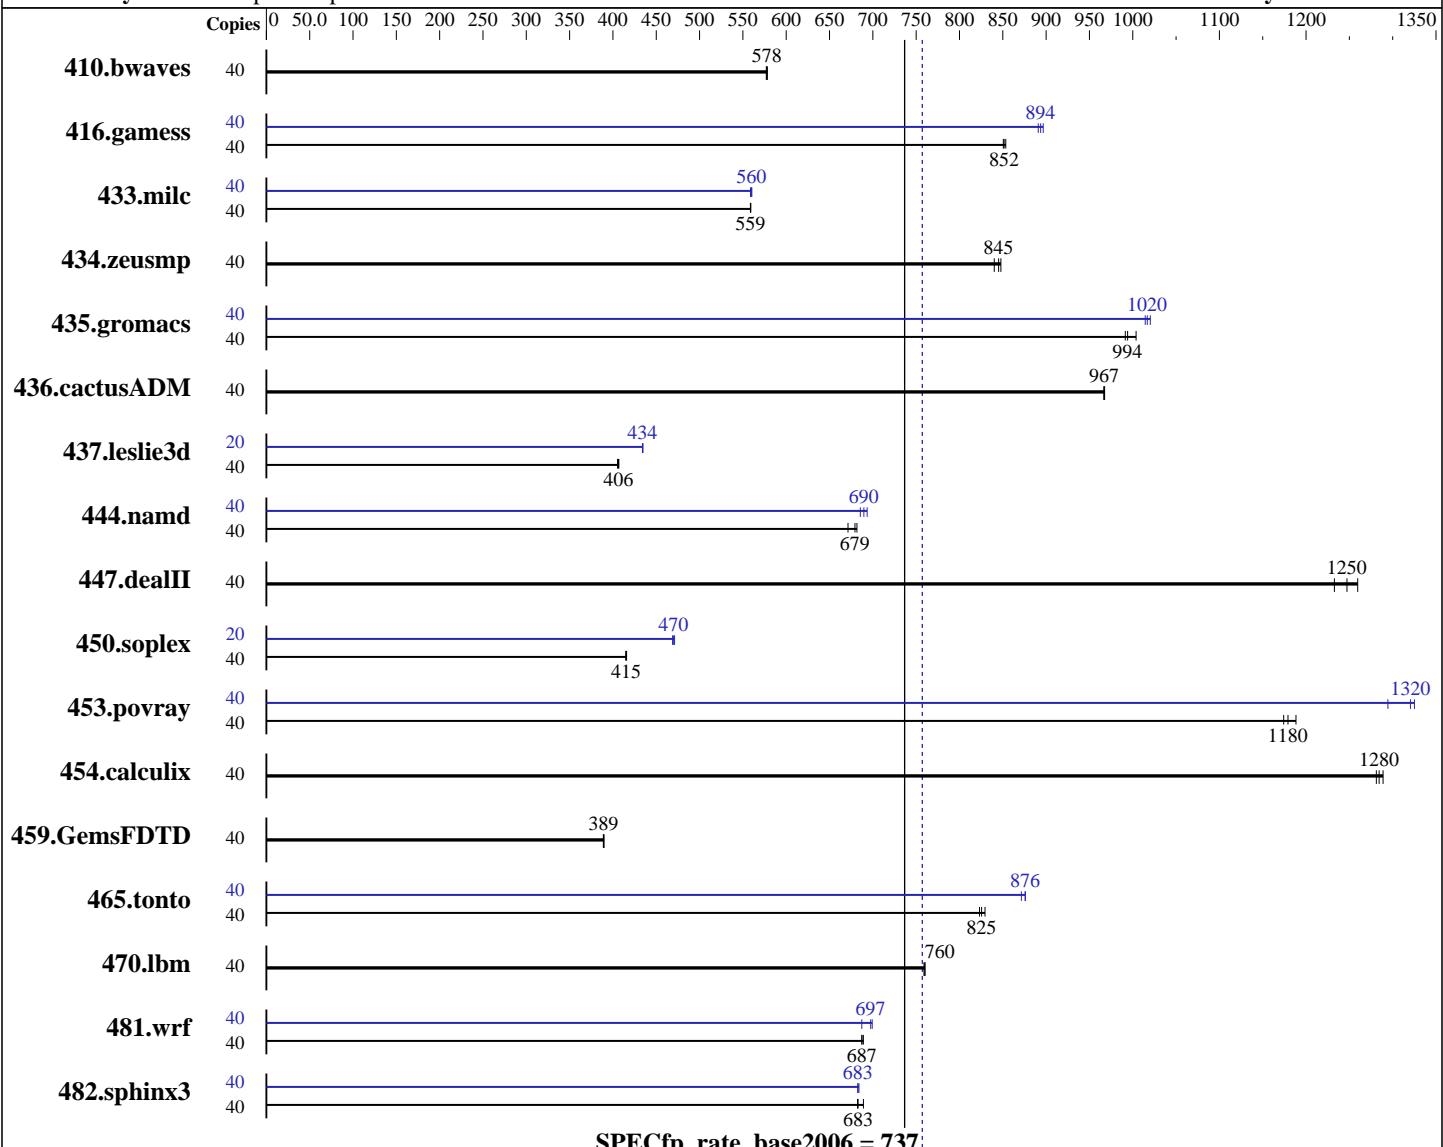

SPECfp_rate_base2006 = 737

SPECfp_rate2006 = 757

Hardware

CPU Name: Intel Xeon E5-2687W v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 Compiler: 3.10.0-229.el7.x86_64
 Auto Parallel: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 File System: No
 System State: xfs
 Base Pointers: Run level 5
 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECfp_rate2006 = 757

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 450 GB SATA SSD
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	941	578	942	577	940	578	40	941	578	942	577	940	578
416.gamess	40	918	853	921	851	920	852	40	879	891	873	897	876	894
433.milc	40	657	559	657	559	657	559	40	657	559	655	560	656	560
434.zeusmp	40	429	848	433	840	431	845	40	429	848	433	840	431	845
435.gromacs	40	288	991	285	1000	287	994	40	282	1010	280	1020	281	1020
436.cactusADM	40	495	967	494	968	494	967	40	495	967	494	968	494	967
437.leslie3d	40	928	405	925	406	924	407	20	433	434	432	435	433	434
444.namd	40	472	679	471	682	478	671	40	463	693	465	690	468	686
447.dealII	40	367	1250	363	1260	371	1230	40	367	1250	363	1260	371	1230
450.soplex	40	802	416	803	415	804	415	20	356	469	354	471	355	470
453.povray	40	179	1190	180	1180	181	1170	40	161	1320	161	1330	164	1290
454.calculix	40	258	1280	257	1280	256	1290	40	258	1280	257	1280	256	1290
459.GemsFDTD	40	1089	390	1091	389	1090	389	40	1089	390	1091	389	1090	389
465.tonto	40	478	823	477	825	475	829	40	449	876	449	876	452	871
470.lbm	40	723	760	724	759	723	760	40	723	760	724	759	723	760
481.wrf	40	648	689	650	687	650	687	40	650	687	641	697	639	699
482.sphinx3	40	1131	689	1143	682	1142	683	40	1142	683	1140	684	1142	683

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS and OS configuration:
 SCALING_GOVERNOR set to Performance
 Hardware Prefetch set to Disable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 757

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECfp_rate_base2006 = 737

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

Platform Notes (Continued)

Memory Frequency set to 2133 MHz

VT Support set to Disable

C1E Support set to Disable

Sysinfo program /home/CPU2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Sat Jul 11 22:36:56 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2687W v3 @ 3.10GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 10
        siblings : 20
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 12800 KB
```

```
From /proc/meminfo
MemTotal:      264037908 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.1 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.1"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Jul 10 14:27
```

```
SPEC is set to: /home/CPU2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   393G   68G  325G  18%  /home
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECfp_rate2006 = 757

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 4.0.1 10/30/2014

Memory:

8x NO DIMM NO DIMM

16x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 757

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECfp_rate_base2006 = 737

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

Base Portability Flags (Continued)

```
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 757

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECfp_rate_base2006 = 737

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -auto-ilp32
```

470.lbm: basepeak = yes

```
482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
              -unroll12
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 757

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECfp_rate_base2006 = 737

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 757

Inspur NF5280M4 (Intel Xeon E5-2687W v3)

SPECfp_rate_base2006 = 737

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 29 12:09:22 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 July 2015.