



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®2006 = 115

Express5800/B120f-h (Intel Xeon E5-2699 v3)

SPECfp_base2006 = 109

CPU2006 license: 9006


Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

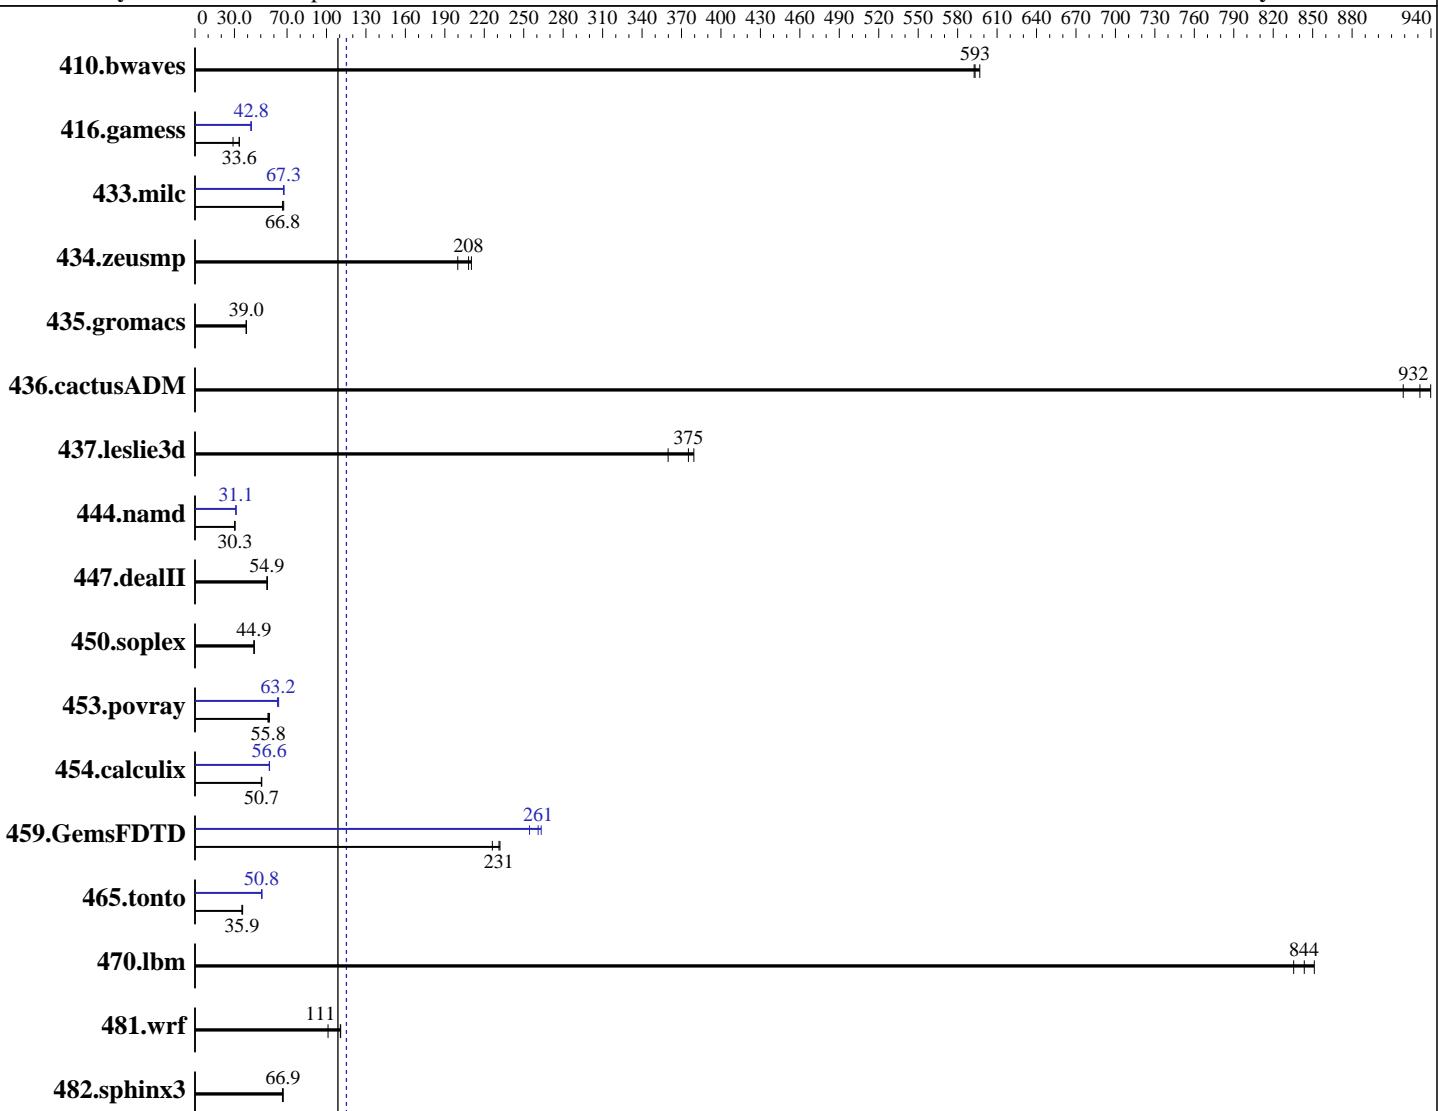

SPECfp_base2006 = 109

SPECfp2006 = 115

Hardware

CPU Name: Intel Xeon E5-2699 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)
 Compiler: Kernel 2.6.32-504.el6.x86_64
 C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f-h (Intel Xeon E5-2699 v3)

SPECfp2006 = 115

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: NEC Storage M100 via Fibre Channel
 (See additional details below)
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	22.9	593	<u>22.9</u>	<u>593</u>	22.8	597	22.9	593	<u>22.9</u>	<u>593</u>	22.8	597
416.gamess	582	33.6	677	28.9	581	33.7	461	42.5	457	42.8	458	42.8
433.milc	136	67.5	138	66.6	<u>137</u>	<u>66.8</u>	<u>136</u>	<u>67.3</u>	135	67.8	136	67.3
434.zeusmp	45.5	200	<u>43.7</u>	<u>208</u>	43.3	210	45.5	200	<u>43.7</u>	<u>208</u>	43.3	210
435.gromacs	183	39.0	<u>183</u>	<u>39.0</u>	183	39.0	183	39.0	<u>183</u>	<u>39.0</u>	183	39.0
436.cactusADM	12.7	940	13.0	919	<u>12.8</u>	<u>932</u>	12.7	940	13.0	919	<u>12.8</u>	<u>932</u>
437.leslie3d	25.0	375	26.1	360	24.8	379	25.0	375	26.1	360	24.8	379
444.namd	265	30.3	265	30.3	264	30.3	257	31.2	257	31.1	258	31.1
447.dealII	208	54.9	208	54.9	209	54.8	208	54.9	208	54.9	209	54.8
450.soplex	<u>186</u>	<u>44.9</u>	185	45.0	186	44.9	<u>186</u>	<u>44.9</u>	185	45.0	186	44.9
453.povray	94.0	56.6	<u>95.3</u>	<u>55.8</u>	95.8	55.5	<u>84.2</u>	<u>63.2</u>	83.6	63.6	84.7	62.8
454.calculix	164	50.5	163	50.7	<u>163</u>	<u>50.7</u>	146	56.7	<u>146</u>	<u>56.6</u>	146	56.6
459.GemsFDTD	46.9	226	45.7	232	<u>45.9</u>	<u>231</u>	40.3	263	<u>40.7</u>	<u>261</u>	41.7	254
465.tonto	274	35.9	272	36.2	275	35.8	194	50.7	194	50.8	194	50.8
470.lbm	<u>16.3</u>	<u>844</u>	16.4	836	16.1	851	<u>16.3</u>	<u>844</u>	16.4	836	16.1	851
481.wrf	101	111	110	101	<u>101</u>	<u>111</u>	101	111	110	101	<u>101</u>	<u>111</u>
482.sphinx3	<u>291</u>	<u>66.9</u>	293	66.5	291	67.0	<u>291</u>	<u>66.9</u>	293	66.5	291	67.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Energy Performance: Performance

Patrol Scrub: Disabled

Early Snoop: Disabled

Hyper-Threading: Disabled

Storage Configuration for Disk Subsystem:

NEC Storage M100 has 4 x 600 GB 10000 RPM SAS disks under RAID-10 configuration mounted over 8Gbps Fibre Channel interface with these options

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f-h (Intel Xeon E5-2699 v3)

SPECfp2006 =

115

SPECfp_base2006 =

109

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date:

Jul-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

Platform Notes (Continued)

"defaults" in the /etc/fstab.

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "36"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f-h (Intel Xeon E5-2699 v3)

SPECfp2006 = 115

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f-h (Intel Xeon E5-2699 v3)

SPECfp2006 =

115

SPECfp_base2006 =

109

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date:

Jul-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
             -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: basepeak = yes
```

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -inline-calloc -opt-malloc-options=3 -auto -unroll14
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias
```

```
481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.html>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f-h (Intel Xeon E5-2699 v3)

SPECfp2006 = 115

SPECfp_base2006 = 109

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-v1.2-B120f-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 25 17:52:47 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 August 2015.