



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 70.6

PowerEdge R330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_base2006 = 68.1

CPU2006 license: 55


Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

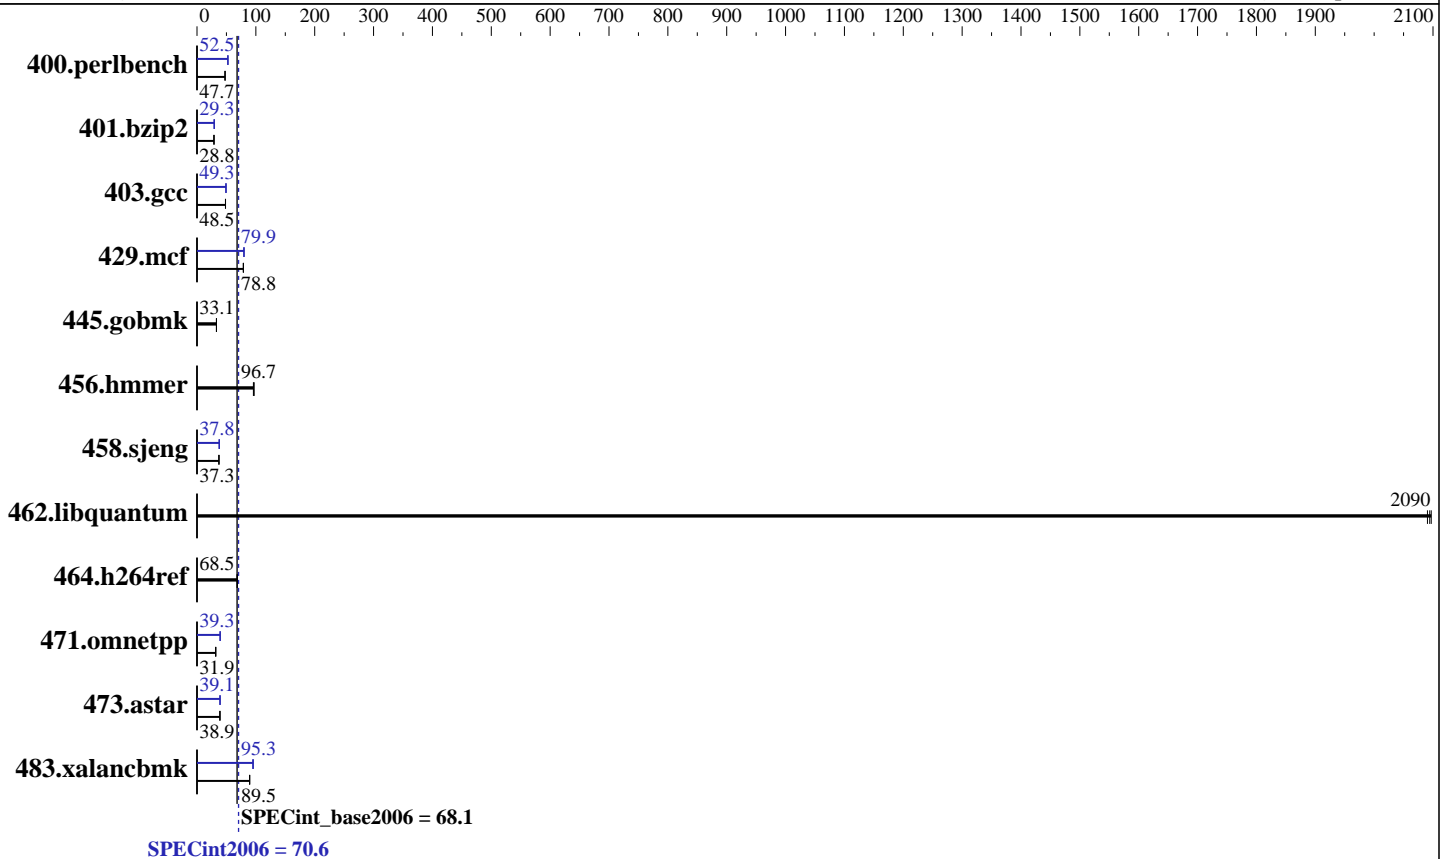

Hardware

CPU Name: Intel Xeon E3-1225 v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-U)
 Disk Subsystem: 1 x 500 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12
 3.12.28-4-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 multi-user
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 70.6

PowerEdge R330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_base2006 = 68.1

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	205	47.7	205	47.6	<u>205</u>	<u>47.7</u>	186	52.5	<u>186</u>	<u>52.5</u>	186	52.5
401.bzip2	334	28.9	335	28.8	<u>335</u>	<u>28.8</u>	330	29.2	330	29.3	<u>330</u>	<u>29.3</u>
403.gcc	<u>166</u>	<u>48.5</u>	167	48.3	166	48.5	164	49.1	163	49.4	<u>163</u>	<u>49.3</u>
429.mcf	116	78.9	<u>116</u>	<u>78.8</u>	116	78.7	115	79.6	114	80.0	<u>114</u>	<u>79.9</u>
445.gobmk	<u>317</u>	<u>33.1</u>	317	33.1	317	33.1	<u>317</u>	<u>33.1</u>	317	33.1	317	33.1
456.hammer	<u>96.5</u>	<u>96.7</u>	97.4	95.8	96.4	96.8	<u>96.5</u>	<u>96.7</u>	97.4	95.8	96.4	96.8
458.sjeng	<u>325</u>	<u>37.3</u>	325	37.2	325	37.3	320	37.8	<u>320</u>	<u>37.8</u>	320	37.8
462.libquantum	9.88	2100	9.91	2090	<u>9.89</u>	<u>2090</u>	9.88	2100	9.91	2090	<u>9.89</u>	<u>2090</u>
464.h264ref	322	68.6	324	68.2	<u>323</u>	<u>68.5</u>	322	68.6	324	68.2	<u>323</u>	<u>68.5</u>
471.omnetpp	198	31.6	196	31.9	<u>196</u>	<u>31.9</u>	159	39.2	<u>159</u>	<u>39.3</u>	159	39.4
473.astar	<u>181</u>	<u>38.9</u>	180	39.1	181	38.9	179	39.2	180	39.1	<u>179</u>	<u>39.1</u>
483.xalancbmk	77.0	89.6	<u>77.1</u>	<u>89.5</u>	77.3	89.2	<u>72.4</u>	<u>95.3</u>	72.2	95.6	72.8	94.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Virtualization Technology disabled

System Profile set to Performance

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-3mqb Wed Sep 30 20:14:21 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1225 v5 @ 3.30GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 70.6

PowerEdge R330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_base2006 = 68.1

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Platform Notes (Continued)

```
siblings : 4
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      66066084 kB
HugePages_Total:    0
Hugepagesize:   2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-3mqb 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 30 20:07
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  451G  8.4G  442G   2% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.3.16 09/09/2015

Memory:

```
1x 00AD00000000 HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz
2x 00AD0000020B HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz
1x 00AD00000800 HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 70.6

PowerEdge R330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_base2006 = 68.1

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmarthheap64



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 70.6

PowerEdge R330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_base2006 = 68.1

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
 -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div
 -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 70.6

PowerEdge R330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_base2006 = 68.1

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 70.6

PowerEdge R330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_base2006 = 68.1

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 17 19:15:35 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2015.