



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 192

PowerEdge T130 (Intel Xeon E3-1280 v5, 3.70 GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 55


Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

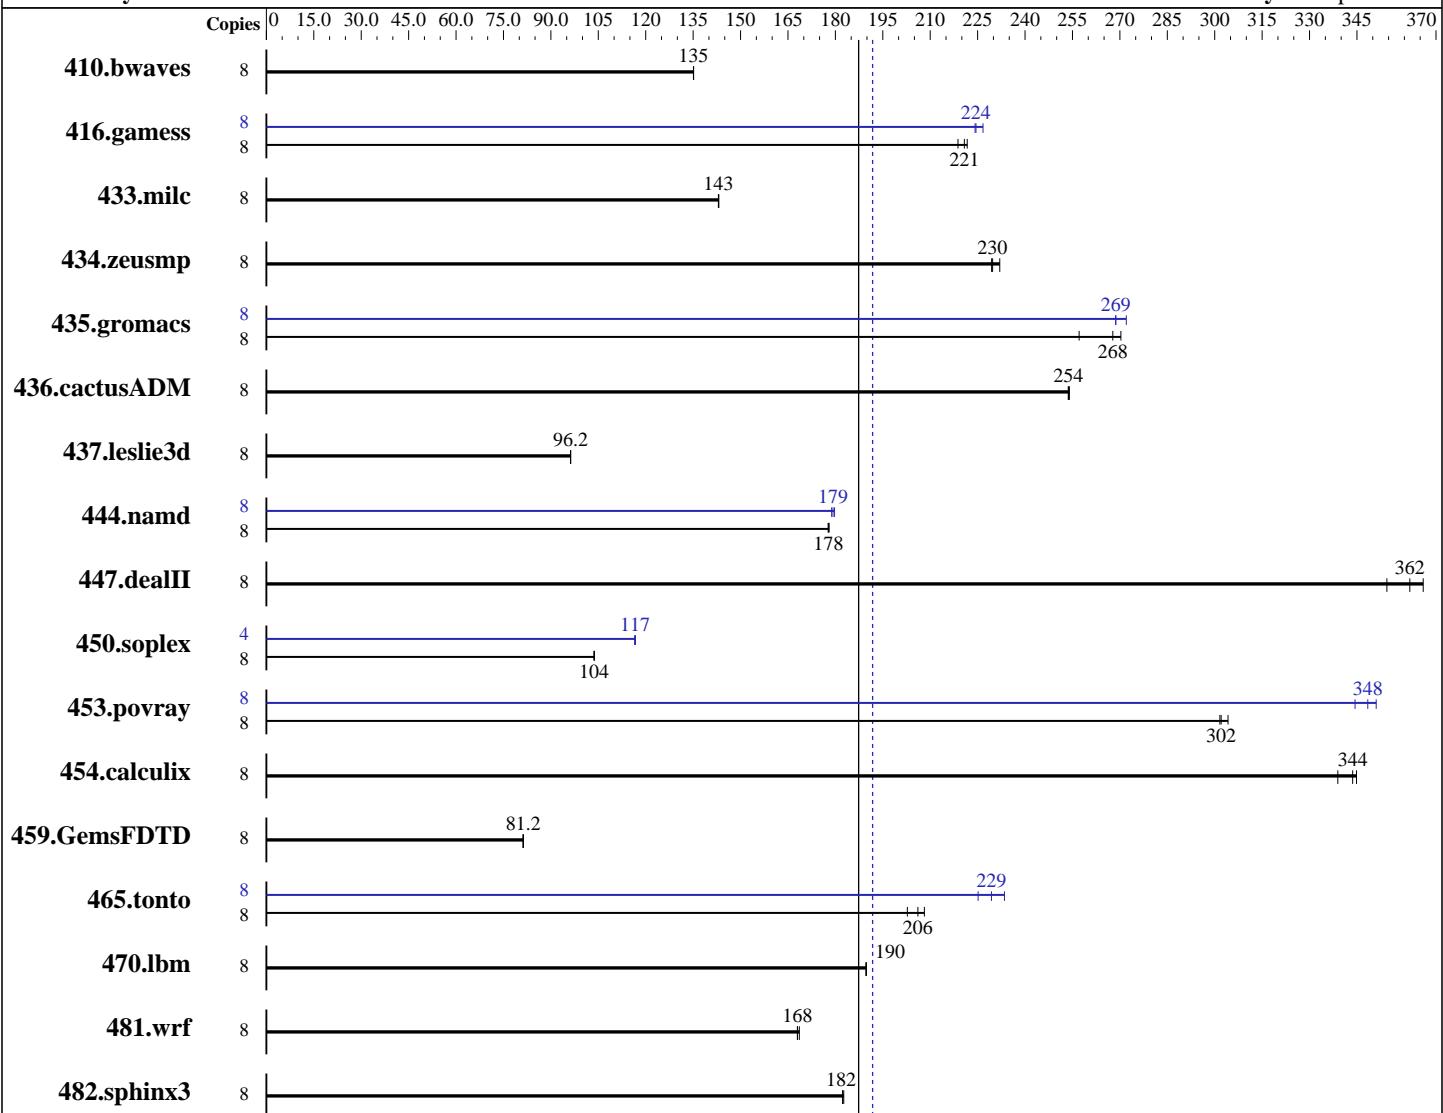

SPECfp_rate_base2006 = 187

SPECfp_rate2006 = 192

Hardware

CPU Name: Intel Xeon E3-1280 v5
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz
 CPU MHz: 3700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 3.12.28-4-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 multi-user

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 192

PowerEdge T130 (Intel Xeon E3-1280 v5, 3.70 GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-U)
 Disk Subsystem: 1 x 500 GB 7200 RPM SATA
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	804	135	<u>805</u>	<u>135</u>	805	135	8	804	135	<u>805</u>	<u>135</u>	805	135
416.gamess	8	707	222	716	219	<u>709</u>	<u>221</u>	8	<u>698</u>	<u>224</u>	691	227	699	224
433.milc	8	513	143	<u>513</u>	<u>143</u>	514	143	8	513	143	<u>513</u>	<u>143</u>	514	143
434.zeusmp	8	<u>317</u>	<u>230</u>	317	229	314	232	8	<u>317</u>	<u>230</u>	317	229	314	232
435.gromacs	8	<u>213</u>	<u>268</u>	211	270	222	257	8	<u>213</u>	<u>269</u>	213	269	210	272
436.cactusADM	8	<u>377</u>	<u>254</u>	377	254	376	254	8	<u>377</u>	<u>254</u>	377	254	376	254
437.leslie3d	8	781	96.3	782	96.2	<u>781</u>	<u>96.2</u>	8	781	96.3	782	96.2	<u>781</u>	<u>96.2</u>
444.namd	8	<u>361</u>	<u>178</u>	360	178	361	178	8	359	179	<u>358</u>	<u>179</u>	357	180
447.dealII	8	258	354	250	366	<u>253</u>	<u>362</u>	8	258	354	250	366	<u>253</u>	<u>362</u>
450.soplex	8	644	104	<u>643</u>	<u>104</u>	643	104	4	286	116	<u>286</u>	<u>117</u>	286	117
453.povray	8	140	304	141	302	<u>141</u>	<u>302</u>	8	<u>122</u>	<u>348</u>	124	344	121	351
454.calculix	8	191	345	195	339	<u>192</u>	<u>344</u>	8	191	345	195	339	<u>192</u>	<u>344</u>
459.GemsFDTD	8	1044	81.3	<u>1045</u>	<u>81.2</u>	1045	81.2	8	1044	81.3	<u>1045</u>	<u>81.2</u>	1045	81.2
465.tonto	8	378	208	388	203	<u>382</u>	<u>206</u>	8	<u>343</u>	<u>229</u>	350	225	337	233
470.lbm	8	579	190	<u>579</u>	<u>190</u>	579	190	8	579	190	<u>579</u>	<u>190</u>	579	190
481.wrf	8	<u>532</u>	<u>168</u>	530	169	532	168	8	<u>532</u>	<u>168</u>	530	169	532	168
482.sphinx3	8	<u>855</u>	<u>182</u>	854	183	855	182	8	<u>855</u>	<u>182</u>	854	183	855	182

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Virtualization Technology disabled
 System Profile set to Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 192

PowerEdge T130 (Intel Xeon E3-1280 v5, 3.70 GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Platform Notes (Continued)

```
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$
running on linux-gvm0 Thu Sep 17 23:33:36 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E3-1280 v5 @ 3.70GHz
        1 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings : 8
    physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:       66066084 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12"
    VERSION_ID="12"
    PRETTY_NAME="SUSE Linux Enterprise Server 12"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
```

```
Linux linux-gvm0 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 17 15:36
```

```
SPEC is set to: /root/cpu2006-1.2
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 192

PowerEdge T130 (Intel Xeon E3-1280 v5, 3.70 GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2015

Hardware Availability: Nov-2015

Software Availability: Sep-2015

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	451G	9.5G	441G	3%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.3.16 09/09/2015

Memory:

1x 00AD00000000	HMA82GU7MFR8N-TF	16 GB	2 rank	2133 MHz
2x 00AD0000020B	HMA82GU7MFR8N-TF	16 GB	2 rank	2133 MHz
1x 00AD00000800	HMA82GU7MFR8N-TF	16 GB	2 rank	2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 192

PowerEdge T130 (Intel Xeon E3-1280 v5, 3.70 GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 192

PowerEdge T130 (Intel Xeon E3-1280 v5, 3.70 GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 192

PowerEdge T130 (Intel Xeon E3-1280 v5, 3.70 GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test date: Sep-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T130 (Intel Xeon E3-1280 v5, 3.70 GHz)

SPECfp_rate2006 = 192

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2015

Hardware Availability: Nov-2015

Software Availability: Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:17:05 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2015.