SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECint®_rate2006 = 881

SPECint_rate_base2006 = 837

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2015
Hardware Availability: Jun-2016
Software Availability: Sep-2015

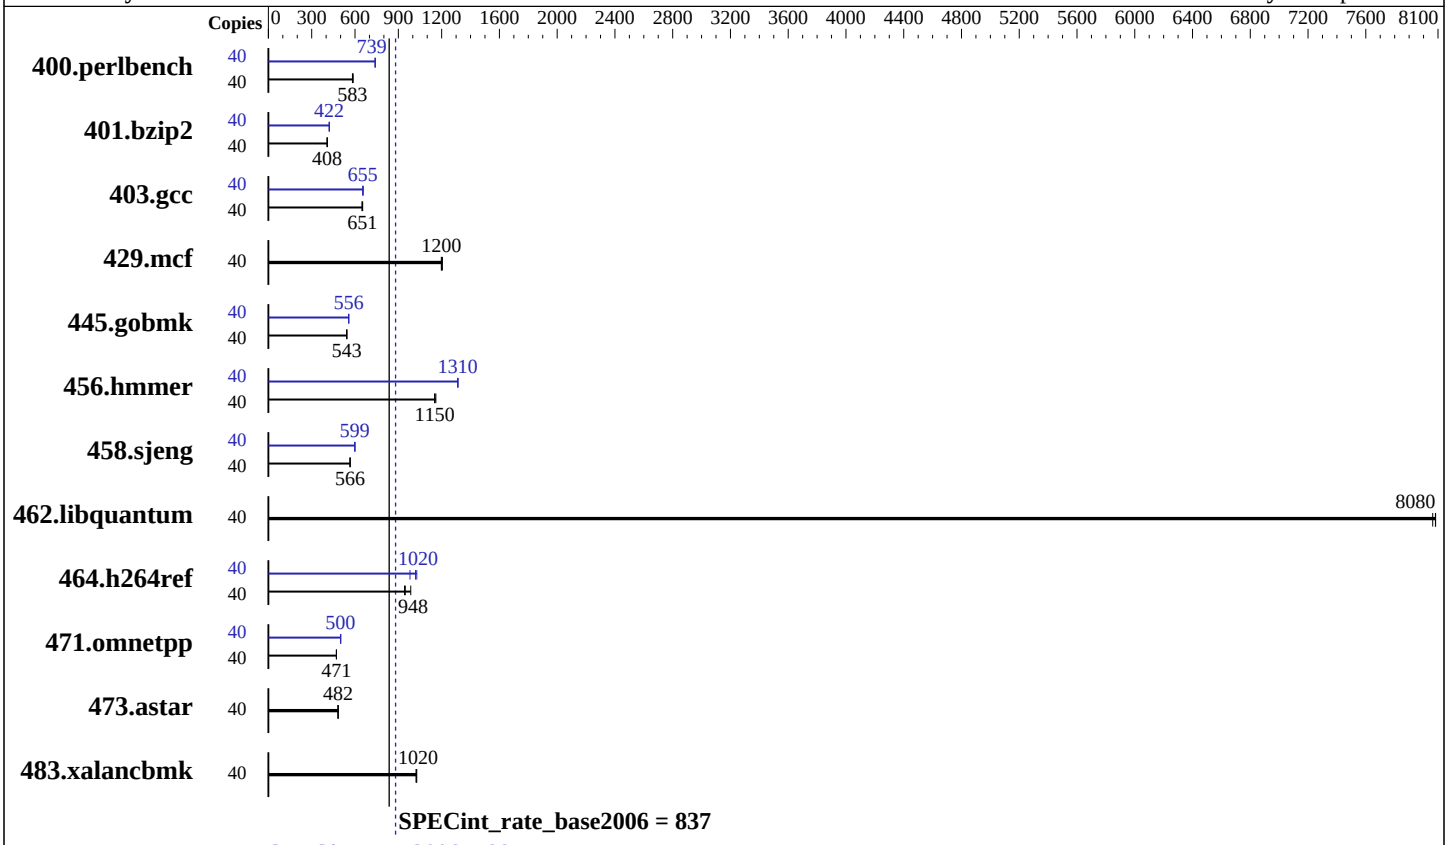

Hardware

CPU Name:	Intel Xeon E5-2650 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 480 GB SATA SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 3.12.28-4-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECint_rate2006 = 881

SPECint_rate_base2006 = 837

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2015
Hardware Availability: Jun-2016
Software Availability: Sep-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	665	587	671	582	**670**	**583**	40	**529**	**739**	527	741	529	739
401.bzip2	40	951	406	**946**	**408**	946	408	40	**915**	**422**	915	422	915	422
403.gcc	40	**495**	**651**	493	653	497	648	40	**492**	**655**	491	656	493	653
429.mcf	40	**304**	**1200**	303	1210	305	1200	40	**304**	**1200**	303	1210	305	1200
445.gobmk	40	773	543	772	543	**773**	**543**	40	**754**	**556**	754	556	754	556
456.hmmer	40	**324**	**1150**	324	1150	322	1160	40	**285**	**1310**	285	1310	284	1310
458.sjeng	40	**855**	**566**	856	566	855	566	40	808	599	**808**	**599**	808	599
462.libquantum	40	103	8080	**103**	**8080**	103	8060	40	103	8080	**103**	**8080**	103	8060
464.h264ref	40	898	986	**934**	**948**	939	943	40	**869**	**1020**	861	1030	903	981
471.omnetpp	40	**530**	**471**	531	471	530	472	40	**500**	**500**	499	501	500	500
473.astar	40	581	483	**582**	**482**	582	482	40	581	483	**582**	**482**	582	482
483.xalancbmk	40	269	1030	270	1020	**270**	**1020**	40	269	1030	270	1020	**270**	**1020**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology disabled
System Profile set to Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-0b3v Wed Nov 18 17:18:31 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2650 v3 @ 2.30GHz
      2 "physical id"s (chips)
      40 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 5
         siblings  : 10
         physical 0: cores 0 1 2 3 4 8 9 10 11 12
         physical 1: cores 0 1 2 3 4 8 9 10 11 12
      cache size : 12800 KB

   From /proc/meminfo
      MemTotal:       264569160 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      SUSE Linux Enterprise Server 12

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 12 (x86_64)
         VERSION = 12
         PATCHLEVEL = 0
         # This file is deprecated and will be removed in a future service pack or
         release.
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12"
         VERSION_ID="12"
         PRETTY_NAME="SUSE Linux Enterprise Server 12"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12"

   uname -a:
      Linux linux-0b3v 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
      (9879bd4) x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Nov 18 17:05 last=5

   SPEC is set to: /root/cpu2006-1.2
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      ext4  439G   12G  416G   3% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS Dell Inc. 1.3.6 06/03/2015
     Memory:
```

Continued on next page

Platform Notes (Continued)

```
      3x 00AD00B300AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz
      4x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz
      4x 00AD063200AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz
      5x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz
      8x Not Specified Not Specified

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

  Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
  memory using RedHat EL 7.1
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
    400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
      401.bzip2: -D_FILE_OFFSET_BITS=64
        403.gcc: -D_FILE_OFFSET_BITS=64
        429.mcf: -D_FILE_OFFSET_BITS=64
      445.gobmk: -D_FILE_OFFSET_BITS=64
      456.hmmer: -D_FILE_OFFSET_BITS=64
      458.sjeng: -D_FILE_OFFSET_BITS=64
  462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
    464.h264ref: -D_FILE_OFFSET_BITS=64
    471.omnetpp: -D_FILE_OFFSET_BITS=64
      473.astar: -D_FILE_OFFSET_BITS=64
  483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 15 16:46:41 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 December 2015.