



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECint_rate2006 = 261

SPECint_rate_base2006 = 251

CPU2006 license: 9017


Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

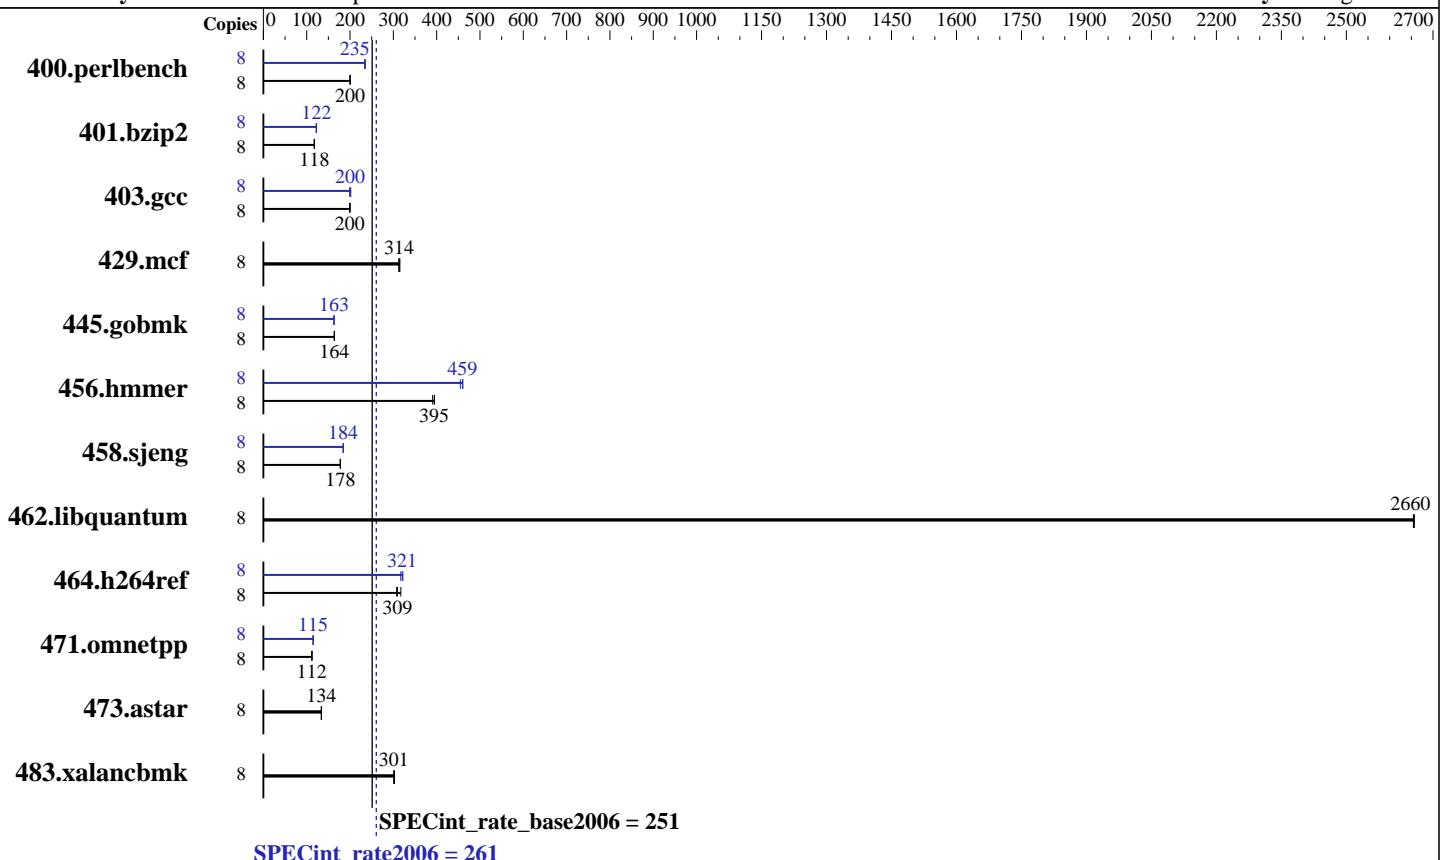

Hardware

| | |
|----------------------|---|
| CPU Name: | Intel Xeon E3-1280 v5 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 4.00 GHz |
| CPU MHz: | 3700 |
| FPU: | Integrated |
| CPU(s) enabled: | 4 cores, 1 chip, 4 cores/chip, 2 threads/core |
| CPU(s) orderable: | 1 chip |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 8 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 32 GB (4 x 8 GB 2Rx8 PC4-2133P-U) |
| Disk Subsystem: | 1 x 800 GB SATA SSD |
| Other Hardware: | None |

Software

| | |
|-------------------|--|
| Operating System: | SUSE Linux Enterprise Server 12 (x86_64) |
| Compiler: | Kernel 3.12.28-4-default |
| Auto Parallel: | C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux |
| File System: | No |
| System State: | xfs |
| Base Pointers: | Run level 3 (multi-user) |
| Peak Pointers: | 32-bit |
| Other Software: | 32/64-bit |
| | Microquill SmartHeap V10.2 |



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECint_rate2006 = 261

SPECint_rate_base2006 = 251

CPU2006 license: 9017

Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|-------------|-------------|------------|------------|------------|------------|--------|-------------|-------------|------------|------------|------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 8 | 390 | 200 | 390 | 200 | 391 | 200 | 8 | 333 | 235 | 335 | 234 | 333 | 235 |
| 401.bzip2 | 8 | 660 | 117 | 654 | 118 | 654 | 118 | 8 | 632 | 122 | 629 | 123 | 633 | 122 |
| 403.gcc | 8 | 323 | 199 | 323 | 200 | 321 | 200 | 8 | 321 | 200 | 319 | 202 | 323 | 199 |
| 429.mcf | 8 | 233 | 312 | 233 | 314 | 232 | 315 | 8 | 233 | 312 | 233 | 314 | 232 | 315 |
| 445.gobmk | 8 | 512 | 164 | 512 | 164 | 513 | 164 | 8 | 515 | 163 | 515 | 163 | 515 | 163 |
| 456.hammer | 8 | 189 | 395 | 189 | 395 | 191 | 391 | 8 | 162 | 461 | 162 | 459 | 164 | 455 |
| 458.sjeng | 8 | 546 | 177 | 544 | 178 | 544 | 178 | 8 | 525 | 185 | 525 | 184 | 525 | 184 |
| 462.libquantum | 8 | 62.4 | 2660 | 62.4 | 2650 | 62.4 | 2660 | 8 | 62.4 | 2660 | 62.4 | 2650 | 62.4 | 2660 |
| 464.h264ref | 8 | 572 | 309 | 558 | 317 | 576 | 308 | 8 | 550 | 322 | 552 | 321 | 558 | 317 |
| 471.omnetpp | 8 | 445 | 112 | 447 | 112 | 446 | 112 | 8 | 436 | 115 | 435 | 115 | 435 | 115 |
| 473.astar | 8 | 420 | 134 | 420 | 134 | 418 | 134 | 8 | 420 | 134 | 420 | 134 | 418 | 134 |
| 483.xalancbmk | 8 | 182 | 303 | 183 | 301 | 183 | 301 | 8 | 182 | 303 | 183 | 301 | 183 | 301 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

Platform Notes

BIOS configuration:

EIST Support set to Enabled

Intel (R) Hyper-Threading set to Enabled

C1E Support set to Enabled

C State Support set to Enabled

Turbo Mode set to Enable

```
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
```

```
$Rev: 6914 $ $Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
```

```
running on TS450-SLE12 Wed Dec 9 16:39:12 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECint_rate2006 = 261

SPECint_rate_base2006 = 251

CPU2006 license: 9017

Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1280 v5 @ 3.70GHz
        1 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings : 8
    physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      32932732 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux TS450-SLE12 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 9 14:25
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda3        xfs   600G  7.6G  593G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO FWKT27A 11/04/2015
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECint_rate2006 = 261

SPECint_rate_base2006 = 251

CPU2006 license: 9017

Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Platform Notes (Continued)

Memory:

4x Samsung M378A1G43DB0-CPB 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hammer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECint_rate2006 = 261

SPECint_rate_base2006 = 251

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Dec-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64  
403.gcc: -D_FILE_OFFSET_BITS=64  
429.mcf: -D_FILE_OFFSET_BITS=64  
445.gobmk: -D_FILE_OFFSET_BITS=64  
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64  
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64  
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX  
464.h264ref: -D_FILE_OFFSET_BITS=64  
471.omnetpp: -D_FILE_OFFSET_BITS=64  
473.astar: -D_FILE_OFFSET_BITS=64  
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECint_rate2006 = 261

SPECint_rate_base2006 = 251

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Dec-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECint_rate2006 = 261

SPECint_rate_base2006 = 251

CPU2006 license: 9017

Test date: Dec-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 30 19:59:12 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 December 2015.