



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-L
(X11SSL-F , Intel Xeon E3-1240L v5)

SPECfp®_rate2006 = 172

SPECfp_rate_base2006 = 168

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

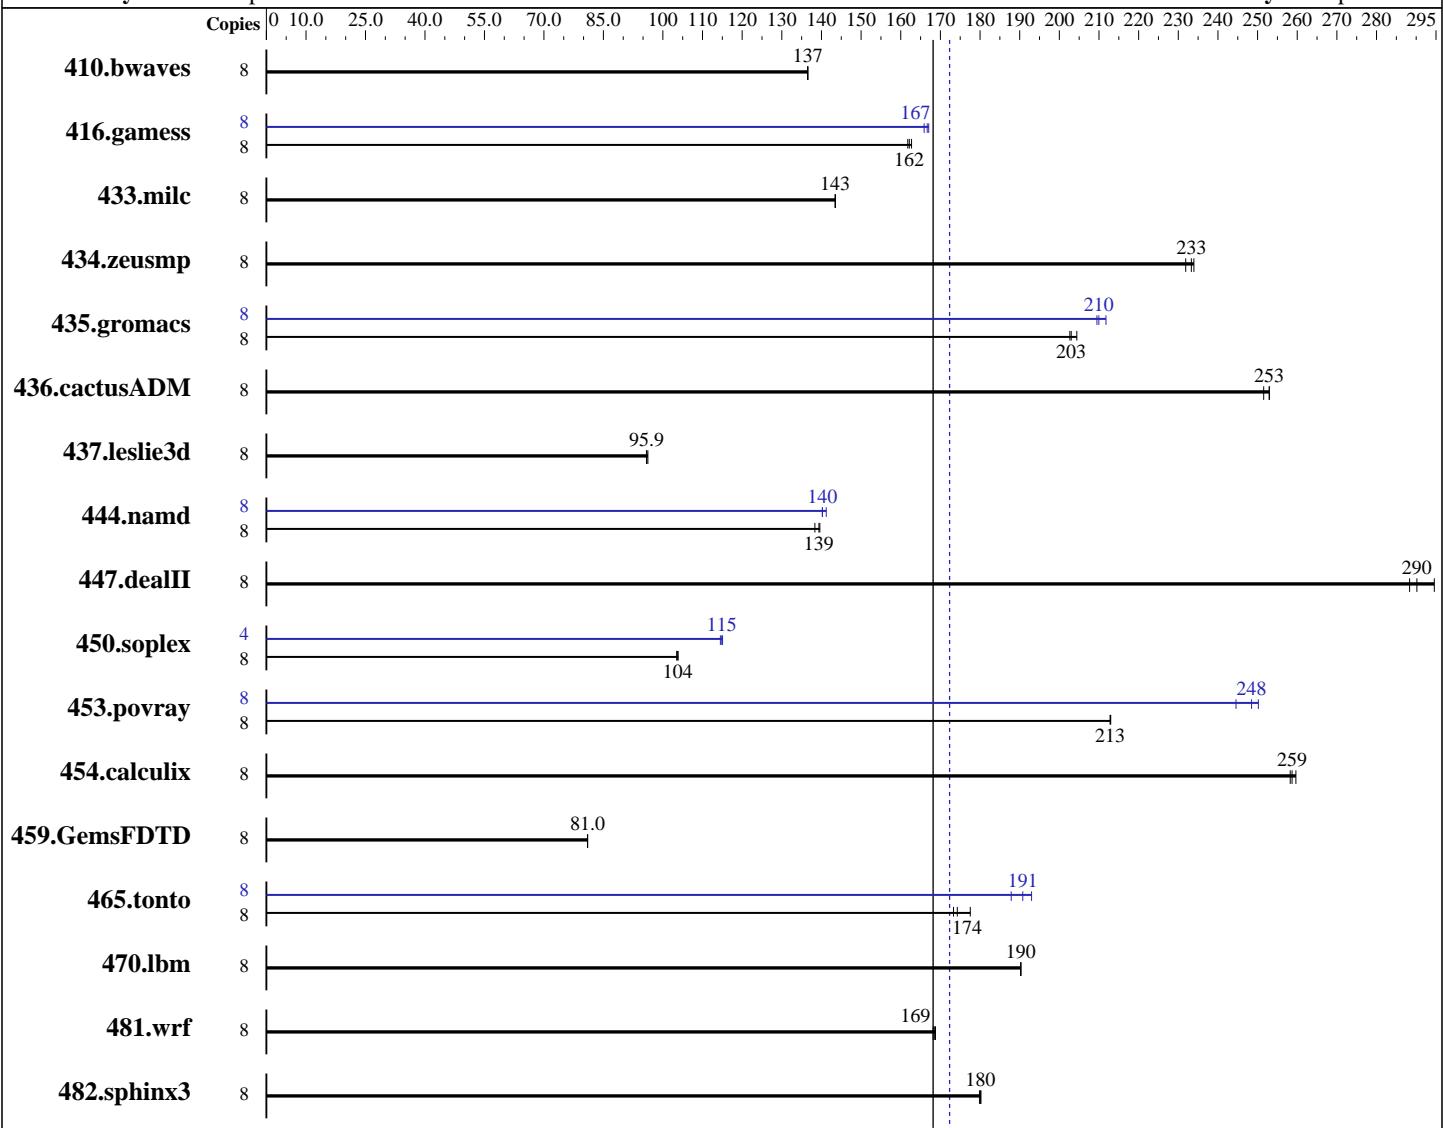

SPECfp_rate_base2006 = 168

SPECfp_rate2006 = 172

Hardware

CPU Name: Intel Xeon E3-1240L v5
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz: 2100
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-L
(X11SSL-F, Intel Xeon E3-1240L v5)

SPECfp_rate2006 = 172

SPECfp_rate_base2006 = 168

CPU2006 license: 001176

Test date: Dec-2015

Test sponsor: Supermicro

Hardware Availability: Oct-2015

Tested by: Supermicro

Software Availability: Sep-2015

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx8 PC4-2133P-U)
Disk Subsystem: 1 x 600 GB SATA, 7200 RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	796	137	796	137	796	137	8	796	137	796	137	796	137
416.gamess	8	968	162	966	162	963	163	8	944	166	938	167	940	167
433.milc	8	512	143	512	144	512	143	8	512	143	512	144	512	143
434.zeusmp	8	311	234	312	233	314	232	8	311	234	312	233	314	232
435.gromacs	8	279	204	282	203	281	203	8	270	212	272	210	273	209
436.cactusADM	8	380	252	378	253	378	253	8	380	252	378	253	378	253
437.leslie3d	8	782	96.2	784	95.9	784	95.9	8	782	96.2	784	95.9	784	95.9
444.namd	8	460	139	464	138	460	140	8	458	140	457	140	454	141
447.dealII	8	317	288	311	295	315	290	8	317	288	311	295	315	290
450.soplex	8	643	104	643	104	645	103	4	290	115	290	115	291	115
453.povray	8	200	213	200	213	200	213	8	171	248	170	250	174	245
454.calculix	8	254	260	256	258	255	259	8	254	260	256	258	255	259
459.GemsFDTD	8	1047	81.0	1048	81.0	1048	81.0	8	1047	81.0	1048	81.0	1048	81.0
465.tonto	8	443	178	454	173	452	174	8	408	193	419	188	413	191
470.lbm	8	578	190	578	190	578	190	8	578	190	578	190	578	190
481.wrf	8	529	169	531	168	530	169	8	529	169	531	168	530	169
482.sphinx3	8	865	180	867	180	866	180	8	865	180	867	180	866	180

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Mon Dec 14 23:14:06 2015

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-L
(X11SSL-F , Intel Xeon E3-1240L v5)

SPECfp_rate2006 = 172

SPECfp_rate_base2006 = 168

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1240L v5 @ 2.10GHz
        1 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings : 8
    physical 0: cores 0 1 2 3
    cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      32602468 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.1 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.1"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 14 13:51
```

```
SPEC is set to: /home/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   412G  164G  248G  40%  /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-L
(X11SSL-F , Intel Xeon E3-1240L v5)

SPECfp_rate2006 = 172

SPECfp_rate_base2006 = 168

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Platform Notes (Continued)

BIOS American Megatrends Inc. 1.0b 11/20/2015

Memory:

4x Micron 16ATF1G64AZ-2G1A2 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-L
(X11SSL-F , Intel Xeon E3-1240L v5)

SPECfp_rate2006 = 172

SPECfp_rate_base2006 = 168

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-L
(X11SSL-F , Intel Xeon E3-1240L v5)

SPECfp_rate2006 = 172

SPECfp_rate_base2006 = 168

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-L
(X11SSL-F , Intel Xeon E3-1240L v5)

SPECfp_rate2006 = 172

SPECfp_rate_base2006 = 168

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 12 15:45:34 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 January 2016.