



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS150  
(3.50 GHz, Intel Xeon E3-1245 v5)

**SPECfp®2006 = 98.9**

**SPECfp\_base2006 = 96.5**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

**Test date:** Jan-2016

**Hardware Availability:** Oct-2015

**Software Availability:** Aug-2015

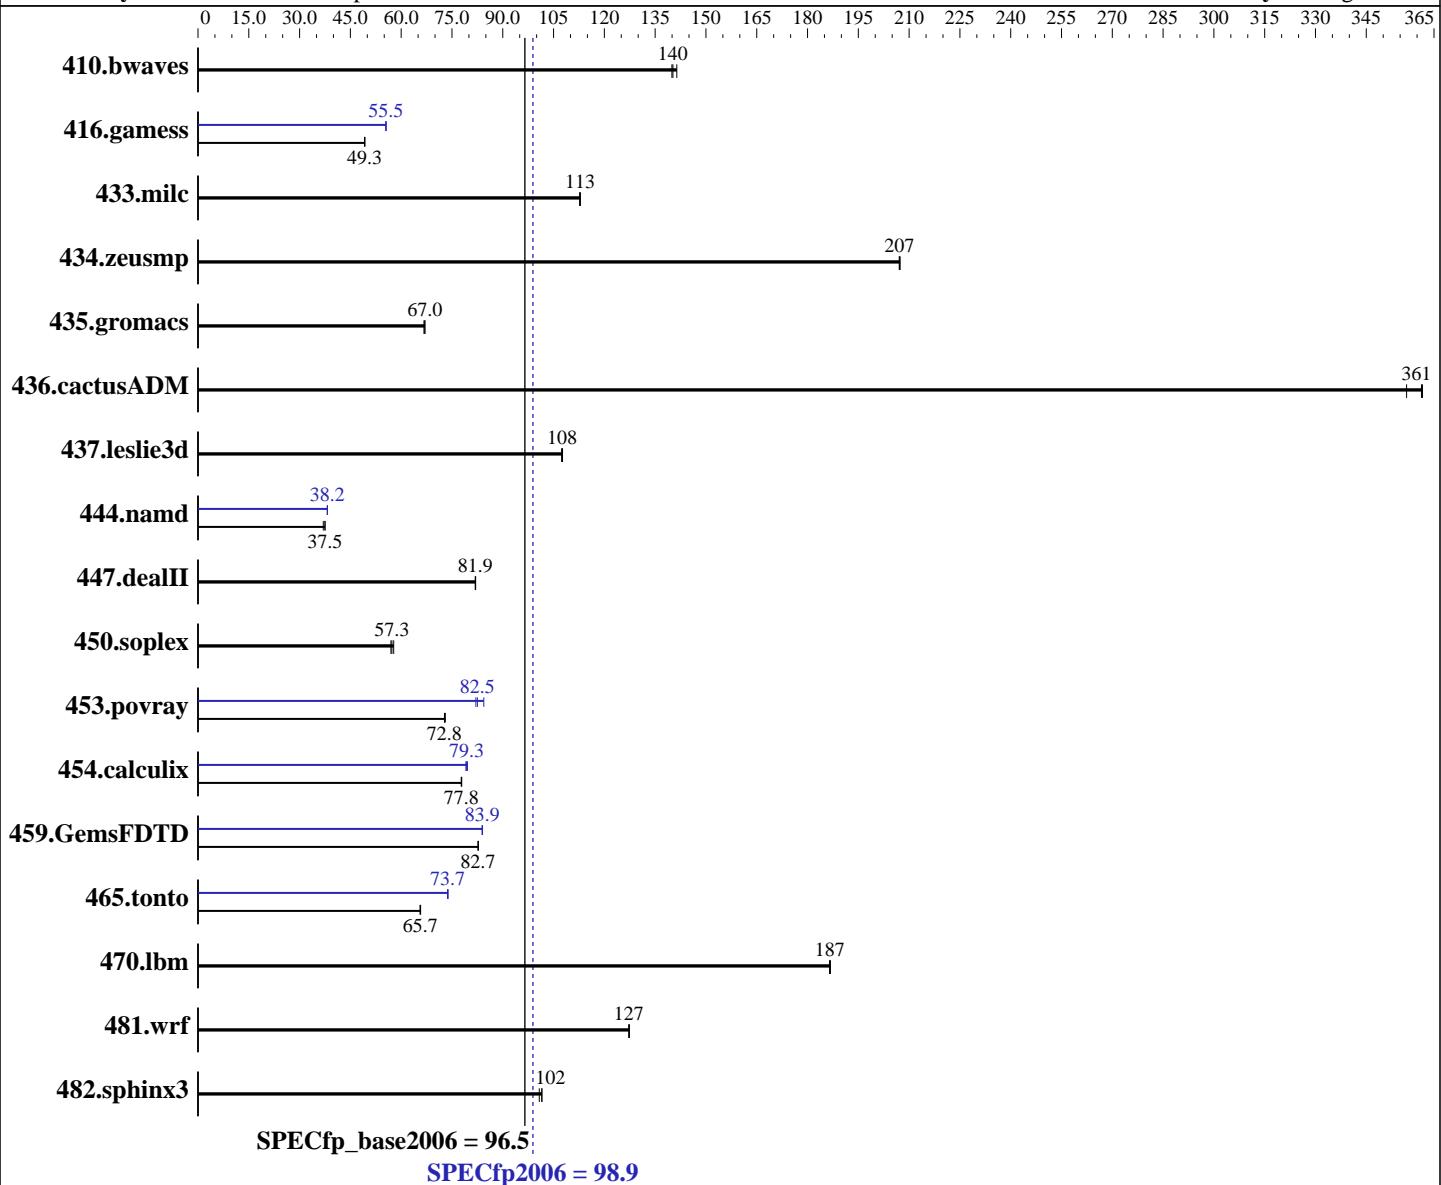

### Hardware

CPU Name: Intel Xeon E3-1245 v5  
CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
CPU MHz: 3500  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64)  
Kernel 3.12.28-4-default  
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS150  
(3.50 GHz, Intel Xeon E3-1245 v5)

**SPECfp2006 = 98.9**

**SPECfp\_base2006 = 96.5**

**CPU2006 license:** 9017

**Test date:** Jan-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Oct-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Aug-2015

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (4 x 8 GB 2Rx8 PC4-2133P-U)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>96.9</b>	<b>140</b>	96.1	141	97.1	140	<b>96.9</b>	<b>140</b>	96.1	141	97.1	140
416.gamess	398	49.2	398	49.3	<b>398</b>	<b>49.3</b>	353	55.5	<b>353</b>	<b>55.5</b>	353	55.5
433.milc	81.3	113	81.5	113	<b>81.4</b>	<b>113</b>	81.3	113	81.5	113	<b>81.4</b>	<b>113</b>
434.zeusmp	43.9	207	43.9	207	<b>43.9</b>	<b>207</b>	43.9	207	43.9	207	<b>43.9</b>	<b>207</b>
435.gromacs	107	67.0	107	66.7	<b>107</b>	<b>67.0</b>	107	67.0	107	66.7	<b>107</b>	<b>67.0</b>
436.cactusADM	33.0	362	33.5	357	<b>33.1</b>	<b>361</b>	33.0	362	33.5	357	<b>33.1</b>	<b>361</b>
437.leslie3d	87.3	108	87.5	107	<b>87.4</b>	<b>108</b>	87.3	108	87.5	107	<b>87.4</b>	<b>108</b>
444.namd	214	37.5	217	37.0	<b>214</b>	<b>37.5</b>	<b>210</b>	<b>38.2</b>	210	38.2	210	38.2
447.dealII	<b>140</b>	<b>81.9</b>	140	82.0	140	81.9	<b>140</b>	<b>81.9</b>	140	82.0	140	81.9
450.soplex	<b>146</b>	<b>57.3</b>	144	57.8	146	57.0	<b>146</b>	<b>57.3</b>	144	57.8	146	57.0
453.povray	72.8	73.0	73.1	72.8	<b>73.1</b>	<b>72.8</b>	<b>64.5</b>	<b>82.5</b>	63.0	84.4	64.8	82.1
454.calculix	106	77.9	106	77.7	<b>106</b>	<b>77.8</b>	<b>104</b>	<b>79.3</b>	104	79.1	104	79.6
459.GemsFDTD	<b>128</b>	<b>82.7</b>	128	82.8	128	82.7	<b>126</b>	<b>84.0</b>	<b>126</b>	<b>83.9</b>	126	83.9
465.tonto	<b>150</b>	<b>65.7</b>	150	65.7	150	65.6	<b>133</b>	<b>73.7</b>	134	73.7	133	73.8
470.lbm	73.7	186	73.6	187	<b>73.6</b>	<b>187</b>	73.7	186	73.6	187	<b>73.6</b>	<b>187</b>
481.wrf	87.8	127	87.7	127	<b>87.8</b>	<b>127</b>	87.8	127	87.7	127	<b>87.8</b>	<b>127</b>
482.sphinx3	<b>192</b>	<b>102</b>	192	102	193	101	<b>192</b>	<b>102</b>	192	102	193	101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Configuration:

EIST Support set to Enabled  
Intel (R) Hyper-Threading set to Disabled

C1E Support set to Enabled

C State Support set to Enabled

Turbo Mode set to Enable

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1  
running on TS150 Thu Jan 14 13:12:13 2016

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS150  
(3.50 GHz, Intel Xeon E3-1245 v5)

**SPECfp2006 = 98.9**

**SPECfp\_base2006 = 96.5**

**CPU2006 license:** 9017

**Test date:** Jan-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Oct-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Aug-2015

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1245 v5 @ 3.50GHz
        1 "physical id"s (chips)
        4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      32933324 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12"
    VERSION_ID="12"
    PRETTY_NAME="SUSE Linux Enterprise Server 12"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux TS150 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014 (9879bd4)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 14 09:02
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda3        xfs   693G   27G   667G   4% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS150  
(3.50 GHz, Intel Xeon E3-1245 v5)

**SPECfp2006 = 98.9**

**SPECfp\_base2006 = 96.5**

**CPU2006 license:** 9017

**Test date:** Jan-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Oct-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Aug-2015

## Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO FWKT32A 12/25/2015

Memory:

4x Samsung M378A1G43DB0-CPB 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS150  
(3.50 GHz, Intel Xeon E3-1245 v5)

**SPECfp2006 = 98.9**

**SPECfp\_base2006 = 96.5**

**CPU2006 license:** 9017

**Test date:** Jan-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Oct-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Aug-2015

## Base Portability Flags (Continued)

```
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS150  
(3.50 GHz, Intel Xeon E3-1245 v5)

**SPECfp2006 = 98.9**

**SPECfp\_base2006 = 96.5**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Jan-2016

**Hardware Availability:** Oct-2015

**Software Availability:** Aug-2015

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS150  
(3.50 GHz, Intel Xeon E3-1245 v5)

**SPECfp2006 = 98.9**

**SPECfp\_base2006 = 96.5**

**CPU2006 license:** 9017

**Test date:** Jan-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Oct-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Aug-2015

## Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 9 17:21:48 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 February 2016.