



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp®2006 =**

**123**

**SPECfp\_base2006 =**

**115**

CPU2006 license: 3

Test sponsor: HPE


Tested by: HPE

**Test date:**

Mar-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

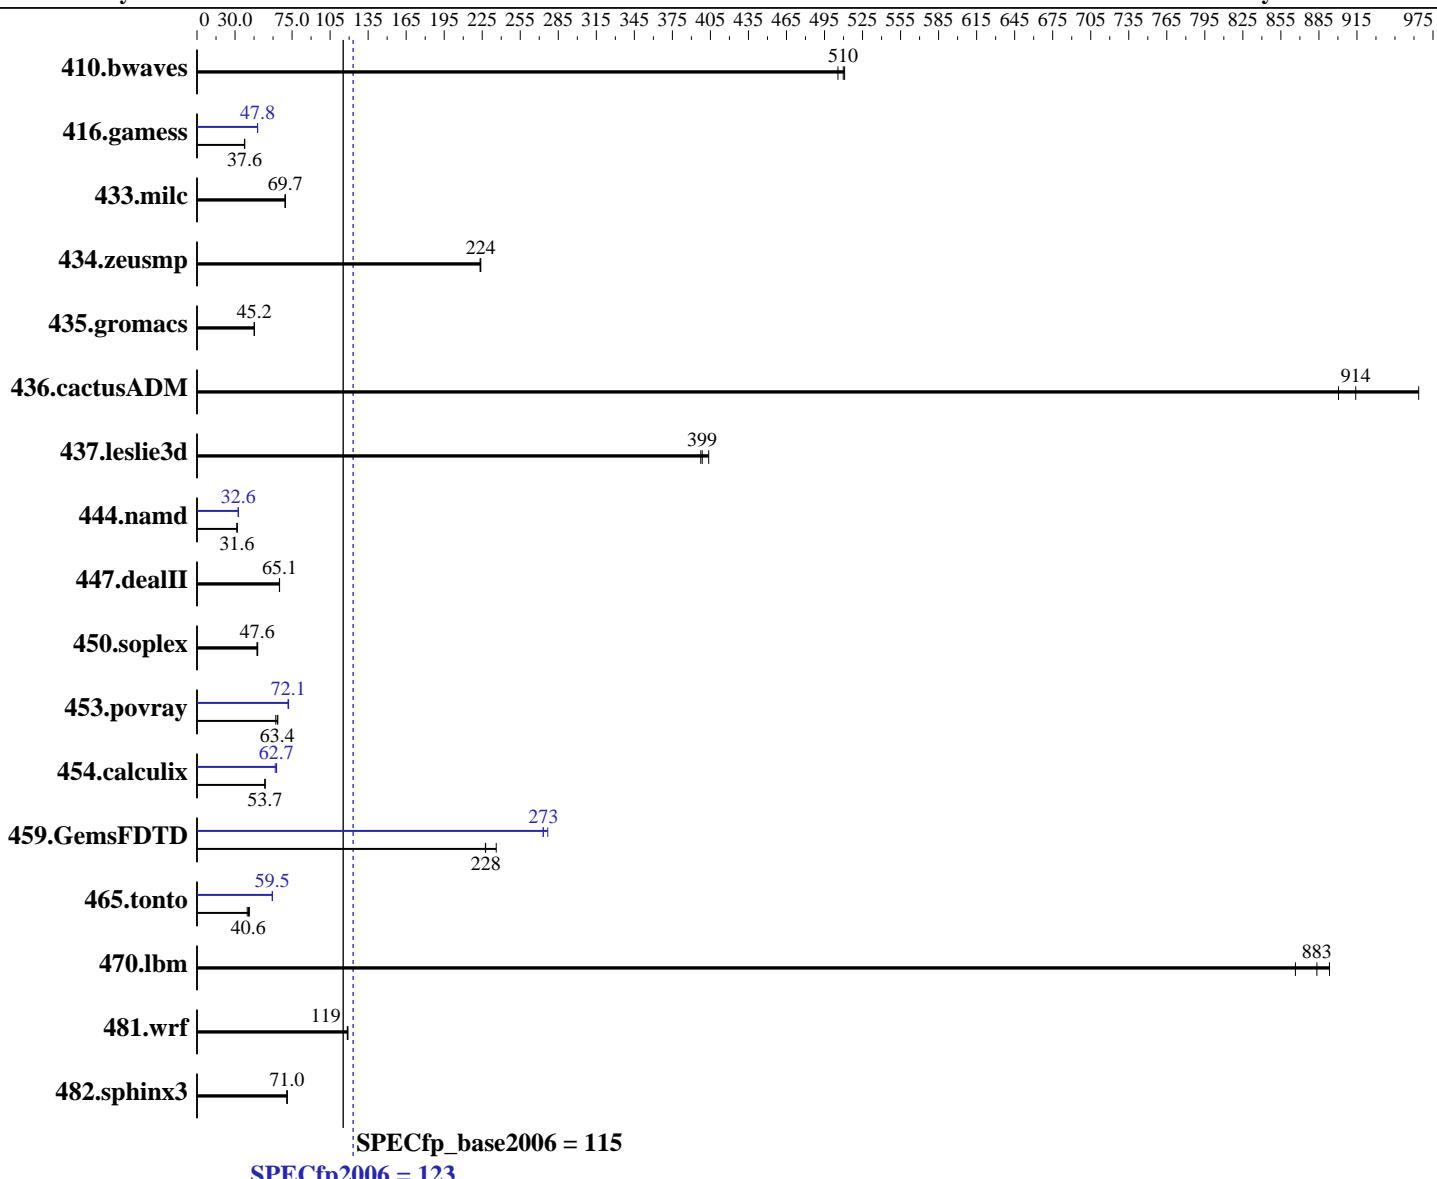

## Hardware

CPU Name:	Intel Xeon E5-2699 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	44 cores, 2 chips, 22 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

## Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL360 Gen9  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp2006 = 123**

**SPECfp\_base2006 = 115**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Mar-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

L3 Cache: 55 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<b>26.7</b>	<b>510</b>	26.6	511	26.9	506	<b>26.7</b>	<b>510</b>	26.6	511	26.9	506
416.gamess	523	37.4	<b>521</b>	<b>37.6</b>	520	37.6	<b>410</b>	<b>47.8</b>	<b>410</b>	<b>47.8</b>	410	47.8
433.milc	<b>132</b>	<b>69.7</b>	132	69.4	132	69.8	<b>132</b>	<b>69.7</b>	132	69.4	132	69.8
434.zeusmp	40.8	223	<b>40.7</b>	<b>224</b>	40.7	224	<b>40.8</b>	<b>223</b>	<b>40.7</b>	<b>224</b>	40.7	224
435.gromacs	158	45.3	<b>158</b>	<b>45.2</b>	158	45.1	<b>158</b>	<b>45.3</b>	<b>158</b>	<b>45.2</b>	158	45.1
436.cactusADM	13.3	900	<b>13.1</b>	<b>914</b>	12.4	964	<b>13.3</b>	<b>900</b>	<b>13.1</b>	<b>914</b>	12.4	964
437.leslie3d	23.7	397	<b>23.6</b>	<b>399</b>	23.3	404	<b>23.7</b>	<b>397</b>	<b>23.6</b>	<b>399</b>	23.3	404
444.namd	<b>254</b>	<b>31.6</b>	254	31.6	253	31.7	<b>246</b>	<b>32.6</b>	246	32.6	<b>246</b>	<b>32.6</b>
447.dealII	<b>176</b>	<b>65.1</b>	176	65.1	176	65.0	<b>176</b>	<b>65.1</b>	176	65.1	176	65.0
450.soplex	176	47.4	174	47.9	<b>175</b>	<b>47.6</b>	<b>176</b>	<b>47.4</b>	174	47.9	<b>175</b>	<b>47.6</b>
453.povray	83.4	63.8	<b>84.0</b>	<b>63.4</b>	85.7	62.1	<b>73.8</b>	<b>72.1</b>	74.0	71.8	73.6	72.3
454.calculix	<b>154</b>	<b>53.7</b>	154	53.6	154	53.7	<b>131</b>	<b>62.8</b>	134	61.7	<b>132</b>	<b>62.7</b>
459.GemsFDTD	45.0	236	46.6	228	<b>46.6</b>	<b>228</b>	<b>38.9</b>	<b>273</b>	38.3	277	<b>38.8</b>	<b>273</b>
465.tonto	<b>242</b>	<b>40.6</b>	248	39.6	238	41.3	<b>166</b>	<b>59.5</b>	166	59.5	166	59.4
470.lbm	15.9	866	<b>15.6</b>	<b>883</b>	15.4	893	<b>15.9</b>	<b>866</b>	<b>15.6</b>	<b>883</b>	15.4	893
481.wrf	93.8	119	94.2	119	<b>94.1</b>	<b>119</b>	<b>93.8</b>	<b>119</b>	94.2	119	<b>94.1</b>	<b>119</b>
482.sphinx3	275	71.0	274	71.1	<b>274</b>	<b>71.0</b>	<b>275</b>	<b>71.0</b>	274	71.1	<b>274</b>	<b>71.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Platform Notes

BIOS Configuration:

Intel Hyperthreading Option set to Disabled

Power Profile set to Custom

Power Regulator set to Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C6 State

Minimum Processor Idle Power Package C-State set to No Package State

Collaborative Power Control set to Disabled

QPI Snoop Configuration set to Home Snoop

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp2006 =**

**123**

**SPECfp\_base2006 =**

**115**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Mar-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Platform Notes (Continued)

Thermal Configuration set to Maximum Cooling  
 Processor Power and Utilization Monitoring set to Disabled  
 Memory Refresh Rate set to 1x Refresh  
 Energy Performance Bias set to Maximum Performance  
 Sysinfo program /cpu2006/config/sysinfo.rev6914  
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1  
 running on dl360gen9-broadwell-justin.perflab.hp.com Fri Mar 4 04:02:26 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
        2 "physical id"s (chips)
        44 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 22
siblings : 22
physical 0: cores 0 2 3 4 8 10 11 12 16 17 18 19 20 21 24 25 26 27 28
physical 1: cores 0 2 3 4 8 10 11 12 16 17 18 19 20 21 24 25 26 27 28
cache size : 56320 KB
```

```
From /proc/meminfo
MemTotal:      528065224 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.2 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.2"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux dl360gen9-broadwell-justin.perflab.hp.com 3.10.0-327.el7.x86_64 #1 SMP
Thu Oct 29 17:29:29 EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 3 23:16

SPEC is set to: /cpu2006
 Filesystem Type Size Used Avail Use% Mounted on
 Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp2006 =**

**123**

**SPECfp\_base2006 =**

**115**

**CPU2006 license:** 3

**Test date:** Mar-2016

**Test sponsor:** HPE

**Hardware Availability:** Mar-2016

**Tested by:** HPE

**Software Availability:** Nov-2015

## Platform Notes (Continued)

```
/dev/sda4      xfs   368G  7.1G  361G  2% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P89 02/22/2016

Memory:

```
8x UNKNOWN NOT AVAILABLE
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:  
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

OMP\_NUM\_THREADS = "44"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp2006 =**

**123**

**SPECfp\_base2006 =**

**115**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Mar-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Base Portability Flags (Continued)

```
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp2006 =**

**123**

**SPECfp\_base2006 =**

**115**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Mar-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
                -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
                -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECfp2006 =**

**123**

**SPECfp\_base2006 =**

**115**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Mar-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Peak Optimization Flags (Continued)

465.tonto (continued):

-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Apr 5 14:55:08 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 April 2016.