



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECint®2006 = 64.6

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECint_base2006 = 62.2

CPU2006 license: 9050


Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

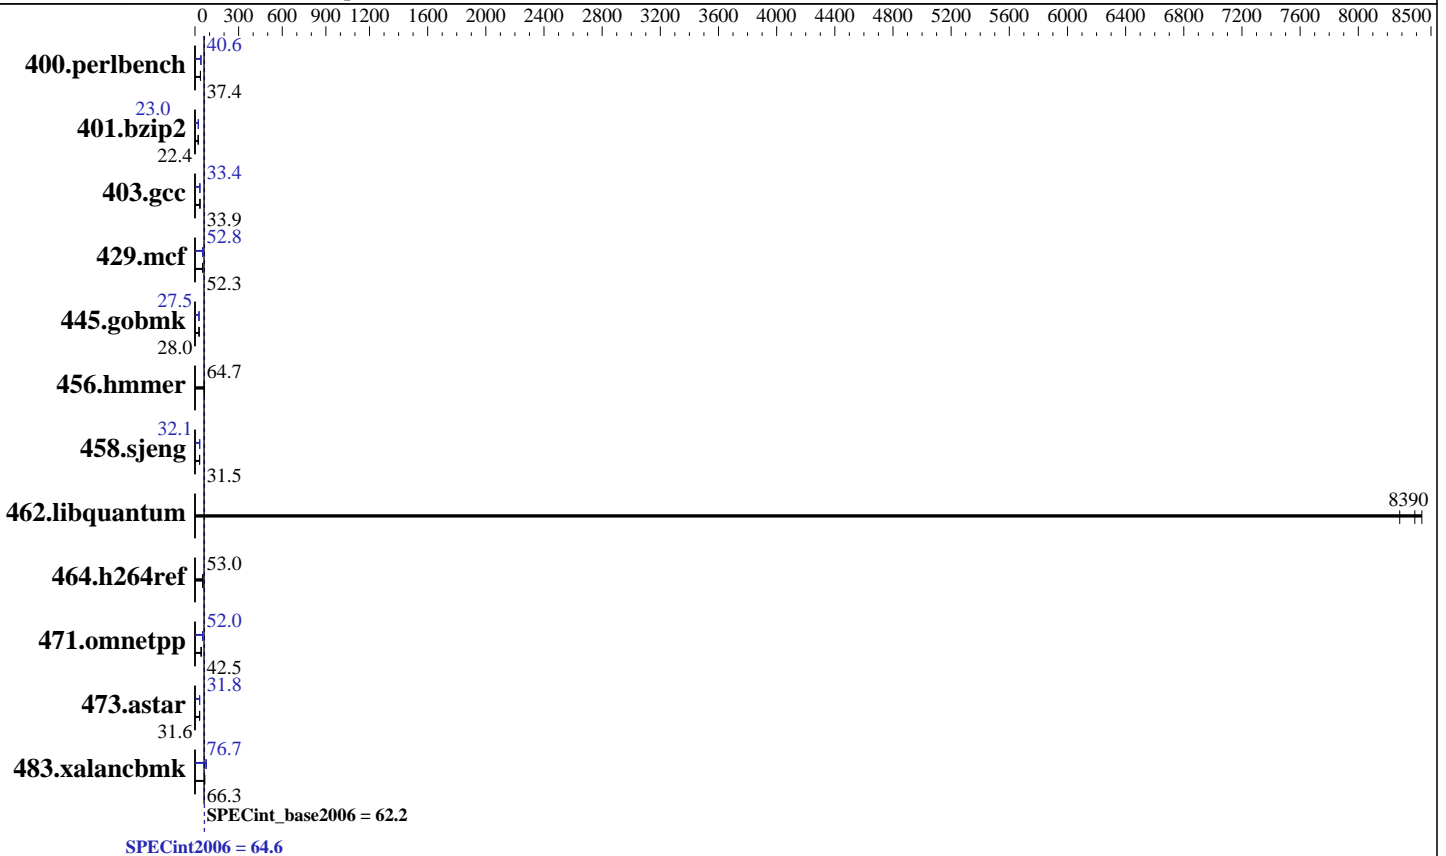

Hardware

CPU Name: Intel Xeon E7-8890 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 1 x 480 GB SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECint2006 = 64.6

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECint_base2006 = 62.2

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	261	37.4	<u>261</u>	<u>37.4</u>	260	37.5	241	40.6	241	40.5	<u>241</u>	<u>40.6</u>
401.bzip2	431	22.4	431	22.4	<u>431</u>	<u>22.4</u>	421	22.9	420	23.0	<u>420</u>	<u>23.0</u>
403.gcc	237	33.9	238	33.8	<u>237</u>	<u>33.9</u>	242	33.3	239	33.6	<u>241</u>	<u>33.4</u>
429.mcf	174	52.3	<u>174</u>	<u>52.3</u>	175	52.2	172	52.9	173	52.8	<u>173</u>	<u>52.8</u>
445.gobmk	376	27.9	375	28.0	<u>375</u>	<u>28.0</u>	381	27.5	<u>381</u>	<u>27.5</u>	381	27.5
456.hammer	144	64.7	<u>144</u>	<u>64.7</u>	144	64.8	144	64.7	<u>144</u>	<u>64.7</u>	144	64.8
458.sjeng	384	31.5	<u>384</u>	<u>31.5</u>	384	31.5	378	32.0	<u>377</u>	<u>32.1</u>	377	32.1
462.libquantum	2.50	8280	2.46	8440	<u>2.47</u>	<u>8390</u>	2.50	8280	2.46	8440	<u>2.47</u>	<u>8390</u>
464.h264ref	<u>417</u>	<u>53.0</u>	419	52.8	417	53.1	<u>417</u>	<u>53.0</u>	419	52.8	417	53.1
471.omnetpp	146	42.7	<u>147</u>	<u>42.5</u>	147	42.5	<u>120</u>	<u>52.0</u>	120	52.0	121	51.8
473.astar	<u>222</u>	<u>31.6</u>	224	31.3	221	31.7	221	31.8	222	31.6	<u>221</u>	<u>31.8</u>
483.xalancbmk	104	66.3	<u>104</u>	<u>66.3</u>	104	66.2	89.8	76.8	<u>90.0</u>	<u>76.7</u>	90.8	76.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/speccpu-auto-install/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Tue Mar 8 13:12:11 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
 4 "physical id"s (chips)
 144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECint2006 = 64.6

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECint_base2006 = 62.2

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

Platform Notes (Continued)

```
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal:      1056507344 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 4 17:10 last=5
```

```
SPEC is set to: /home/speccpu-auto-install
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       xfs   393G  6.2G  387G   2% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. S4L_3B08 10/15/2015

Memory:
32x NO DIMM NO DIMM
64x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/speccpu-auto-install/libs/32:/home/speccpu-auto-install/libs/64:/home/speccpu-auto-install/sh"

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECint2006 = 64.6

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECint_base2006 = 62.2

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

General Notes (Continued)

OMP_NUM_THREADS = "72"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmarthheap64

Base Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECint2006 = 64.6

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECint_base2006 = 62.2

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

Base Other Flags (Continued)

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECint2006 = 64.6

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECint_base2006 = 62.2

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECint2006 = 64.6

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECint_base2006 = 62.2

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 5 14:55:35 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 April 2016.