



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

DX20a-X (Intel Xeon D-1527)

SPECint®2006 = 46.9

SPECint_base2006 = 45.3

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

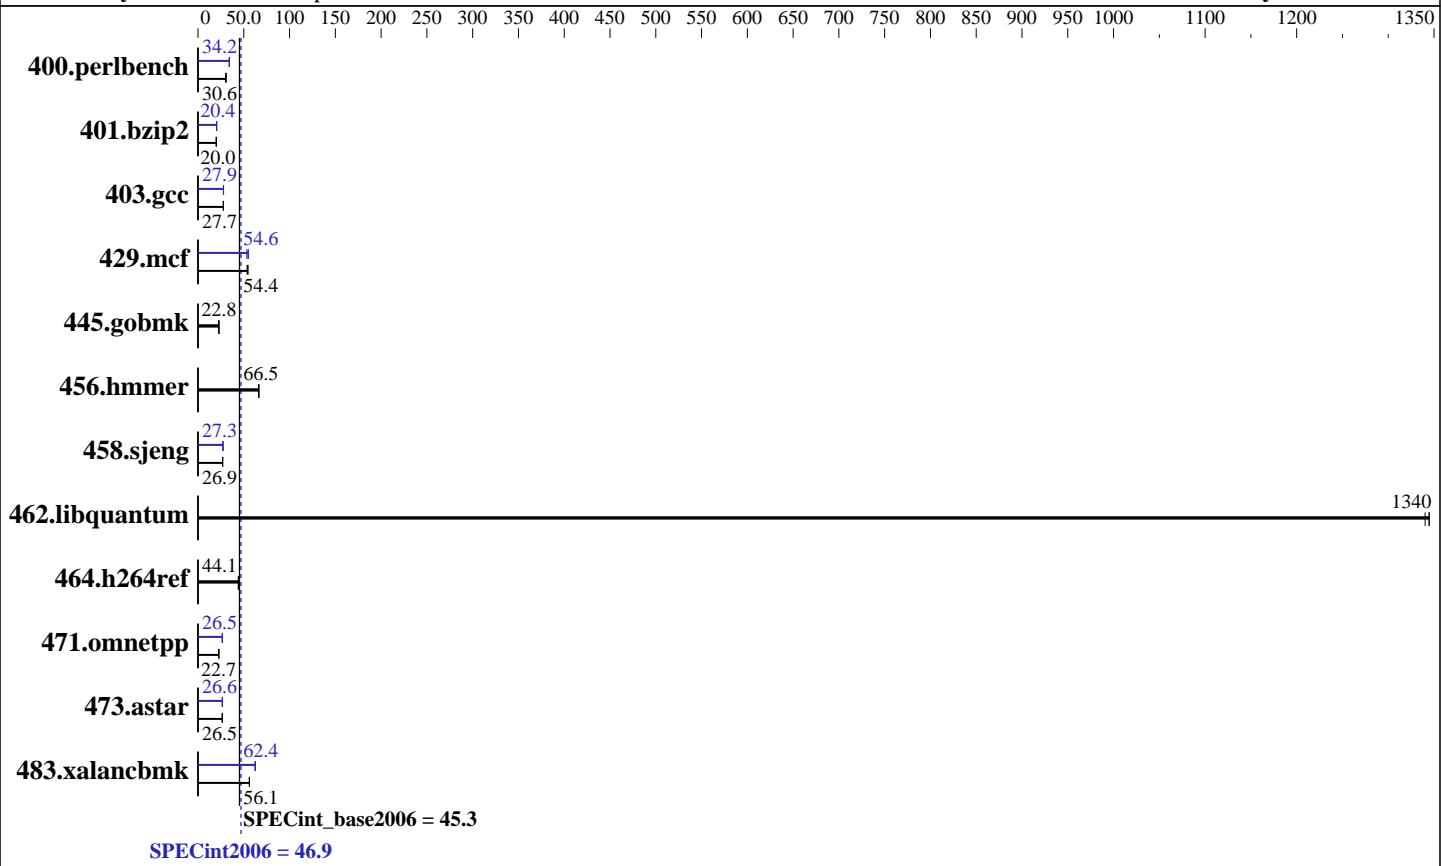

Hardware

CPU Name: Intel Xeon D-1527
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-T)
 Disk Subsystem: 1 x 512 GB SATA, SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Compiler: Kernel 3.10.0-327.el7.x86_64
 Auto Parallel: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

DX20a-X (Intel Xeon D-1527)

SPECint2006 = 46.9

SPECint_base2006 = 45.3

CPU2006 license: 9006

Test date: Mar-2016

Test sponsor: NEC Corporation

Hardware Availability: Mar-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	319	30.6	<u>319</u>	<u>30.6</u>	322	30.3	<u>286</u>	<u>34.2</u>	<u>286</u>	<u>34.2</u>	285	34.2
401.bzip2	483	20.0	482	20.0	<u>483</u>	<u>20.0</u>	<u>474</u>	<u>20.4</u>	474	20.3	<u>474</u>	<u>20.4</u>
403.gcc	290	27.7	<u>291</u>	<u>27.7</u>	291	27.7	<u>290</u>	<u>27.7</u>	<u>289</u>	<u>27.9</u>	289	27.9
429.mcf	<u>168</u>	<u>54.4</u>	167	54.5	170	53.6	<u>167</u>	<u>54.6</u>	166	55.0	171	53.3
445.gobmk	460	22.8	<u>459</u>	<u>22.8</u>	459	22.8	<u>460</u>	<u>22.8</u>	<u>459</u>	<u>22.8</u>	459	22.8
456.hammer	<u>140</u>	<u>66.5</u>	140	66.5	141	66.3	<u>140</u>	<u>66.5</u>	140	66.5	141	66.3
458.sjeng	449	26.9	<u>449</u>	<u>26.9</u>	450	26.9	<u>443</u>	<u>27.3</u>	443	27.3	443	27.3
462.libquantum	<u>15.4</u>	<u>1340</u>	15.5	1340	15.4	1340	<u>15.4</u>	<u>1340</u>	15.5	1340	15.4	1340
464.h264ref	<u>501</u>	<u>44.1</u>	502	44.1	501	44.2	<u>501</u>	<u>44.1</u>	502	44.1	501	44.2
471.omnetpp	276	22.7	275	22.7	<u>276</u>	<u>22.7</u>	<u>235</u>	<u>26.6</u>	<u>235</u>	<u>26.5</u>	236	26.5
473.astar	262	26.8	265	26.5	<u>265</u>	<u>26.5</u>	<u>265</u>	<u>26.5</u>	264	26.6	<u>264</u>	<u>26.6</u>
483.xalancbmk	<u>123</u>	<u>56.1</u>	123	56.3	123	56.0	<u>110</u>	<u>62.7</u>	<u>111</u>	<u>62.4</u>	111	62.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Power Management Policy: Custom
Energy Performance: Performance
Patrol Scrub: Disabled
Hyper-Threading: Disabled

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 46.9

DX20a-X (Intel Xeon D-1527)

SPECint_base2006 = 45.3

CPU2006 license: 9006

Test date: Mar-2016

Test sponsor: NEC Corporation

Hardware Availability: Mar-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation DX20a-X (Intel Xeon D-1527)	SPECint2006 =	46.9
	SPECint_base2006 =	45.3
CPU2006 license: 9006	Test date:	Mar-2016
Test sponsor: NEC Corporation	Hardware Availability:	Mar-2016
Tested by: NEC Corporation	Software Availability:	Nov-2015

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

C++ benchmarks (except as noted below):

`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

`473.astar: icpc -m64`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
 401.bzip2: `-DSPEC_CPU_LP64`
 403.gcc: `-DSPEC_CPU_LP64`
 429.mcf: `-DSPEC_CPU_LP64`
 445.gobmk: `-DSPEC_CPU_LP64`
 456.hammer: `-DSPEC_CPU_LP64`
 458.sjeng: `-DSPEC_CPU_LP64`
 462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
 464.h264ref: `-DSPEC_CPU_LP64`
 471.omnetpp: `-D_FILE_OFFSET_BITS=64`
 473.astar: `-DSPEC_CPU_LP64`
 483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`
`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`
`-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch`
`-ansi-alias`
 401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`
`-ipo(pass 2) -O3(pass 2) -no-prec-div`
`-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32`
`-opt-prefetch -ansi-alias`
 403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`
 429.mcf: `-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel`
`-opt-prefetch -auto-p32`
 445.gobmk: `basepeak = yes`
 456.hammer: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation DX20a-X (Intel Xeon D-1527)	SPECint2006 = 46.9 SPECint_base2006 = 45.3
CPU2006 license: 9006	Test date: Mar-2016
Test sponsor: NEC Corporation	Hardware Availability: Mar-2016
Tested by: NEC Corporation	Software Availability: Nov-2015

Peak Optimization Flags (Continued)

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-DX-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-DX-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 30 13:13:47 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2016.