



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M2, Intel Xeon E5-2609 v4, 1.70 GHz

SPECfp®_rate2006 = 452

SPECfp_rate_base2006 = 442

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

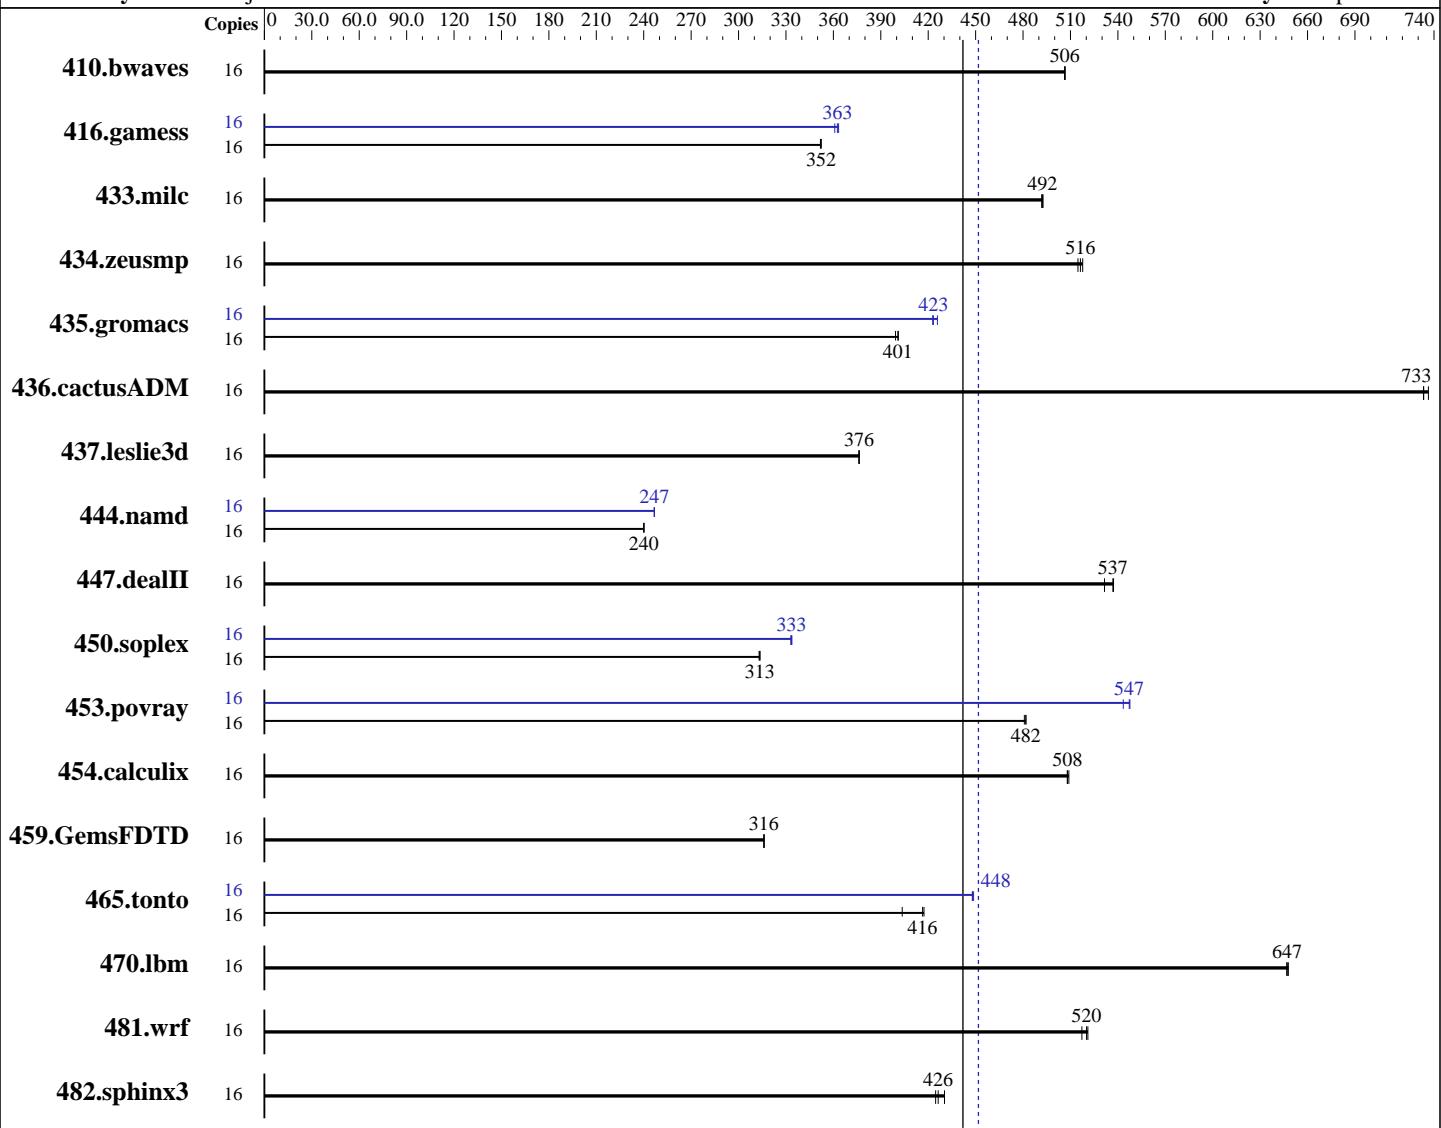

SPECfp_rate_base2006 = 442

SPECfp_rate2006 = 452

Hardware

CPU Name: Intel Xeon E5-2609 v4
 CPU Characteristics:
 CPU MHz:
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Operating System:

SUSE Linux Enterprise Server 12 SP1 (x86_64)

Kernel 3.12.49-11-default

Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux

Auto Parallel:

No

File System:

xfs

System State:

Run level 3 (multi-user)

Software

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M2, Intel Xeon E5-2609 v4, 1.70 GHz

SPECfp_rate2006 = 452

SPECfp_rate_base2006 = 442

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)
Disk Subsystem:	1 x SATA, 1000 GB, 7200 RPM
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	429	506	429	507	429	506	16	429	506	429	507	429	506		
416.gamess	16	889	352	890	352	889	352	16	862	363	864	363	868	361		
433.milc	16	299	492	298	492	298	493	16	299	492	298	492	298	493		
434.zeusmp	16	282	516	281	518	283	515	16	282	516	281	518	283	515		
435.gromacs	16	286	399	285	401	285	401	16	270	423	268	426	270	423		
436.cactusADM	16	260	736	261	733	261	733	16	260	736	261	733	261	733		
437.leslie3d	16	400	376	400	376	400	376	16	400	376	400	376	400	376		
444.namd	16	534	240	534	240	535	240	16	520	247	520	247	520	247		
447.dealII	16	341	537	344	532	341	537	16	341	537	344	532	341	537		
450.soplex	16	426	313	426	314	426	313	16	401	333	400	333	400	334		
453.povray	16	177	482	177	481	177	482	16	157	543	155	548	156	547		
454.calculix	16	260	508	260	508	259	509	16	260	508	260	508	259	509		
459.GemsFDTD	16	537	316	537	316	537	316	16	537	316	537	316	537	316		
465.tonto	16	390	404	377	417	378	416	16	351	448	351	448	351	449		
470.lbm	16	339	648	340	647	340	647	16	339	648	340	647	340	647		
481.wrf	16	343	521	346	517	344	520	16	343	521	346	517	344	520		
482.sphinx3	16	731	426	734	425	725	430	16	731	426	734	425	725	430		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M2, Intel Xeon E5-2609 v4, 1.70 GHz

SPECfp_rate2006 = 452

SPECfp_rate_base2006 = 442

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

Platform Notes

BIOS configuration:
Energy Performance = Performance
Utilization Profile = Unbalanced
QPI snoop mode: Home Directory Snoop with OSB
COD Enable = Disabled, Early Snoop = Disabled, Home Snoop Dir OSB = Enabled
CPU C1E Support = Disabled
Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on RX2530M2 Thu May 5 04:54:35 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 v4 @ 1.70GHz
2 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal: 264519744 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M2, Intel Xeon E5-2609 v4, 1.70 GHz

SPECfp_rate2006 = 452

SPECfp_rate_base2006 = 442

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

Platform Notes (Continued)

```
uname -a:  
Linux RX2530M2 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 4 19:25 last=5
```

```
SPEC is set to: /home/SPECcpu2006  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/mdl126p1   xfs   391G   18G  373G   5%  /home
```

Additional information from dmidecode:

```
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.6.0 for D3279-B1x  
03/11/2016
```

Memory:

```
16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at  
1866 MHz  
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M2, Intel Xeon E5-2609 v4, 1.70 GHz

SPECfp_rate2006 = 452

SPECfp_rate_base2006 = 442

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M2, Intel Xeon E5-2609 v4, 1.70 GHz

SPECfp_rate2006 = 452

SPECfp_rate_base2006 = 442

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M2, Intel Xeon E5-2609 v4, 1.70 GHz

SPECfp_rate2006 = 452

SPECfp_rate_base2006 = 442

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M2, Intel Xeon E5-2609 v4, 1.70 GHz

SPECfp_rate2006 = 452

SPECfp_rate_base2006 = 442

CPU2006 license: 19

Test date: May-2016

Test sponsor: Fujitsu

Hardware Availability: Apr-2016

Tested by: Fujitsu

Software Availability: Sep-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 1 19:10:24 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 June 2016.