



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp[®]_rate2006 = 688

SPECfp_rate_base2006 = 671

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

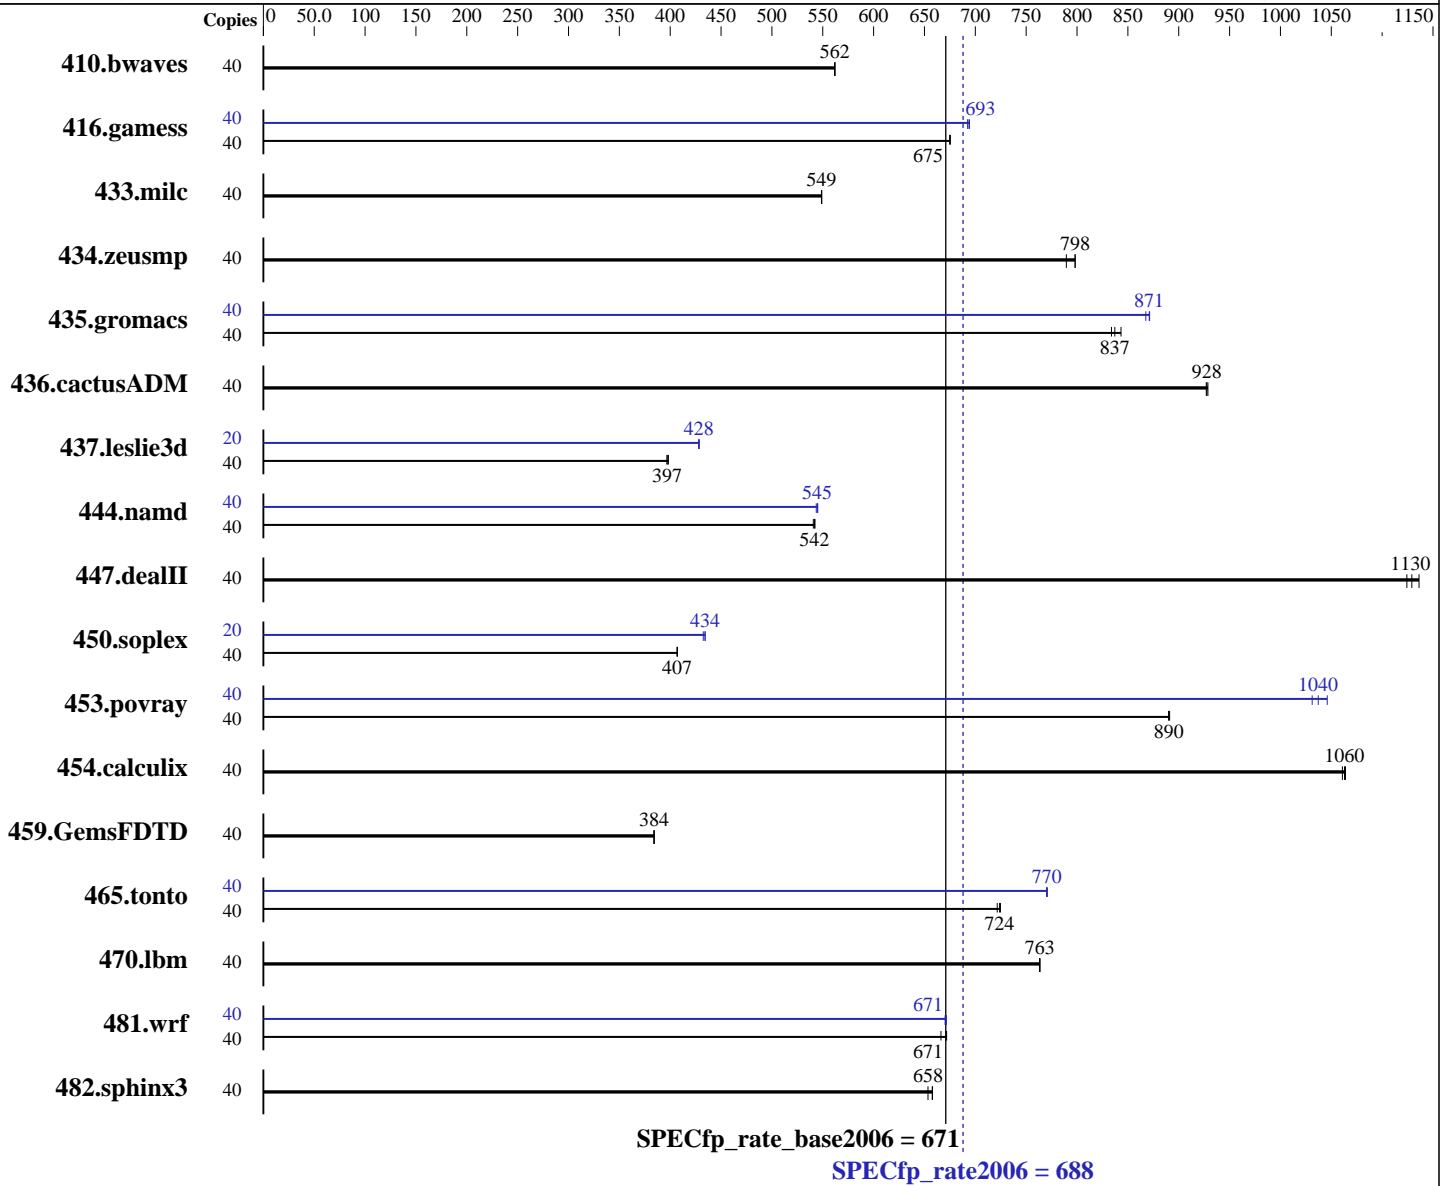

Hardware

CPU Name: Intel Xeon E5-2630 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2, (Maipo)
 Kernel 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp_rate2006 = 688

SPECfp_rate_base2006 = 671

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	968	562	967	562	967	562	40	968	562	967	562	967	562
416.gamess	40	1160	675	1160	675	1161	675	40	1131	693	1128	694	1130	693
433.milc	40	669	549	669	549	669	549	40	669	549	669	549	669	549
434.zeusmp	40	456	798	461	789	456	798	40	456	798	461	789	456	798
435.gromacs	40	341	837	339	843	342	834	40	329	868	328	871	328	871
436.cactusADM	40	516	927	515	928	515	929	40	516	927	515	928	515	929
437.leslie3d	40	947	397	944	398	947	397	20	439	429	439	428	439	428
444.namd	40	592	542	593	541	592	542	40	590	544	589	545	589	545
447.dealII	40	403	1140	405	1130	407	1120	40	403	1140	405	1130	407	1120
450.soplex	40	820	407	820	407	820	407	20	384	434	386	433	384	434
453.povray	40	239	890	239	891	239	890	40	205	1040	203	1050	206	1030
454.calculix	40	311	1060	310	1060	310	1060	40	311	1060	310	1060	310	1060
459.GemsFDTD	40	1105	384	1105	384	1105	384	40	1105	384	1105	384	1105	384
465.tonto	40	546	722	543	725	544	724	40	511	771	511	770	511	770
470.lbm	40	720	764	720	763	720	763	40	720	764	720	763	720	763
481.wrf	40	671	666	666	671	665	672	40	666	671	667	670	665	671
482.sphinx3	40	1185	658	1185	658	1193	653	40	1185	658	1185	658	1193	653

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp_rate2006 = 688

SPECfp_rate_base2006 = 671

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Platform Notes

BIOS Configuration:

Power Profile set to Maximum Performance
QPI Snoop Configuration set to Cluster on Die
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on Pilot-XL420-G9 Fri May 20 18:10:09 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2630 v4 @ 2.20GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 10
  siblings       : 20
  physical 0:    cores 0 1 2 3 4 8 9 10 11 12
  physical 1:    cores 0 1 2 3 4 8 9 10 11 12
cache size      : 25600 KB
```

From /proc/meminfo

```
MemTotal:        263890016 kB
HugePages_Total: 0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

uname -a:

```
Linux Pilot-XL420-G9 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp_rate2006 = 688

SPECfp_rate_base2006 = 671

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Platform Notes (Continued)

run-level 3 May 20 17:57

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	361G	66G	277G	20%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U19 03/10/2016

Memory:

16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp_rate2006 = 688

SPECfp_rate_base2006 = 671

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-fp-model fast=2 -auto-ilp32 -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint

```

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp_rate2006 = 688

SPECfp_rate_base2006 = 671

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -static(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -static(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp_rate2006 = 688

SPECfp_rate_base2006 = 671

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

450.soplex (continued):

-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -static(pass 2)

-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4

-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)

-unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)

-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)

-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -static(pass 2)

-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)

-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp_rate2006 = 688

SPECfp_rate_base2006 = 671

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 14:06:41 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 June 2016.