



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 1170**

PowerEdge R930 (Intel Xeon E7-4820 v4, 2.00 GHz)

**SPECfp\_rate\_base2006 = 1150**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

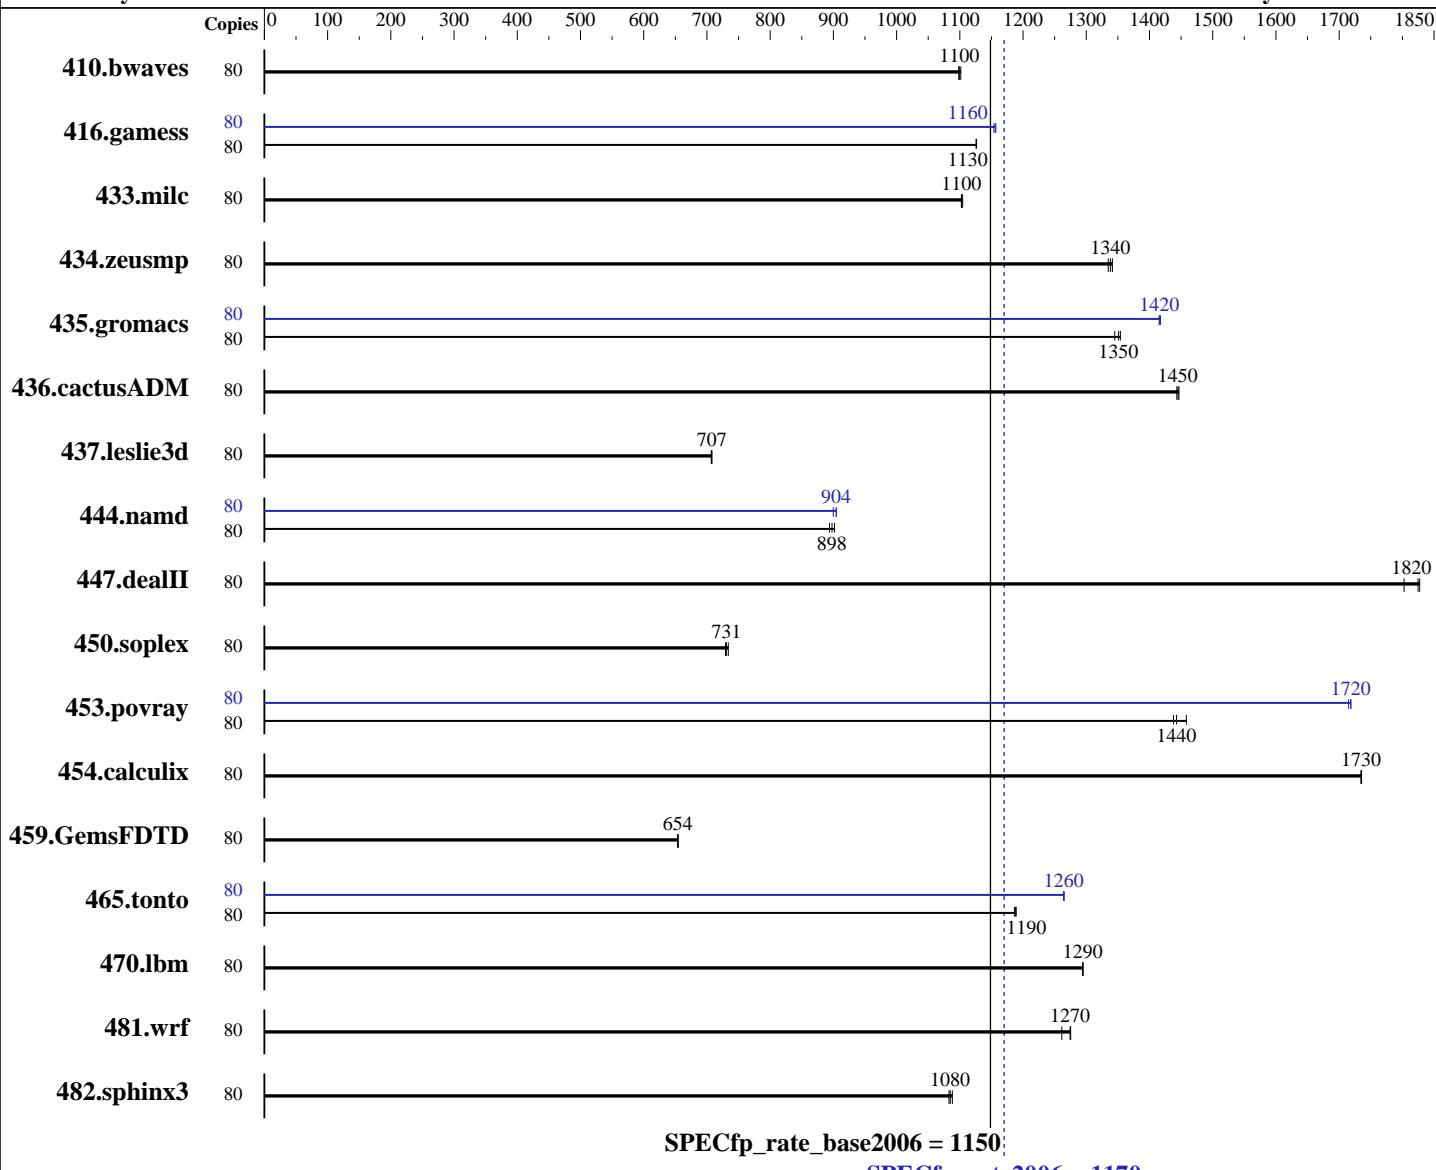

**SPECfp\_rate\_base2006 = 1150**

**SPECfp\_rate2006 = 1170**

## Hardware

CPU Name: Intel Xeon E7-4820 v4  
 CPU Characteristics:  
 CPU MHz:  
 FPU:  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1170**

PowerEdge R930 (Intel Xeon E7-4820 v4, 2.00 GHz)

**SPECfp\_rate\_base2006 = 1150**

**CPU2006 license:** 55

**Test date:** Jun-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Mar-2016

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)  
 Disk Subsystem: 1 x 480 GB SAS SSD  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	990	1100	987	1100	<b><u>989</u></b>	<b><u>1100</u></b>	80	990	1100	987	1100	<b><u>989</u></b>	<b><u>1100</u></b>
416.gamess	80	1391	1130	<b><u>1391</u></b>	<b><u>1130</u></b>	1391	1130	80	<b><u>1355</u></b>	<b><u>1160</u></b>	1354	1160	<b><u>1357</u></b>	<b><u>1150</u></b>
433.milc	80	<b><u>666</u></b>	<b><u>1100</u></b>	665	1100	666	1100	80	<b><u>666</u></b>	<b><u>1100</u></b>	665	1100	<b><u>666</u></b>	<b><u>1100</u></b>
434.zeusmp	80	545	1330	<b><u>544</u></b>	<b><u>1340</u></b>	543	1340	80	545	1330	<b><u>544</u></b>	<b><u>1340</u></b>	543	1340
435.gromacs	80	<b><u>423</u></b>	<b><u>1350</u></b>	422	1350	425	1350	80	<b><u>403</u></b>	<b><u>1420</u></b>	404	1420	403	1420
436.cactusADM	80	<b><u>662</u></b>	<b><u>1450</u></b>	662	1440	661	1450	80	<b><u>662</u></b>	<b><u>1450</u></b>	662	1440	<b><u>661</u></b>	<b><u>1450</u></b>
437.leslie3d	80	<b><u>1063</u></b>	<b><u>707</u></b>	1062	708	1064	707	80	<b><u>1063</u></b>	<b><u>707</u></b>	1062	708	1064	<b><u>707</u></b>
444.namd	80	712	902	718	894	<b><u>715</u></b>	<b><u>898</u></b>	80	713	900	709	905	<b><u>709</u></b>	<b><u>904</u></b>
447.dealII	80	508	1800	501	1830	<b><u>502</u></b>	<b><u>1820</u></b>	80	508	1800	501	1830	<b><u>502</u></b>	<b><u>1820</u></b>
450.soplex	80	<b><u>913</u></b>	<b><u>731</u></b>	915	729	909	734	80	<b><u>913</u></b>	<b><u>731</u></b>	915	729	909	734
453.povray	80	<b><u>295</u></b>	<b><u>1440</u></b>	292	1460	296	1440	80	248	<b><u>1710</u></b>	248	1720	<b><u>248</u></b>	<b><u>1720</u></b>
454.calculix	80	<b><u>380</u></b>	<b><u>1730</u></b>	380	1740	380	1730	80	<b><u>380</u></b>	<b><u>1730</u></b>	380	1740	380	1730
459.GemsFDTD	80	1297	654	<b><u>1297</u></b>	<b><u>654</u></b>	1298	654	80	1297	654	<b><u>1297</u></b>	<b><u>654</u></b>	1298	654
465.tonto	80	664	1190	662	1190	<b><u>663</u></b>	<b><u>1190</u></b>	80	622	1270	623	1260	<b><u>623</u></b>	<b><u>1260</u></b>
470.lbm	80	849	1290	849	1290	<b><u>849</u></b>	<b><u>1290</u></b>	80	849	1290	849	1290	<b><u>849</u></b>	<b><u>1290</u></b>
481.wrf	80	<b><u>701</u></b>	<b><u>1270</u></b>	708	1260	701	1280	80	<b><u>701</u></b>	<b><u>1270</u></b>	708	1260	701	1280
482.sphinx3	80	1440	1080	1433	1090	<b><u>1437</u></b>	<b><u>1080</u></b>	80	1440	1080	1433	1090	<b><u>1437</u></b>	<b><u>1080</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop mode set to Home Snoop

Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1170**

PowerEdge R930 (Intel Xeon E7-4820 v4, 2.00 GHz)

**SPECfp\_rate\_base2006 = 1150**

**CPU2006 license:** 55

**Test date:** Jun-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Mar-2016

## Platform Notes (Continued)

```
System Profile set to custom
CPU Performance set to Maximum Performance
C States set to disabled
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Sysinfo program /root/ic16.0_Sept12_2015/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on bdx-perf01 Wed Jun  8 14:26:05 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-4820 v4 @ 2.00GHz
        4 "physical id"s (chips)
        80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings   : 20
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
    physical 2: cores 0 1 2 3 4 8 9 10 11 12
    physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      529322532 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP1"
  VERSION_ID="12.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
  ID="sles"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1170**

PowerEdge R930 (Intel Xeon E7-4820 v4, 2.00 GHz)

**SPECfp\_rate\_base2006 = 1150**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jun-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Mar-2016

## Platform Notes (Continued)

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

```
Linux bdx-perf01 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 8 14:21

SPEC is set to: /root/ic16.0\_Sept12\_2015

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	368G	9.1G	359G	3%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.0.1 04/20/2016

Memory:

```
32x 00AD00B300AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1333
MHz
64x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/ic16.0\_Sept12\_2015/libs/32:/root/ic16.0\_Sept12\_2015/libs/64:/root/ic16.0\_Sept12\_2015/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1170**

PowerEdge R930 (Intel Xeon E7-4820 v4, 2.00 GHz)

**SPECfp\_rate\_base2006 = 1150**

CPU2006 license: 55

Test date: Jun-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1170**

PowerEdge R930 (Intel Xeon E7-4820 v4, 2.00 GHz)

**SPECfp\_rate\_base2006 = 1150**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jun-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Mar-2016

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1170**

PowerEdge R930 (Intel Xeon E7-4820 v4, 2.00 GHz)

**SPECfp\_rate\_base2006 = 1150**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jun-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Mar-2016

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 28 17:29:35 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 June 2016.