



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 1960

Compute Blade 520X (Intel Xeon E7-8893 v4)

SPECint_rate_base2006 = 1850

CPU2006 license: 35


Test date: Sep-2016

Test sponsor: HITACHI

Hardware Availability: Jun-2016

Tested by: HITACHI

Software Availability: Mar-2016

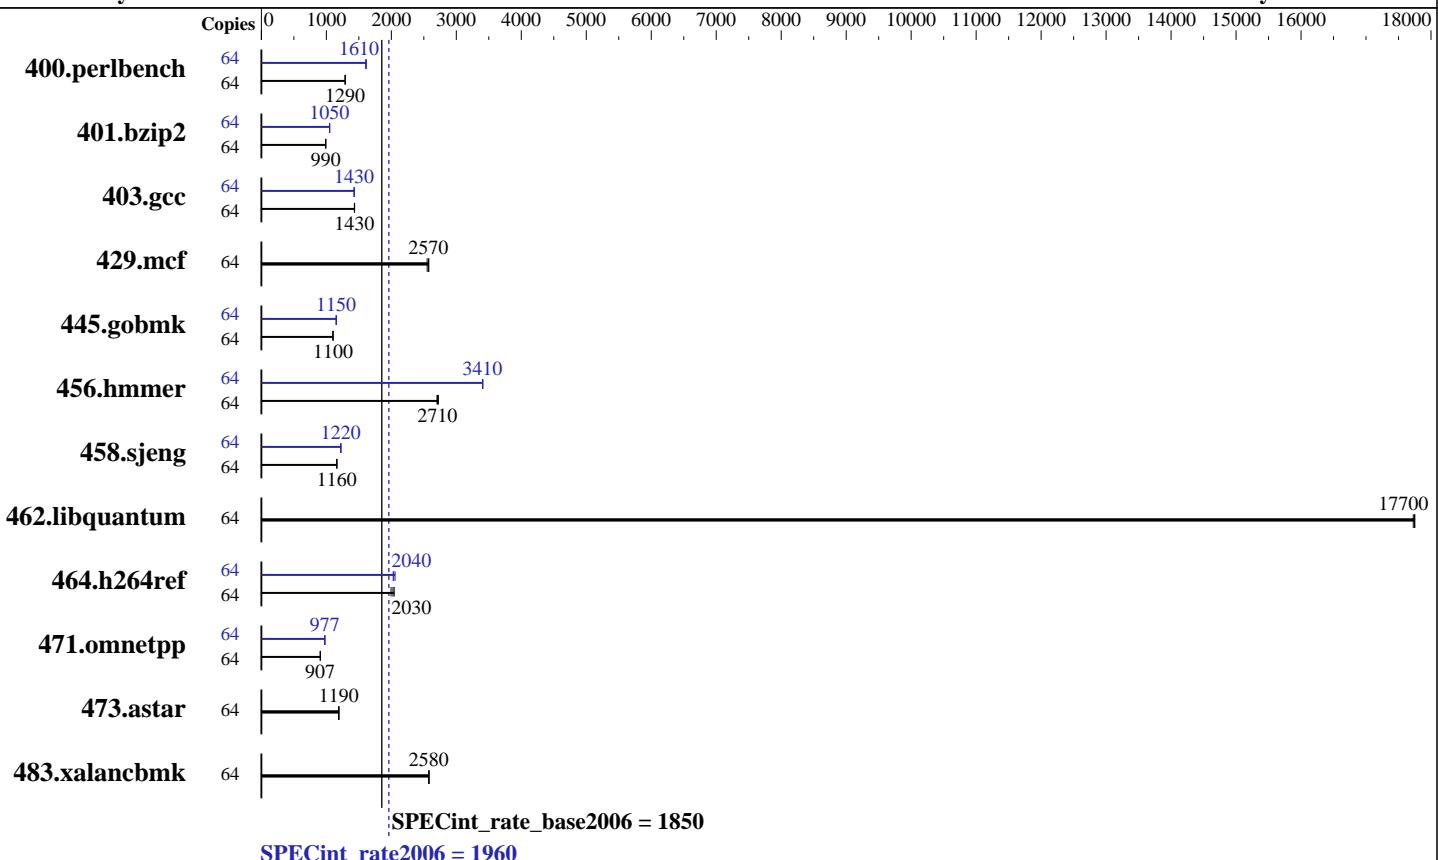

Hardware

CPU Name:	Intel Xeon E7-8893 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	32 cores, 8 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,8 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	60 MB I+D on chip per chip
Other Cache:	None
Memory:	3 TB (192 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	2 x 600 GB SAS, 15000 RPM, RAID1
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8893 v4)

SPECint_rate2006 = 1960

CPU2006 license: 35

Test date: Sep-2016

Test sponsor: HITACHI

Hardware Availability: Jun-2016

Tested by: HITACHI

Software Availability: Mar-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	484	1290	485	1290	485	1290	64	388	1610	389	1610	388	1610
401.bzip2	64	623	991	624	989	624	990	64	589	1050	587	1050	588	1050
403.gcc	64	359	1430	359	1430	360	1430	64	361	1430	361	1430	360	1430
429.mcf	64	229	2550	227	2570	227	2580	64	229	2550	227	2570	227	2580
445.gobmk	64	609	1100	610	1100	608	1100	64	583	1150	583	1150	583	1150
456.hammer	64	220	2710	219	2720	221	2700	64	175	3410	175	3400	175	3410
458.sjeng	64	667	1160	666	1160	668	1160	64	633	1220	633	1220	634	1220
462.libquantum	64	74.8	17700	74.7	17800	74.7	17700	64	74.8	17700	74.7	17800	74.7	17700
464.h264ref	64	693	2040	710	2000	699	2030	64	698	2030	696	2040	688	2060
471.omnetpp	64	441	908	441	906	441	907	64	409	977	410	976	409	977
473.astar	64	378	1190	376	1190	377	1190	64	378	1190	376	1190	377	1190
483.xalancbmk	64	171	2580	171	2580	171	2580	64	171	2580	171	2580	171	2580

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

```
Memory Power Management = Automatic
Active Energy Manager = "Capping Disabled"
Platform Controlled Type = "Maximum Performance"
C1 Enhanced Mode = Disable
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date::: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on rhel7264 Fri Sep 16 09:19:32 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8893 v4 @ 3.20GHz
  8 "physical id"s (chips)
  64 "processors"
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8893 v4)

SPECint_rate2006 = 1960

CPU2006 license: 35

Test date: Sep-2016

Test sponsor: HITACHI

Hardware Availability: Jun-2016

Tested by: HITACHI

Software Availability: Mar-2016

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings   : 8
physical 0: cores 12 13 25 26
physical 1: cores 12 13 25 26
physical 2: cores 12 13 25 26
physical 3: cores 12 13 25 26
physical 4: cores 12 13 25 26
physical 5: cores 12 13 25 26
physical 6: cores 12 13 25 26
physical 7: cores 12 13 25 26
cache size : 61440 KB
```

```
From /proc/meminfo
MemTotal:      3169800748 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.2 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.2"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux rhel7264 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 16 09:14
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  504G  12G  493G  3% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HITACHI 11-04 08/29/2016

Memory:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8893 v4)

SPECint_rate2006 = 1960

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Sep-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Platform Notes (Continued)

```
76x 0x0000 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
2x 0x0001 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
6x 0x0003 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
2x 0x0004 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
2x 0x0200 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
2x 0x0201 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
2x 0x0603 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
2x 0x0A0D M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
2x 0x5C00 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
96x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Hitachi Compute Blade 520X and BladeSymphony BS2500 are electronically equivalent. The results have been measured on a Hitachi Compute Blade 520X.

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hammer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8893 v4)

SPECint_rate2006 = 1960

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Sep-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Base Portability Flags (Continued)

```
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX  
464.h264ref: -D_FILE_OFFSET_BITS=64  
471.omnetpp: -D_FILE_OFFSET_BITS=64  
473.astar: -D_FILE_OFFSET_BITS=64  
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8893 v4)

SPECint_rate2006 = 1960

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Sep-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Peak Portability Flags (Continued)

```
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hammer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
  -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
  -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
  -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
  -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
  -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
  -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
  -opt-mem-layout-trans=3

456.hammer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
  -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
  -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
  -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
  -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
  -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
  -ansi-alias
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8893 v4)

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

SPECint_rate2006 = 1960

SPECint_rate_base2006 = 1850

Test date: Sep-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
             -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.6.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Oct 4 14:49:59 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 October 2016.