



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint®2006 = 60.7

Lenovo ThinkServer RD452X
(Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_base2006 = 57.1

CPU2006 license: 9017


Test date: Sep-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2013

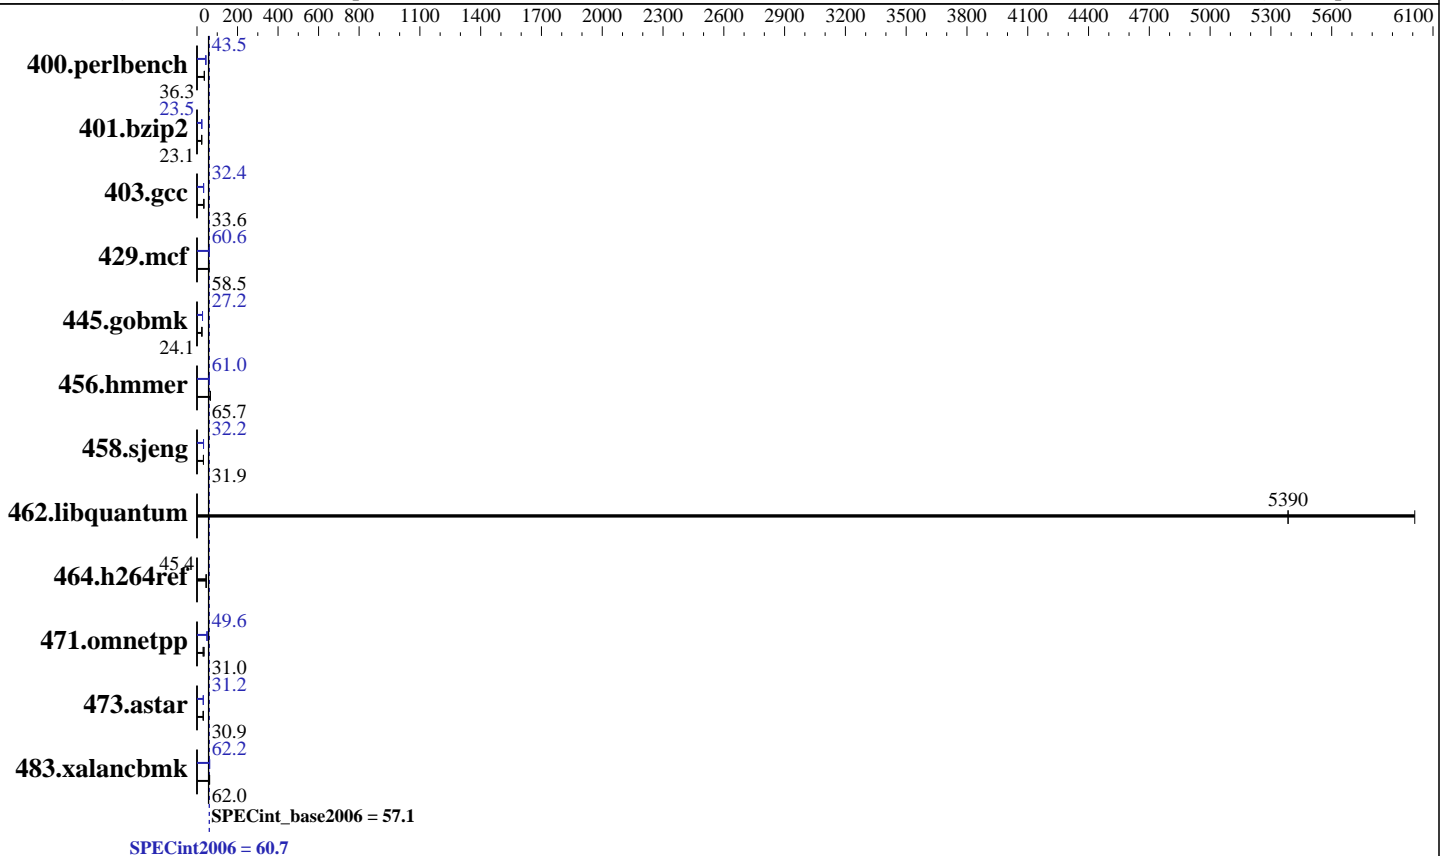

Hardware

CPU Name: Intel Xeon E5-2680 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
 Disk Subsystem: 1 x 480 GB SATA SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.7 (Santiago)
 2.6.32-573.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = **60.7**

Lenovo ThinkServer RD452X
(Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_base2006 = **57.1**

CPU2006 license: 9017

Test date: Sep-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	269	36.3	270	36.1	268	36.4	225	43.4	224	43.6	225	43.5
401.bzip2	418	23.1	417	23.1	417	23.1	411	23.5	411	23.5	411	23.5
403.gcc	239	33.7	239	33.6	239	33.6	248	32.4	250	32.2	245	32.8
429.mcf	156	58.5	155	58.7	160	57.1	151	60.6	151	60.5	148	61.6
445.gobmk	436	24.1	436	24.1	437	24.0	386	27.2	385	27.2	385	27.2
456.hammer	142	65.9	142	65.7	142	65.6	153	61.0	153	61.1	155	60.2
458.sjeng	380	31.9	380	31.9	380	31.8	376	32.2	376	32.2	376	32.2
462.libquantum	3.85	5390	3.45	6010	3.85	5380	3.85	5390	3.45	6010	3.85	5380
464.h264ref	487	45.4	487	45.4	490	45.2	487	45.4	487	45.4	490	45.2
471.omnetpp	202	31.0	205	30.5	176	35.4	126	49.4	126	49.6	125	49.9
473.astar	228	30.7	227	31.0	227	30.9	225	31.2	225	31.1	225	31.2
483.xalancbmk	111	62.0	111	62.1	112	61.8	111	62.3	111	62.2	111	62.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled

Cluster on Die set to Disabled

Early Snoop set to Enabled

Sysinfo program /cpu2006/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on localhost.localdomain Sun Sep 18 09:51:00 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2680 v3 @ 2.50GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 60.7

Lenovo ThinkServer RD452X
(Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_base2006 = 57.1

CPU2006 license: 9017

Test date: Sep-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2013

Platform Notes (Continued)

```

cpu cores : 12
siblings  : 12
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB

```

From /proc/meminfo

```

MemTotal:      264504428 kB
HugePages_Total: 0
Hugepagesize:   2048 kB

```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.7 (Santiago)

From /etc/*release* /etc/*version*

```

redhat-release: Red Hat Enterprise Linux Server release 6.7 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.7 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

uname -a:

```

Linux localhost.localdomain 2.6.32-573.el6.x86_64 #1 SMP Wed Jul 1 18:23:37
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 5 Sep 18 09:49

SPEC is set to: /cpu2006

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        ext4     193G  100G   83G  55% /

```

Additional information from dmidecode:

```

BIOS American Megatrends Inc. A1.11 04/09/2016
Memory:
16x 16 GB
16x Samsung M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
OMP_NUM_THREADS = "24"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 60.7

Lenovo ThinkServer RD452X
(Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_base2006 = 57.1

CPU2006 license: 9017

Test date: Sep-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2013

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmarthheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 60.7

Lenovo ThinkServer RD452X
(Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_base2006 = 57.1

CPU2006 license: 9017

Test date: Sep-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
 401.bzip2: `-DSPEC_CPU_LP64`
 403.gcc: `-DSPEC_CPU_LP64`
 429.mcf: `-DSPEC_CPU_LP64`
 456.hmmer: `-DSPEC_CPU_LP64`
 458.sjeng: `-DSPEC_CPU_LP64`
 462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
 464.h264ref: `-DSPEC_CPU_LP64`
 473.astar: `-DSPEC_CPU_LP64`
 483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 60.7

Lenovo ThinkServer RD452X
(Intel Xeon E5-2680 v3, 2.50 GHz)

SPECint_base2006 = 57.1

CPU2006 license: 9017

Test date: Sep-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 4 14:50:10 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 October 2016.