



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECint<sup>®</sup>\_rate2006 = 1320

### Inspur NF5180M4 (Intel Xeon E5-2680 v4)

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3358


Test date: Nov-2016

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Jan-2016

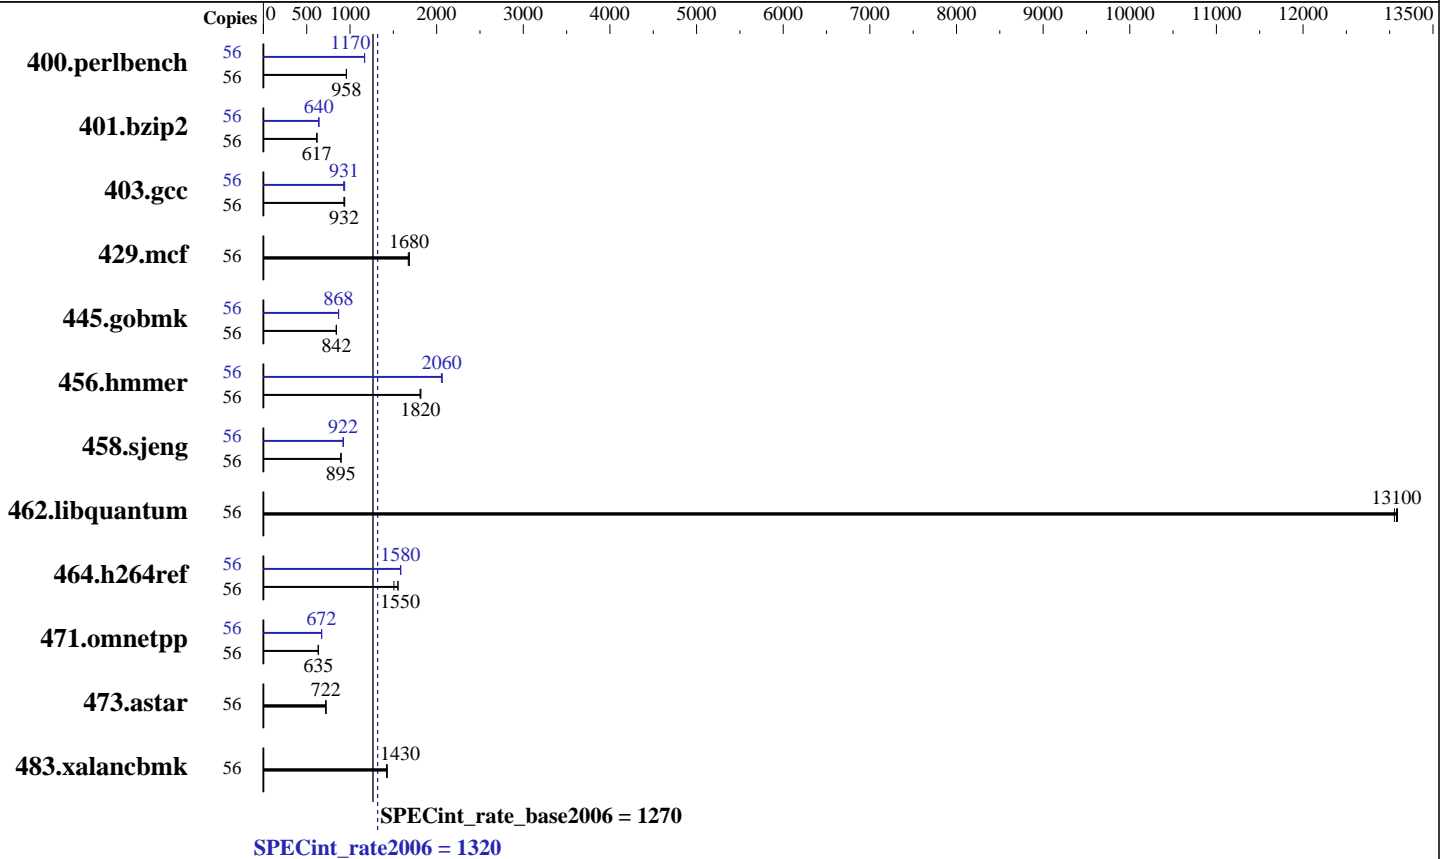

### Hardware

CPU Name: Intel Xeon E5-2680 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2400 MHz)  
 Disk Subsystem: 1 x 450 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Inspur K-UX release 3.0.5 (Inspur) 3.10.4-K\_UX.x86\_64  
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 5  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 1320

Inspur NF5180M4 (Intel Xeon E5-2680 v4)

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3358

Test date: Nov-2016

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Jan-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	<u>571</u>	<u>958</u>	571	958	571	959	56	469	1170	468	1170	<u>468</u>	<u>1170</u>
401.bzip2	56	876	617	<u>875</u>	<u>617</u>	875	618	56	845	640	<u>845</u>	<u>640</u>	845	640
403.gcc	56	484	932	<u>484</u>	<u>932</u>	480	939	56	480	939	486	928	<u>484</u>	<u>931</u>
429.mcf	56	<u>304</u>	<u>1680</u>	303	1680	305	1670	56	<u>304</u>	<u>1680</u>	303	1680	305	1670
445.gobmk	56	697	843	698	842	<u>698</u>	<u>842</u>	56	677	868	<u>677</u>	<u>868</u>	677	868
456.hammer	56	<u>288</u>	<u>1820</u>	289	1810	288	1820	56	253	2060	254	2050	<u>254</u>	<u>2060</u>
458.sjeng	56	757	895	<u>757</u>	<u>895</u>	757	895	56	735	922	735	922	<u>735</u>	<u>922</u>
462.libquantum	56	<u>88.7</u>	<u>13100</u>	88.6	13100	88.9	13100	56	<u>88.7</u>	<u>13100</u>	88.6	13100	88.9	13100
464.h264ref	56	797	1550	<u>798</u>	<u>1550</u>	823	1510	56	783	1580	<u>783</u>	<u>1580</u>	781	1590
471.omnetpp	56	<u>552</u>	<u>635</u>	554	632	550	637	56	521	672	520	672	<u>521</u>	<u>672</u>
473.astar	56	546	720	544	722	<u>545</u>	<u>722</u>	56	546	720	544	722	<u>545</u>	<u>722</u>
483.xalancbmk	56	270	1430	272	1420	<u>271</u>	<u>1430</u>	56	270	1430	272	1420	<u>271</u>	<u>1430</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS and OS configuration:  
SCALING\_GOVERNOR set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
C1E Support set to Disable  
Sysinfo program /home/CPU2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Tue Nov 22 05:32:20 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2680 v4@ 2.40GHz  
2 "physical id"s (chips)  
56 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 1320

Inspur NF5180M4 (Intel Xeon E5-2680 v4)

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3358

Test date: Nov-2016

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Jan-2016

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 14
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

From /proc/meminfo

```
MemTotal:      264027036 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
inspur-release: Inspur K-UX release 3.0.5 (Inspur)
os-release:
NAME="Inspur K-UX"
VERSION="3 (Inspur)"
ID="k-ux"
VERSION_ID="3"
PRETTY_NAME="Inspur K-UX 3 (Inspur)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:k-ux:k-ux:3"
HOME_URL="http://www.inspur.com/"
system-release: Inspur K-UX release 3.0.5 (Inspur)
system-release-cpe: cpe:/o:k-ux:k-ux:3
```

uname -a:

```
Linux localhost.localdomain 3.10.4-K_UX.x86_64 #1 SMP Fri Sep 30 11:06:29 GMT
2016 x86_64 x86_64 x86_64 GNU/Linux
```

SPEC is set to: /home/CPU2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/ik-home xfs  412G   71G  341G  18% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 4.1.8 06/12/2016

Memory:

```
16x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 1320

Inspur NF5180M4 (Intel Xeon E5-2680 v4)

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3358

Test date: Nov-2016

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Jan-2016

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarheap



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 1320

Inspur NF5180M4 (Intel Xeon E5-2680 v4)

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Nov-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 1320

Inspur NF5180M4 (Intel Xeon E5-2680 v4)

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3358

Test date: Nov-2016

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Jan-2016

## Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 1320

Inspur NF5180M4 (Intel Xeon E5-2680 v4)

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Nov-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Dec 15 11:16:12 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 December 2016.