




SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

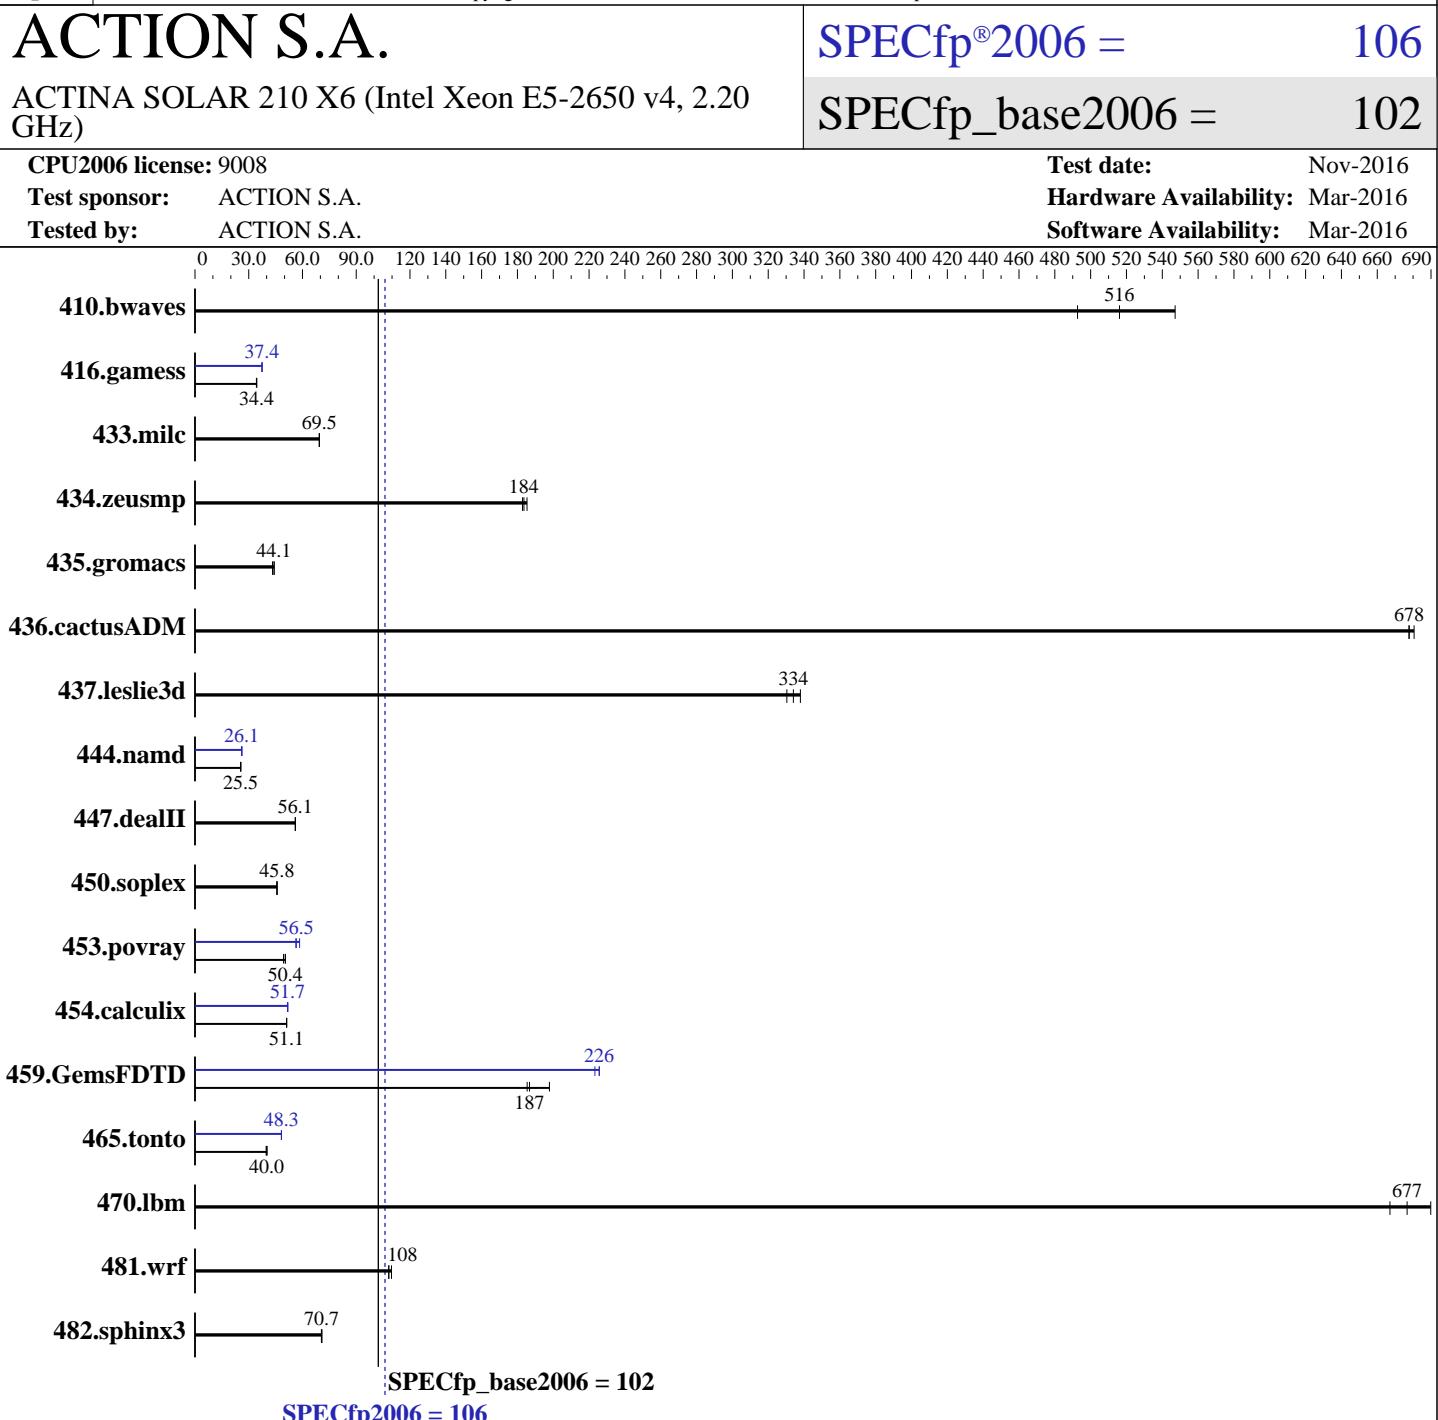

Hardware

CPU Name: Intel Xeon E5-2650 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Compiler: 3.10.0-327.18.2.el7.x86_64
 C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECfp2006 = 106

SPECfp_base2006 = 102

CPU2006 license: 9008

Test date: Nov-2016

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	27.6	493	24.8	547	<u>26.3</u>	<u>516</u>	27.6	493	24.8	547	<u>26.3</u>	<u>516</u>
416.gamess	568	34.4	<u>569</u>	<u>34.4</u>	571	34.3	<u>523</u>	<u>37.4</u>	524	<u>37.4</u>	<u>523</u>	<u>37.4</u>
433.milc	132	69.3	<u>132</u>	<u>69.5</u>	132	69.5	<u>132</u>	<u>69.3</u>	<u>132</u>	<u>69.5</u>	132	69.5
434.zeusmp	<u>49.6</u>	<u>184</u>	49.8	183	49.1	185	<u>49.6</u>	<u>184</u>	49.8	183	49.1	185
435.gromacs	<u>162</u>	<u>44.1</u>	162	44.2	165	43.3	<u>162</u>	<u>44.1</u>	162	44.2	165	43.3
436.cactusADM	17.6	681	17.6	678	<u>17.6</u>	<u>678</u>	17.6	681	17.6	678	<u>17.6</u>	<u>678</u>
437.leslie3d	<u>28.1</u>	<u>334</u>	28.5	330	27.8	338	<u>28.1</u>	<u>334</u>	28.5	330	27.8	338
444.namd	<u>314</u>	<u>25.5</u>	314	25.5	314	25.5	307	26.1	<u>307</u>	<u>26.1</u>	307	26.1
447.dealII	204	56.1	<u>204</u>	<u>56.1</u>	204	56.0	<u>204</u>	<u>56.1</u>	<u>204</u>	<u>56.1</u>	204	56.0
450.soplex	<u>182</u>	<u>45.8</u>	182	45.7	182	45.8	<u>182</u>	<u>45.8</u>	182	<u>45.7</u>	182	45.8
453.povray	108	49.4	105	50.5	<u>106</u>	<u>50.4</u>	94.5	56.3	91.1	58.4	<u>94.1</u>	<u>56.5</u>
454.calculix	161	51.2	161	51.1	<u>161</u>	<u>51.1</u>	160	51.7	<u>160</u>	<u>51.7</u>	159	51.9
459.GemsFDTD	57.2	185	<u>56.8</u>	<u>187</u>	53.6	198	47.5	223	47.0	226	<u>47.0</u>	<u>226</u>
465.tonto	248	39.7	244	40.3	<u>246</u>	<u>40.0</u>	204	48.3	204	48.2	<u>204</u>	<u>48.3</u>
470.lbm	<u>20.3</u>	<u>677</u>	19.9	690	20.6	667	<u>20.3</u>	<u>677</u>	19.9	690	20.6	667
481.wrf	102	110	<u>103</u>	<u>108</u>	103	108	102	110	<u>103</u>	<u>108</u>	103	108
482.sphinx3	<u>276</u>	<u>70.7</u>	275	70.8	276	70.6	<u>276</u>	<u>70.7</u>	<u>275</u>	<u>70.8</u>	276	70.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings:
 Intel(R) Hyper-Threading Tech = Disabled
 Power & Performance = Performance
 Enforce POR = Disabled
 Memory Operating Speed Selection = 2400
 Cluster-on-Die = Disabled
 Set FAN Profile = Performance
 Fan PWM Offset = 0

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp2006 =	106
ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)	SPECfp_base2006 =	102
CPU2006 license: 9008	Test date:	Nov-2016
Test sponsor: ACTION S.A.	Hardware Availability:	Mar-2016
Tested by: ACTION S.A.	Software Availability:	Mar-2016

Platform Notes (Continued)

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on SUT Fri Nov 18 22:28:57 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v4 @ 2.20GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings : 12
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
  cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      263860776 kB
HugePages_Total:       1
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.2 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.2"
  PRETTY_NAME="Red Hat Enterprise Linux"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
os-release.rpmsave:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.0 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.0"
  PRETTY_NAME="Red Hat Enterprise Linux"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECfp2006 = 106

SPECfp_base2006 = 102

CPU2006 license: 9008

Test date: Nov-2016

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Platform Notes (Continued)

run-level 3 Nov 18 16:51

SPEC is set to: /cpu2006.1.2

Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext4 212G 46G 155G 23% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C610.86B.01.01.0019.101220160604 10/12/2016

Memory:

16x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz
8x NO DIMM NO DIMM

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh10.2"

OMP_NUM_THREADS = "24"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp2006 =	106
ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)	SPECfp_base2006 =	102
CPU2006 license: 9008	Test date:	Nov-2016
Test sponsor: ACTION S.A.	Hardware Availability:	Mar-2016
Tested by: ACTION S.A.	Software Availability:	Mar-2016

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp2006 =	106
ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)	SPECfp_base2006 =	102

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp2006 =	106
ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)	SPECfp_base2006 =	102
CPU2006 license: 9008	Test date:	Nov-2016
Test sponsor: ACTION S.A.	Hardware Availability:	Mar-2016
Tested by: ACTION S.A.	Software Availability:	Mar-2016

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Dec 15 11:34:09 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 December 2016.