



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Inspur Corporation

**SPECint\_rate2006 = 1360**

### Inspur NF5460M4 (Intel Xeon E5-2683 v4)

**SPECint\_rate\_base2006 = 1310**

CPU2006 license: 3358


Test date: Jan-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

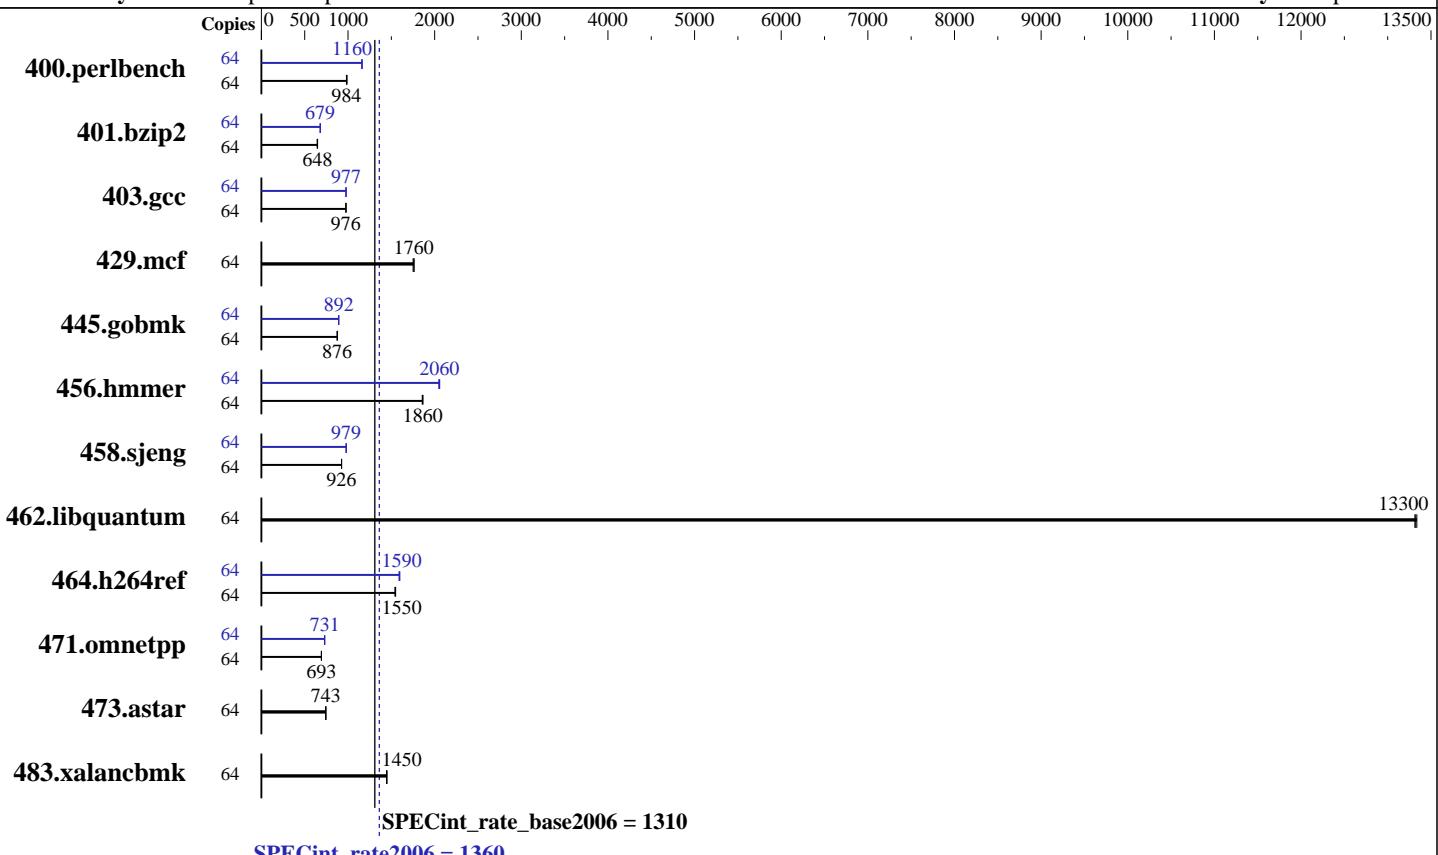

### Hardware

CPU Name: Intel Xeon E5-2683 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 40 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x 450 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 Compiler: 3.10.0-327.el7.x86\_64 C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1360**

Inspur NF5460M4 (Intel Xeon E5-2683 v4)

**SPECint\_rate\_base2006 = 1310**

CPU2006 license: 3358

Test date: Jan-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	637	982	632	989	<b><u>635</u></b>	<b><u>984</u></b>	64	<b><u>539</u></b>	<b><u>1160</u></b>	540	1160	538	1160
401.bzip2	64	952	648	960	643	<b><u>953</u></b>	<b><u>648</u></b>	64	<b><u>909</u></b>	<b><u>679</u></b>	909	679	908	680
403.gcc	64	527	977	<b><u>528</u></b>	<b><u>976</u></b>	528	975	64	527	977	<b><u>527</u></b>	<b><u>977</u></b>	527	977
429.mcf	64	333	1750	331	1760	<b><u>331</u></b>	<b><u>1760</u></b>	64	333	1750	331	1760	<b><u>331</u></b>	<b><u>1760</u></b>
445.gobmk	64	<b><u>767</u></b>	<b><u>876</u></b>	765	877	767	875	64	752	892	752	893	<b><u>752</u></b>	<b><u>892</u></b>
456.hmmer	64	322	1860	320	1860	<b><u>321</u></b>	<b><u>1860</u></b>	64	290	2060	<b><u>290</u></b>	<b><u>2060</u></b>	292	2050
458.sjeng	64	837	925	<b><u>837</u></b>	<b><u>926</u></b>	837	926	64	<b><u>791</u></b>	<b><u>979</u></b>	791	979	791	979
462.libquantum	64	99.6	13300	99.4	13300	<b><u>99.5</u></b>	<b><u>13300</u></b>	64	99.6	13300	99.4	13300	<b><u>99.5</u></b>	<b><u>13300</u></b>
464.h264ref	64	914	1550	<b><u>915</u></b>	<b><u>1550</u></b>	919	1540	64	886	1600	<b><u>889</u></b>	<b><u>1590</u></b>	891	1590
471.omnetpp	64	578	692	577	694	<b><u>577</u></b>	<b><u>693</u></b>	64	548	730	548	731	<b><u>548</u></b>	<b><u>731</u></b>
473.astar	64	605	743	603	745	<b><u>605</u></b>	<b><u>743</u></b>	64	605	743	603	745	<b><u>605</u></b>	<b><u>743</u></b>
483.xalancbmk	64	306	1450	<b><u>305</u></b>	<b><u>1450</u></b>	304	1450	64	306	1450	<b><u>305</u></b>	<b><u>1450</u></b>	304	1450

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS and OS configuration:

SCALING\_GOVERNOR set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

Sysinfo program /home/CPU2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on localhost.localdomain Tue Jan 17 03:37:13 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2683 v4 @ 2.10GHz

2 "physical id"s (chips)

64 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 1360

Inspur NF5460M4 (Intel Xeon E5-2683 v4)

SPECint\_rate\_base2006 = 1310

CPU2006 license: 3358

Test date: Jan-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 16
siblings   : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      263847436 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.2 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.2"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Jan 16 06:31
```

```
SPEC is set to: /home/CPU2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   393G   68G  325G  18% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 4.1.15 01/06/2017
Memory:
 4x NO DIMM NO DIMM
 16x Samsung M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1360**

Inspur NF5460M4 (Intel Xeon E5-2683 v4)

**SPECint\_rate\_base2006 = 1310**

CPU2006 license: 3358

Test date: Jan-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hammer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1360**

Inspur NF5460M4 (Intel Xeon E5-2683 v4)

**SPECint\_rate\_base2006 = 1310**

**CPU2006 license:** 3358

**Test date:** Jan-2017

**Test sponsor:** Inspur Corporation

**Hardware Availability:** Apr-2016

**Tested by:** Inspur Corporation

**Software Availability:** Sep-2016

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1360**

Inspur NF5460M4 (Intel Xeon E5-2683 v4)

**SPECint\_rate\_base2006 = 1310**

**CPU2006 license:** 3358

**Test date:** Jan-2017

**Test sponsor:** Inspur Corporation

**Hardware Availability:** Apr-2016

**Tested by:** Inspur Corporation

**Software Availability:** Sep-2016

## Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
                   -qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
                   -qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
                   -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2) -unroll14 -auto-ilp32  
                   -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2) -unroll12 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
                   -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
                   -no-prec-div(pass 2)  
                   -qopt-ra-region-strategy=block  
                   -qopt-mem-layout-trans=3 -Wl,-z,muldefs  
                   -L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1360**

Inspur NF5460M4 (Intel Xeon E5-2683 v4)

**SPECint\_rate\_base2006 = 1310**

**CPU2006 license:** 3358

**Test date:** Jan-2017

**Test sponsor:** Inspur Corporation

**Hardware Availability:** Apr-2016

**Tested by:** Inspur Corporation

**Software Availability:** Sep-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 7 17:00:31 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 February 2017.