



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS460  
(3.60 GHz, Intel Xeon E3-1270 v5)

SPECfp®\_rate2006 = 196

SPECfp\_rate\_base2006 = 190

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Feb-2017

Hardware Availability: Feb-2017

Software Availability: May-2016

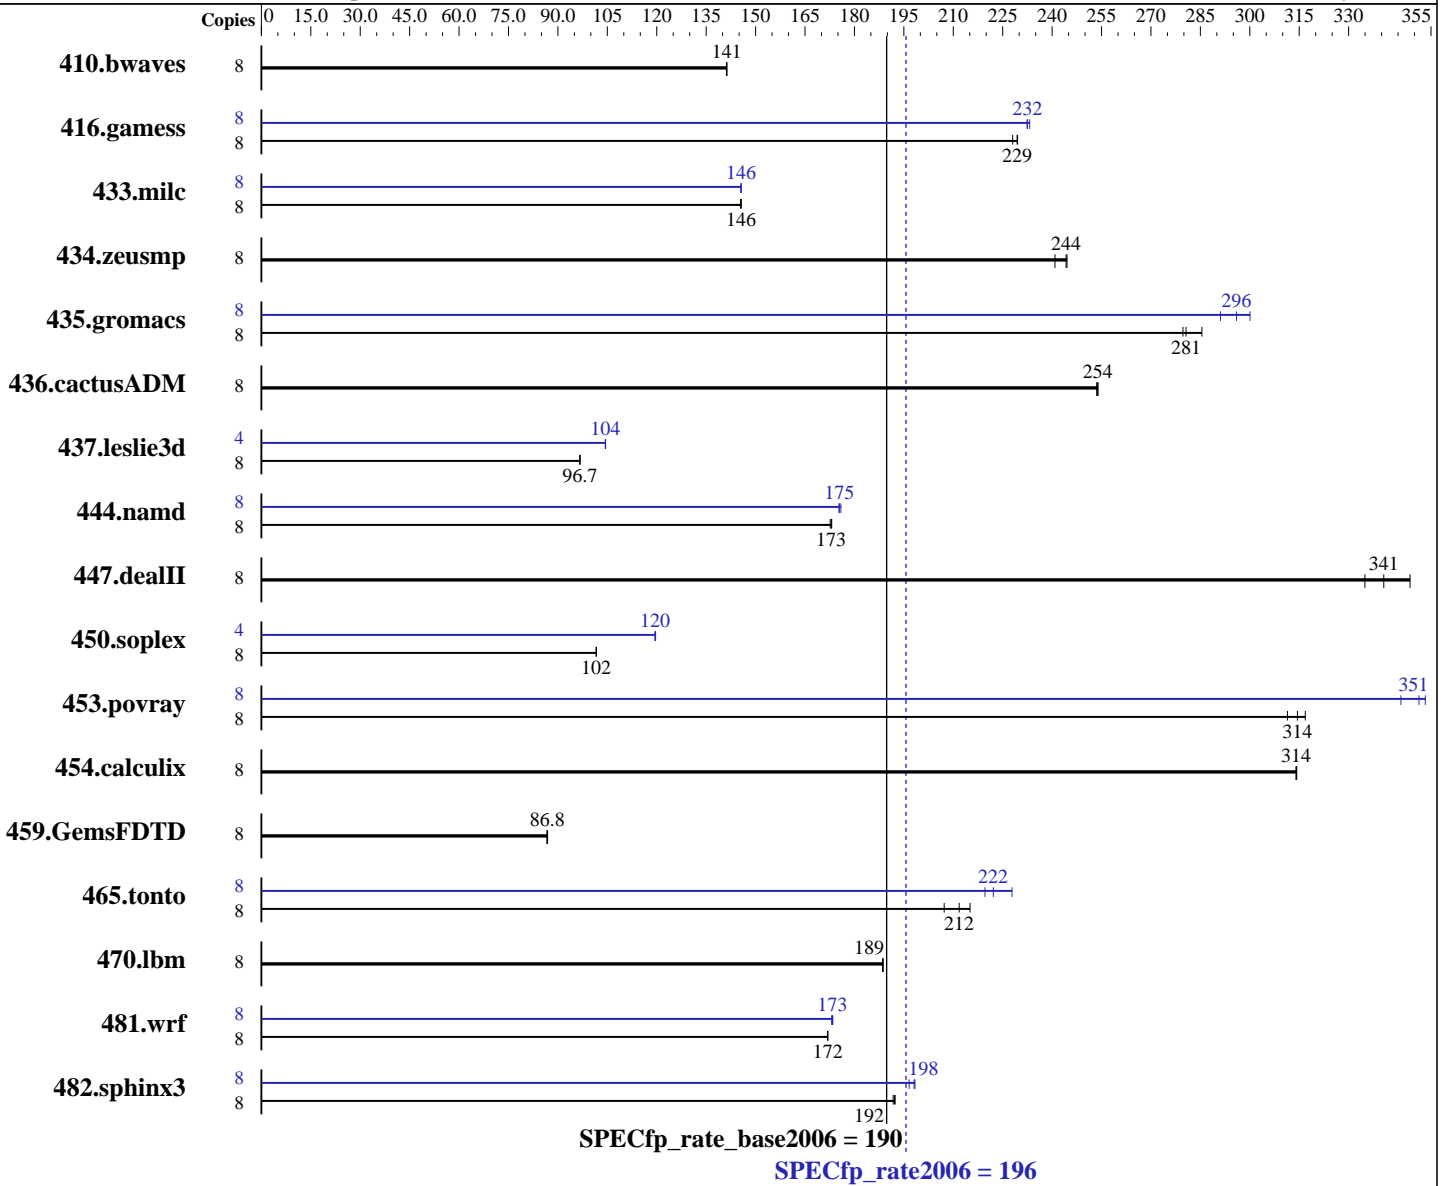

### Hardware

CPU Name: Intel Xeon E3-1270 v5  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.8 (Santiago)  
 Kernel 2.6.32-642.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 196

Lenovo ThinkServer TS460  
(3.60 GHz, Intel Xeon E3-1270 v5)

SPECfp\_rate\_base2006 = 190

CPU2006 license: 9017

Test date: Feb-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Feb-2017

Tested by: Lenovo Group Limited

Software Availability: May-2016

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC4-2133P-E)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<u>770</u>	<u>141</u>	770	141	769	141	8	<u>770</u>	<u>141</u>	770	141	769	141
416.gamess	8	<u>683</u>	<u>229</u>	682	230	687	228	8	<u>674</u>	<u>232</u>	672	233	674	232
433.milc	8	505	145	504	146	<u>504</u>	<u>146</u>	8	<u>504</u>	<u>146</u>	504	146	504	146
434.zeusmp	8	298	245	302	241	<u>298</u>	<u>244</u>	8	298	245	302	241	<u>298</u>	<u>244</u>
435.gromacs	8	<u>204</u>	<u>281</u>	204	280	200	285	8	196	291	<u>193</u>	<u>296</u>	190	300
436.cactusADM	8	377	254	<u>377</u>	<u>254</u>	376	254	8	377	254	<u>377</u>	<u>254</u>	376	254
437.leslie3d	8	778	96.7	<u>778</u>	<u>96.7</u>	778	96.6	4	<u>360</u>	<u>104</u>	360	104	360	104
444.namd	8	<u>371</u>	<u>173</u>	372	173	371	173	8	<u>366</u>	<u>175</u>	365	176	366	175
447.dealII	8	273	335	263	349	<u>269</u>	<u>341</u>	8	273	335	263	349	<u>269</u>	<u>341</u>
450.soplex	8	<u>656</u>	<u>102</u>	656	102	657	102	4	279	119	<u>279</u>	<u>120</u>	279	120
453.povray	8	137	311	134	317	<u>135</u>	<u>314</u>	8	<u>121</u>	<u>351</u>	123	346	120	353
454.calculix	8	<u>210</u>	<u>314</u>	210	314	210	314	8	<u>210</u>	<u>314</u>	210	314	210	314
459.GemsFDTD	8	977	86.9	979	86.7	<u>978</u>	<u>86.8</u>	8	977	86.9	979	86.7	<u>978</u>	<u>86.8</u>
465.tonto	8	366	215	380	207	<u>372</u>	<u>212</u>	8	346	228	<u>354</u>	<u>222</u>	358	220
470.lbm	8	583	189	583	189	<u>583</u>	<u>189</u>	8	583	189	583	189	<u>583</u>	<u>189</u>
481.wrf	8	520	172	<u>520</u>	<u>172</u>	520	172	8	515	173	516	173	<u>516</u>	<u>173</u>
482.sphinx3	8	<u>811</u>	<u>192</u>	813	192	811	192	8	786	198	<u>787</u>	<u>198</u>	793	197

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECfp\_rate2006 = 196**

Lenovo ThinkServer TS460  
(3.60 GHz, Intel Xeon E3-1270 v5)

**SPECfp\_rate\_base2006 = 190**

**CPU2006 license:** 9017

**Test date:** Feb-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Feb-2017

**Tested by:** Lenovo Group Limited

**Software Availability:** May-2016

### Platform Notes

#### BIOS Configuration:

```
Boot performance mode set to Turbo Performance
Sysinfo program /home/cpu2006-ic14/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on TS460-01 Sun Feb 19 10:27:08 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

#### From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1270 v5 @ 3.60GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
cache size : 8192 KB
```

#### From /proc/meminfo

```
MemTotal:      16273840 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

#### /usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.8 (Santiago)
```

#### From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.8 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.8 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

#### uname -a:

```
Linux TS460-01 2.6.32-642.el6.x86_64 #1 SMP Wed Apr 13 00:51:26 EDT 2016
x86_64 x86_64 x86_64 GNU/Linux
```

#### run-level 3 Feb 19 02:29

#### SPEC is set to: /home/cpu2006-ic14

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        ext4   50G   17G   31G  36% /
```

#### Additional information from dmidecode:

```
BIOS LENOVO TB1TS100 11/26/2016
Memory:
 2x      8 GB
 2x Not Specified Not Specified
 2x Samsung M391A1G43EB1-CPB 8 GB 2133 MHz 2 rank
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 196**

Lenovo ThinkServer TS460  
(3.60 GHz, Intel Xeon E3-1270 v5)

**SPECfp\_rate\_base2006 = 190**

**CPU2006 license:** 9017

**Test date:** Feb-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Feb-2017

**Tested by:** Lenovo Group Limited

**Software Availability:** May-2016

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-ic14/libs/32:/home/cpu2006-ic14/libs/64:/home/cpu2006-ic14/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 196

Lenovo ThinkServer TS460  
(3.60 GHz, Intel Xeon E3-1270 v5)

SPECfp\_rate\_base2006 = 190

CPU2006 license: 9017

Test date: Feb-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Feb-2017

Tested by: Lenovo Group Limited

Software Availability: May-2016

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.deallI: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS460  
(3.60 GHz, Intel Xeon E3-1270 v5)

SPECfp\_rate2006 = 196

SPECfp\_rate\_base2006 = 190

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Feb-2017

Hardware Availability: Feb-2017

Software Availability: May-2016

## Peak Portability Flags (Continued)

```

454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
         -inline-level=0 -scalar-rep-

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS460  
(3.60 GHz, Intel Xeon E3-1270 v5)

**SPECfp\_rate2006 = 196**

**SPECfp\_rate\_base2006 = 190**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Feb-2017

**Hardware Availability:** Feb-2017

**Software Availability:** May-2016

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Mar 7 16:14:28 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 March 2017.