



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730xd (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp®2006 = 119

SPECfp_base2006 = 113

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2017

Hardware Availability: Oct-2016

Software Availability: Sep-2016

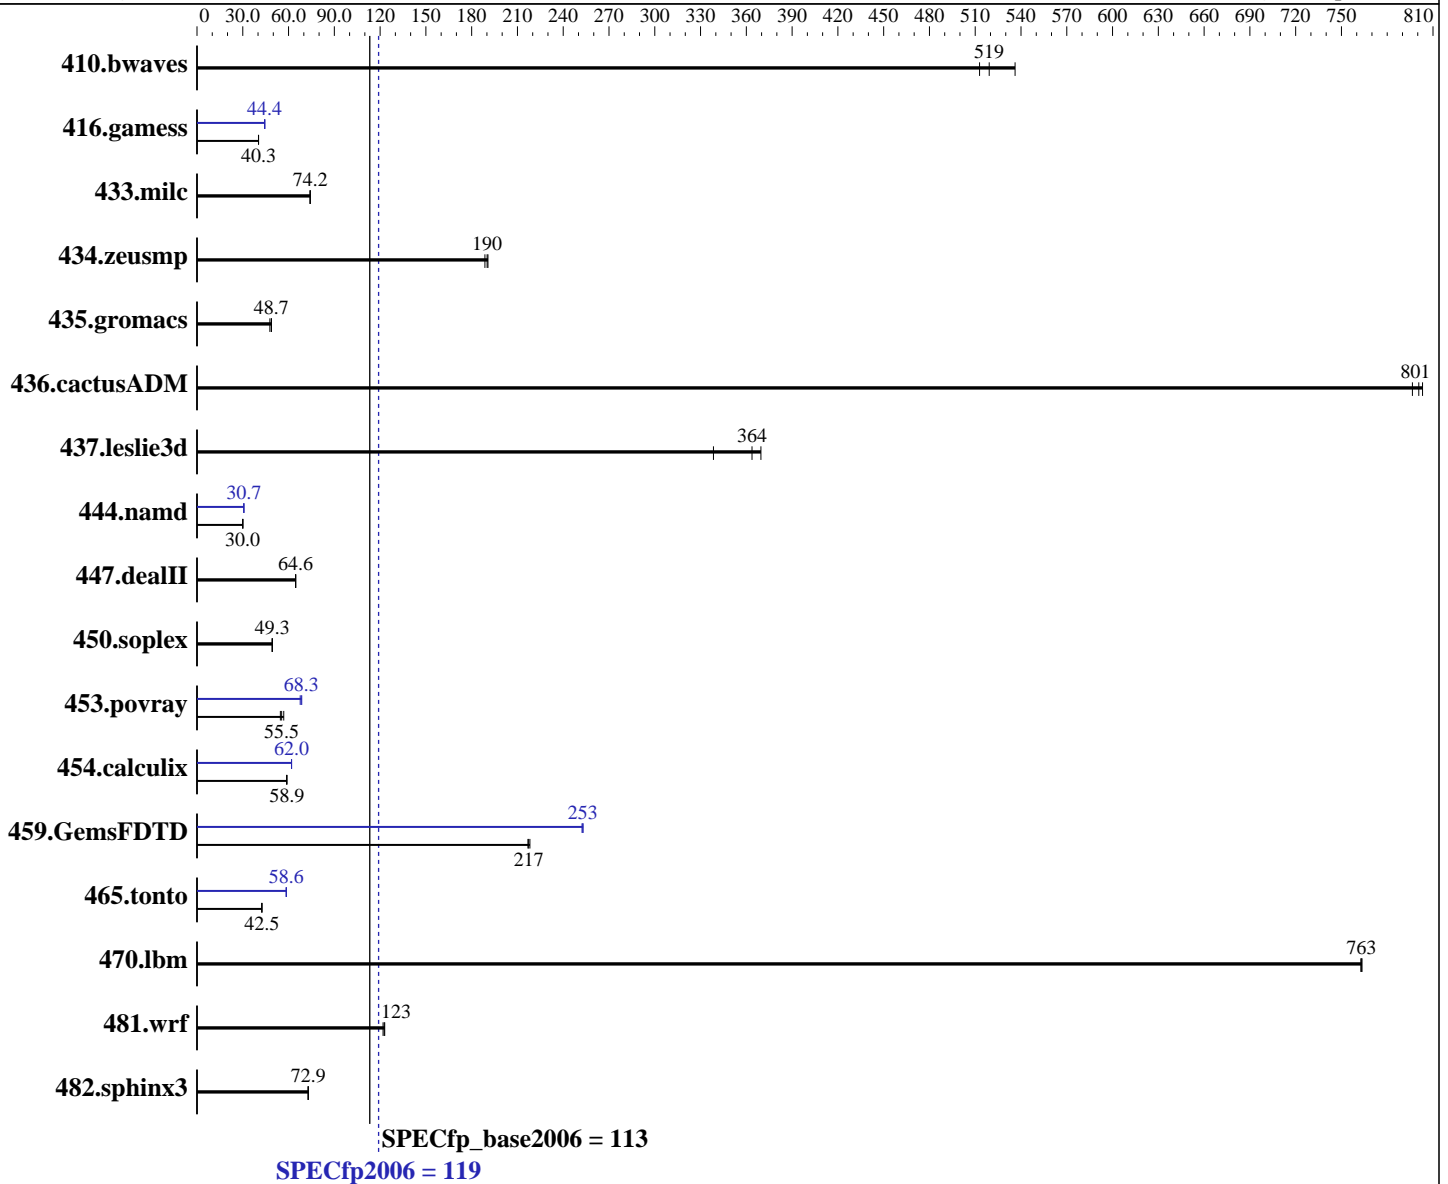

Hardware

CPU Name: Intel Xeon E5-2640 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12
 3.12.28-4-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran
 Compiler for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730xd (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp2006 = **119**

SPECfp_base2006 = **113**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2017

Hardware Availability: Oct-2016

Software Availability: Sep-2016

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 2 x 2000 GB 7200 RPM SAS RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	26.2	519	25.3	536	26.5	513	26.2	519	25.3	536	26.5	513
416.gamess	485	40.4	486	40.3	486	40.3	441	44.4	442	44.3	441	44.4
433.milc	124	74.2	124	74.1	124	74.2	124	74.2	124	74.1	124	74.2
434.zeusmp	47.7	191	48.2	189	47.9	190	47.7	191	48.2	189	47.9	190
435.gromacs	146	48.8	150	47.8	147	48.7	146	48.8	150	47.8	147	48.7
436.cactusADM	14.9	801	15.0	797	14.9	803	14.9	801	15.0	797	14.9	803
437.leslie3d	25.4	370	25.8	364	27.8	338	25.4	370	25.8	364	27.8	338
444.namd	267	30.0	267	30.0	267	30.0	261	30.7	261	30.7	261	30.7
447.dealII	177	64.6	177	64.6	177	64.7	177	64.6	177	64.6	177	64.7
450.soplex	169	49.4	169	49.3	169	49.3	169	49.4	169	49.3	169	49.3
453.povray	95.9	55.5	97.4	54.6	93.6	56.9	77.9	68.3	77.5	68.6	78.7	67.6
454.calculix	140	58.9	140	58.9	141	58.7	133	62.0	133	61.9	133	62.0
459.GemsFDTD	48.6	218	48.8	217	48.9	217	41.9	253	42.0	253	42.1	252
465.tonto	231	42.5	232	42.4	231	42.6	168	58.6	169	58.4	168	58.6
470.lbm	18.0	763	18.0	763	18.0	763	18.0	763	18.0	763	18.0	763
481.wrf	90.8	123	91.0	123	91.6	122	90.8	123	91.0	123	91.6	122
482.sphinx3	267	72.9	268	72.8	267	72.9	267	72.9	268	72.8	267	72.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Snoop Mode set to Opportunistic Snoop Broadcast
Virtualization Technology disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1E disabled
Energy Efficient Turbo disabled
Uncore Frequency set to Dynamic

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 119

PowerEdge R730xd (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp_base2006 = 113

CPU2006 license: 55

Test date: Feb-2017

Test sponsor: Dell Inc.

Hardware Availability: Oct-2016

Tested by: Dell Inc.

Software Availability: Sep-2016

Platform Notes (Continued)

Energy Efficiency Policy set to Performance
 Memory Patrol Scrub disabled
 Logical Processor disabled
 Sysinfo program /root/previous-cpu2006-1.2/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-0171 Thu Feb 2 21:32:06 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2640 v4 @ 2.40GHz
 2 "physical id"s (chips)
 20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 10
  siblings     : 10
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size     : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264567484 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-0171 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 119

PowerEdge R730xd (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp_base2006 = 113

CPU2006 license: 55

Test date: Feb-2017

Test sponsor: Dell Inc.

Hardware Availability: Oct-2016

Tested by: Dell Inc.

Software Availability: Sep-2016

Platform Notes (Continued)

run-level 3 Feb 2 15:06

SPEC is set to: /root/previous-cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	246G	18G	227G	8%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.3.4 11/08/2016

Memory:

7x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz, configured at 2133 MHz

9x 00CE00B300CE M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz, configured at 2133 MHz

8x Not Specified Not Specified

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/root/previous-cpu2006-1.2/libs/32:/root/previous-cpu2006-1.2/libs/64:/root/previous-cpu2006-1.2/sh10.2"

OMP_NUM_THREADS = "20"

The Dell PowerEdge R730 and the PowerEdge R730xd models are electronically equivalent. The results have been measured on a Dell PowerEdge R730xd model.

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo never > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730xd (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp2006 = 119

SPECfp_base2006 = 113

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2017

Hardware Availability: Oct-2016

Software Availability: Sep-2016

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

```

Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730xd (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp2006 = 119

SPECfp_base2006 = 113

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2017

Hardware Availability: Oct-2016

Software Availability: Sep-2016

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730xd (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp2006 = 119

SPECfp_base2006 = 113

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2017

Hardware Availability: Oct-2016

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Mar 22 10:49:04 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 March 2017.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>