



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>\_rate2006 = 207

PRIMERGY TX1310 M3, Intel Xeon E3-1245 v6, 3.7GHz

SPECfp\_rate\_base2006 = 203

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2017

Hardware Availability: Jun-2017

Software Availability: Nov-2016

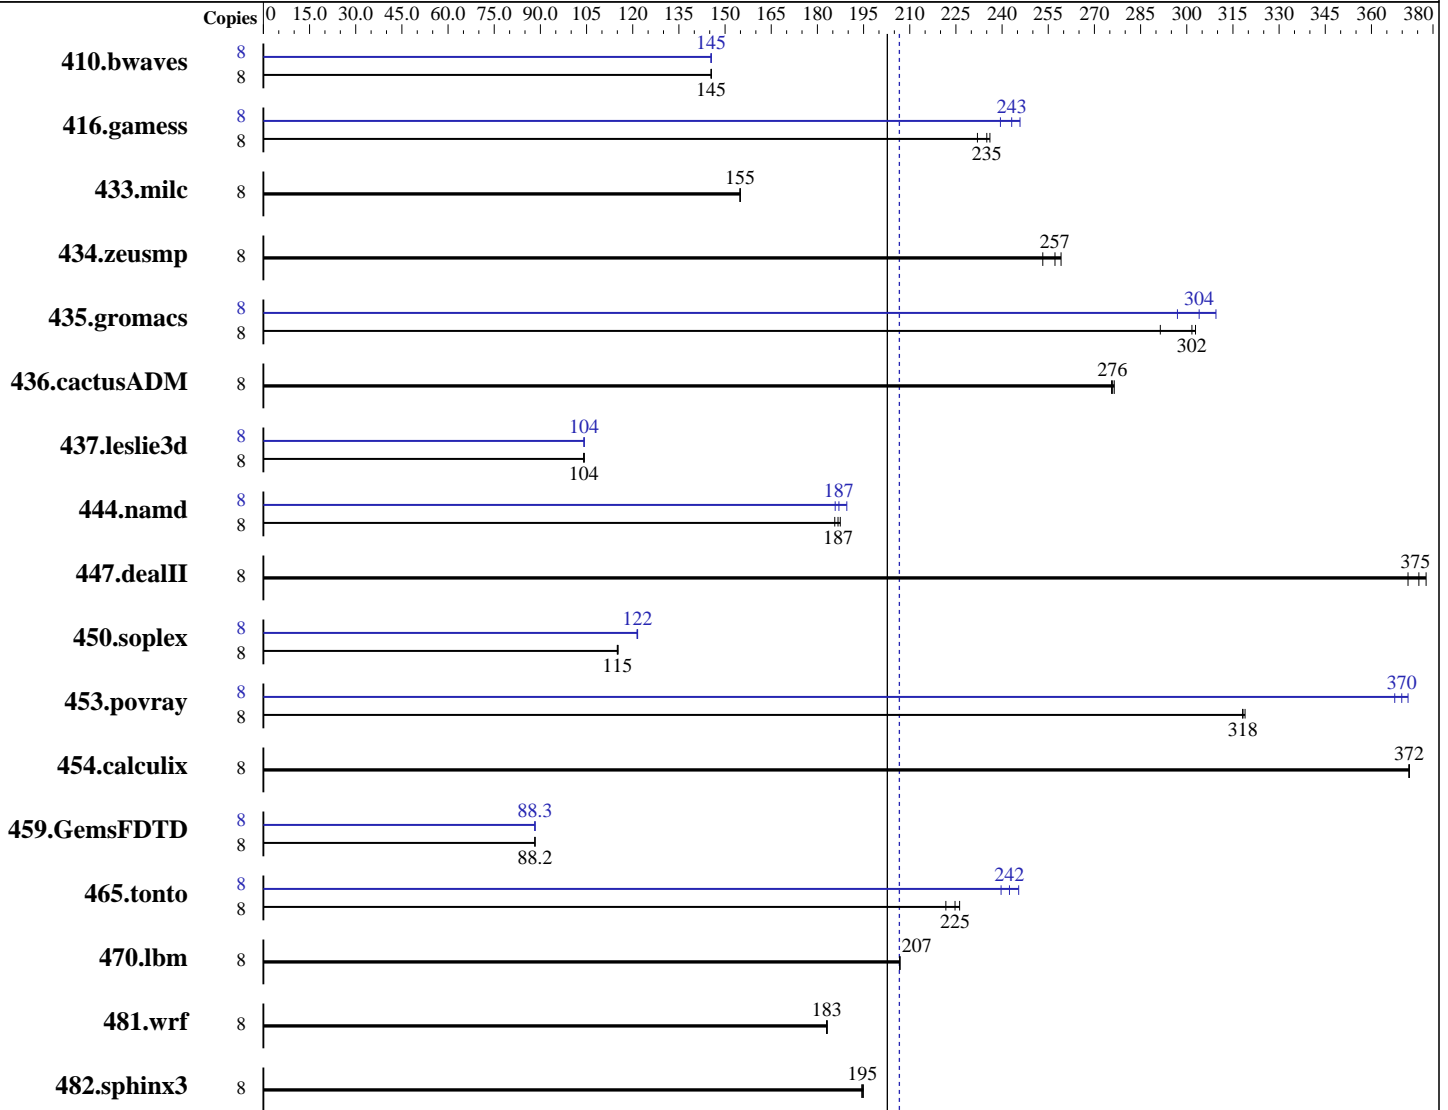

SPECfp\_rate\_base2006 = 203

SPECfp\_rate2006 = 207

### Hardware

CPU Name: Intel Xeon E3-1245 v6  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.10 GHz  
 CPU MHz: 3700  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64) 4.4.21-68-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 207

PRIMERGY TX1310 M3, Intel Xeon E3-1245 v6, 3.7GHz

SPECfp\_rate\_base2006 = 203

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2017

Hardware Availability: Jun-2017

Software Availability: Nov-2016

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)  
Disk Subsystem: 1 x 2TB, SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	747	146	747	145	<b>747</b>	<b>145</b>	8	747	146	747	145	<b>747</b>	<b>145</b>
416.gamess	8	664	236	675	232	<b>666</b>	<b>235</b>	8	637	246	<b>644</b>	<b>243</b>	654	239
433.milc	8	474	155	<b>474</b>	<b>155</b>	474	155	8	474	155	<b>474</b>	<b>155</b>	474	155
434.zeusmp	8	<b>283</b>	<b>257</b>	281	259	287	253	8	<b>283</b>	<b>257</b>	281	259	287	253
435.gromacs	8	<b>189</b>	<b>302</b>	189	303	196	291	8	192	297	<b>188</b>	<b>304</b>	185	309
436.cactusADM	8	346	276	<b>346</b>	<b>276</b>	347	276	8	346	276	<b>346</b>	<b>276</b>	347	276
437.leslie3d	8	723	104	721	104	<b>722</b>	<b>104</b>	8	722	104	<b>722</b>	<b>104</b>	722	104
444.namd	8	<b>344</b>	<b>187</b>	342	187	346	186	8	345	186	338	190	<b>343</b>	<b>187</b>
447.dealII	8	242	378	246	372	<b>244</b>	<b>375</b>	8	242	378	246	372	<b>244</b>	<b>375</b>
450.soplex	8	579	115	580	115	<b>580</b>	<b>115</b>	8	<b>549</b>	<b>122</b>	550	121	549	122
453.povray	8	134	318	<b>134</b>	<b>318</b>	133	319	8	114	372	<b>115</b>	<b>370</b>	116	368
454.calculix	8	177	372	<b>177</b>	<b>372</b>	177	372	8	177	372	<b>177</b>	<b>372</b>	177	372
459.GemsFDTD	8	962	88.2	<b>962</b>	<b>88.2</b>	962	88.2	8	962	88.3	<b>962</b>	<b>88.3</b>	962	88.2
465.tonto	8	<b>350</b>	<b>225</b>	348	226	355	222	8	321	245	<b>325</b>	<b>242</b>	328	240
470.lbm	8	532	207	<b>532</b>	<b>207</b>	532	207	8	532	207	<b>532</b>	<b>207</b>	532	207
481.wrf	8	488	183	<b>488</b>	<b>183</b>	488	183	8	488	183	<b>488</b>	<b>183</b>	488	183
482.sphinx3	8	802	194	800	195	<b>801</b>	<b>195</b>	8	802	194	800	195	<b>801</b>	<b>195</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Turbo mode set with :
cpupower -c all frequency-set -g performance
cpupower idle-set -d 2
cpupower idle-set -d 3
cpupower idle-set -d 4
echo always > /sys/kernel/mm/transparent_hugepage/enabled
echo 1 > /proc/sys/vm/drop_caches
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 207**

PRIMERGY TX1310 M3, Intel Xeon E3-1245 v6, 3.7GHz

**SPECfp\_rate\_base2006 = 203**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2017  
**Hardware Availability:** Jun-2017  
**Software Availability:** Nov-2016

## Operating System Notes (Continued)

```
echo 1000000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 1500000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

## Platform Notes

Sysinfo program /home/benchmark/speccpu-20160922-updated/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-hz4t Thu Mar 2 14:08:07 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1245 v6 @ 3.70GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      65791292 kB
HugePages_Total:    0
Hugepagesize:   2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-hz4t 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016
(63cf368) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 207**

PRIMERGY TX1310 M3, Intel Xeon E3-1245 v6, 3.7GHz

**SPECfp\_rate\_base2006 = 203**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2017  
**Hardware Availability:** Jun-2017  
**Software Availability:** Nov-2016

## Platform Notes (Continued)

run-level 3 Mar 2 14:04

SPEC is set to: /home/benchmark/speccpu-20160922-updated  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda3 xfs 1.8T 6.5G 1.8T 1% /home  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R0.93.0 for D3521-A1x

02/23/2017

Memory:

4x Samsung M391A2K43BB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = \*/home/benchmark/speccpu-20160922-updated/libs/32:/home/benchmark/speccpu-20160922-updated/libs/64:/home/benchmark/speccpu-20160922-updated/sh10.2\*

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 207**

PRIMERGY TX1310 M3, Intel Xeon E3-1245 v6, 3.7GHz

**SPECfp\_rate\_base2006 = 203**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Mar-2017

**Hardware Availability:** Jun-2017

**Software Availability:** Nov-2016

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 207**

PRIMERGY TX1310 M3, Intel Xeon E3-1245 v6, 3.7GHz

**SPECfp\_rate\_base2006 = 203**

**CPU2006 license:** 19

**Test date:** Mar-2017

**Test sponsor:** Fujitsu

**Hardware Availability:** Jun-2017

**Tested by:** Fujitsu

**Software Availability:** Nov-2016

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -fno-alias -auto-ilp32  
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 207**

PRIMERGY TX1310 M3, Intel Xeon E3-1245 v6, 3.7GHz

**SPECfp\_rate\_base2006 = 203**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Mar-2017

**Hardware Availability:** Jun-2017

**Software Availability:** Nov-2016

## Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevE.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 207

PRIMERGY TX1310 M3, Intel Xeon E3-1245 v6, 3.7GHz

SPECfp\_rate\_base2006 = 203

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2017

Hardware Availability: Jun-2017

Software Availability: Nov-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Apr 4 16:57:15 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 April 2017.