



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp<sup>®</sup>\_rate2006 = 1030

Lenovo System x3550 M5  
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp\_rate\_base2006 = 1010

CPU2006 license: 9017


Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

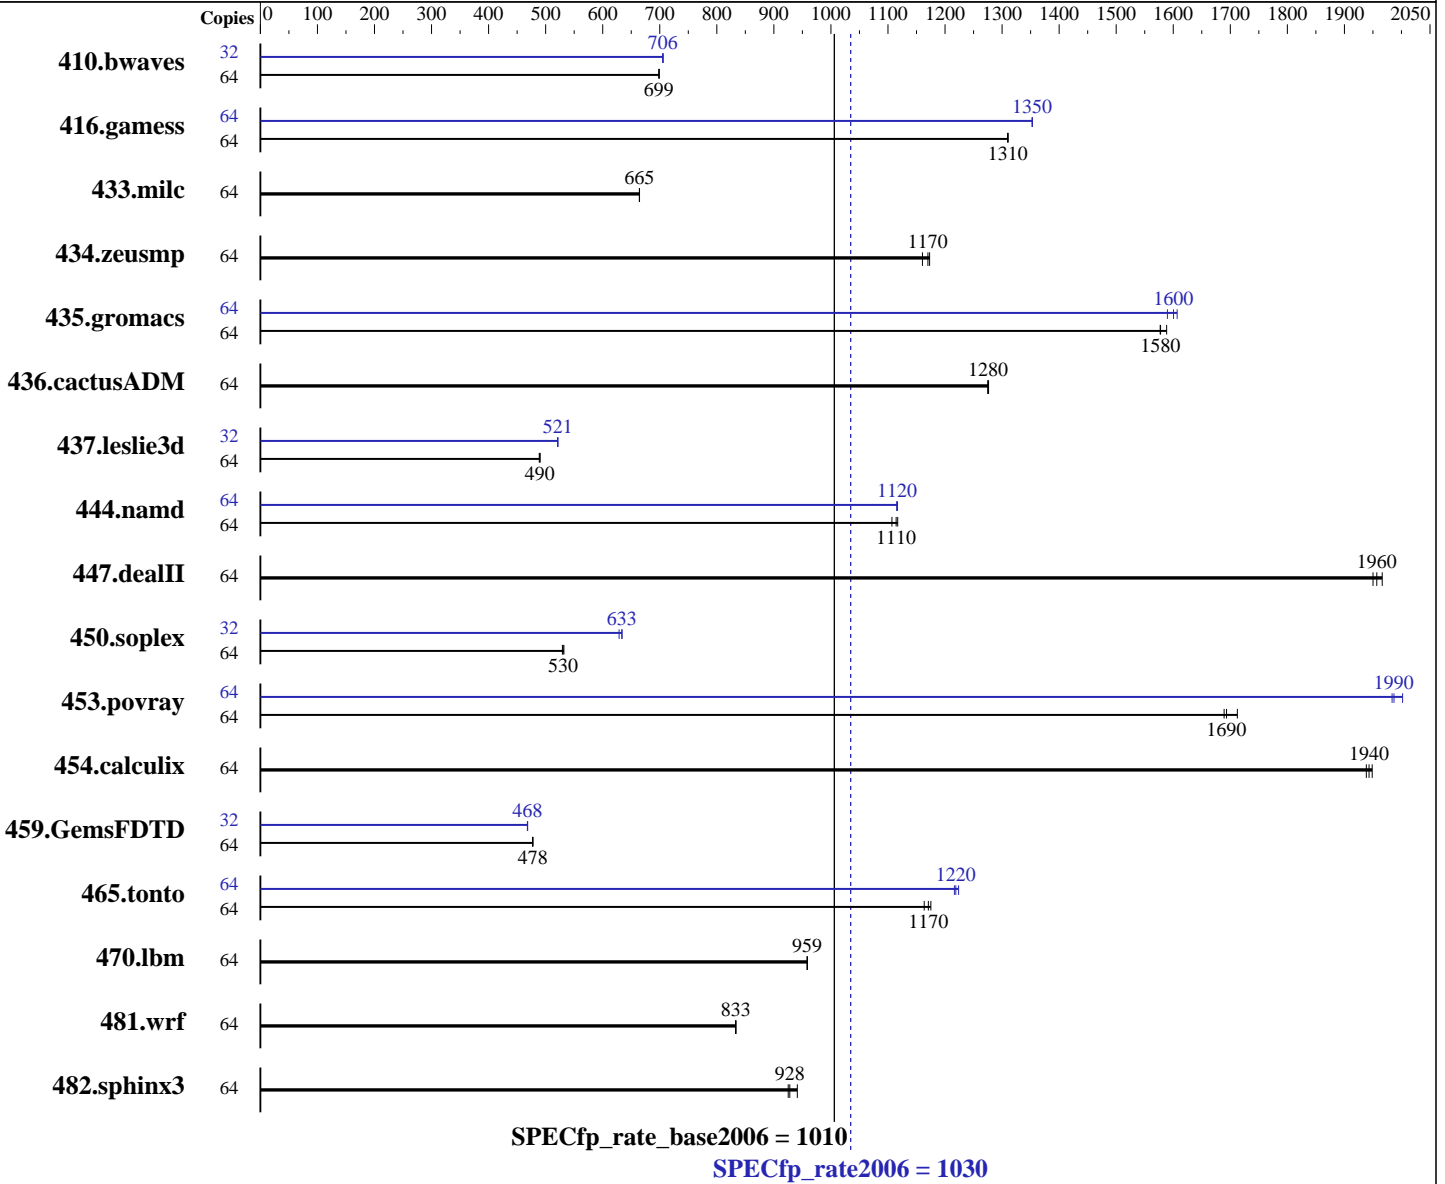

### Hardware

CPU Name: Intel Xeon E5-2697A v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 1030

Lenovo System x3550 M5  
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp\_rate\_base2006 = 1010

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

L3 Cache: 40 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	64	1244	699	<u>1245</u>	<u>699</u>	1245	699	32	<u>616</u>	<u>706</u>	617	705	616	706		
416.gamess	64	956	1310	957	1310	<u>957</u>	<u>1310</u>	64	926	1350	926	1350	<u>926</u>	<u>1350</u>		
433.milc	64	<u>884</u>	<u>665</u>	885	664	884	665	64	<u>884</u>	<u>665</u>	885	664	884	665		
434.zeusmp	64	497	1170	<u>498</u>	<u>1170</u>	502	1160	64	497	1170	<u>498</u>	<u>1170</u>	502	1160		
435.gromacs	64	290	1580	<u>290</u>	<u>1580</u>	288	1590	64	284	1610	287	1590	<u>286</u>	<u>1600</u>		
436.cactusADM	64	<u>600</u>	<u>1280</u>	599	1280	600	1270	64	<u>600</u>	<u>1280</u>	599	1280	600	1270		
437.leslie3d	64	1227	490	1231	489	<u>1229</u>	<u>490</u>	32	577	521	<u>577</u>	<u>521</u>	577	521		
444.namd	64	459	1120	464	1110	<u>461</u>	<u>1110</u>	64	460	1120	460	1120	<u>460</u>	<u>1120</u>		
447.dealII	64	375	1950	372	1970	<u>374</u>	<u>1960</u>	64	375	1950	372	1970	<u>374</u>	<u>1960</u>		
450.soplex	64	<u>1006</u>	<u>530</u>	1003	532	1008	529	32	421	634	<u>421</u>	<u>633</u>	424	629		
453.povray	64	202	1690	<u>201</u>	<u>1690</u>	199	1710	64	170	2000	<u>171</u>	<u>1990</u>	172	1980		
454.calculix	64	<u>272</u>	<u>1940</u>	271	1950	272	1940	64	<u>272</u>	<u>1940</u>	271	1950	272	1940		
459.GemsFDTD	64	<u>1422</u>	<u>478</u>	1422	478	1423	477	32	<u>725</u>	<u>468</u>	725	468	726	468		
465.tonto	64	<u>538</u>	<u>1170</u>	541	1160	536	1180	64	<u>517</u>	<u>1220</u>	515	1220	518	1220		
470.lbm	64	<u>917</u>	<u>959</u>	917	959	918	958	64	<u>917</u>	<u>959</u>	917	959	918	958		
481.wrf	64	858	833	858	834	<u>858</u>	<u>833</u>	64	858	833	858	834	<u>858</u>	<u>833</u>		
482.sphinx3	64	1348	925	<u>1344</u>	<u>928</u>	1325	941	64	1348	925	<u>1344</u>	<u>928</u>	1325	941		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 1030

Lenovo System x3550 M5  
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp\_rate\_base2006 = 1010

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

## Platform Notes

### BIOS Configuration:

```

Operating Mode set to Maximum Performance
COD Preference set to Enable
DCU Streamer Prefetcher set to Disable
Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on 123123 Sat Mar 11 04:11:49 2017

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) CPU E5-2697A v4 @ 2.60GHz
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 16
  siblings     : 32
 physical 0:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 physical 1:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 cache size    : 20480 KB

```

### From /proc/meminfo

```

MemTotal:      263824300 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

### From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

### uname -a:

```

Linux 123123 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 10 17:55

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 1030**

Lenovo System x3550 M5  
(2.60 GHz, Intel Xeon E5-2697A v4)

**SPECfp\_rate\_base2006 = 1010**

**CPU2006 license:** 9017

**Test date:** Mar-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2016

## Platform Notes (Continued)

```

SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   689G  58G  632G   9% /home
Additional information from dmidecode:

```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS LENOVO -[TBE123H-2.10]- 03/25/2016
Memory:
 8x NO DIMM Unknown
16x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz

```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```

## Base Compiler Invocation

```

C benchmarks:
  icc -m64

C++ benchmarks:
  icpc -m64

Fortran benchmarks:
  ifort -m64

Benchmarks using both Fortran and C:
  icc -m64 ifort -m64

```

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp\_rate2006 = 1030

Lenovo System x3550 M5  
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp\_rate\_base2006 = 1010

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

## Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

Fortran benchmarks:  
ifort -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 1030**

Lenovo System x3550 M5  
(2.60 GHz, Intel Xeon E5-2697A v4)

**SPECfp\_rate\_base2006 = 1010**

**CPU2006 license:** 9017

**Test date:** Mar-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2016

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -fno-alias -auto-ilp32  
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -qopt-malloc-options=3  
 -qopt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 1030

Lenovo System x3550 M5  
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp\_rate\_base2006 = 1010

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

## Peak Optimization Flags (Continued)

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(2.60 GHz, Intel Xeon E5-2697A v4)

SPECfp\_rate2006 = 1030

SPECfp\_rate\_base2006 = 1010

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Mar-2017

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Apr 4 16:57:13 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 April 2017.