



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 994

PowerEdge C6320p (Intel Xeon Phi 7230 1.30 GHz)

SPECint_rate_base2006 = 924

CPU2006 license: 55


Test date: Mar-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

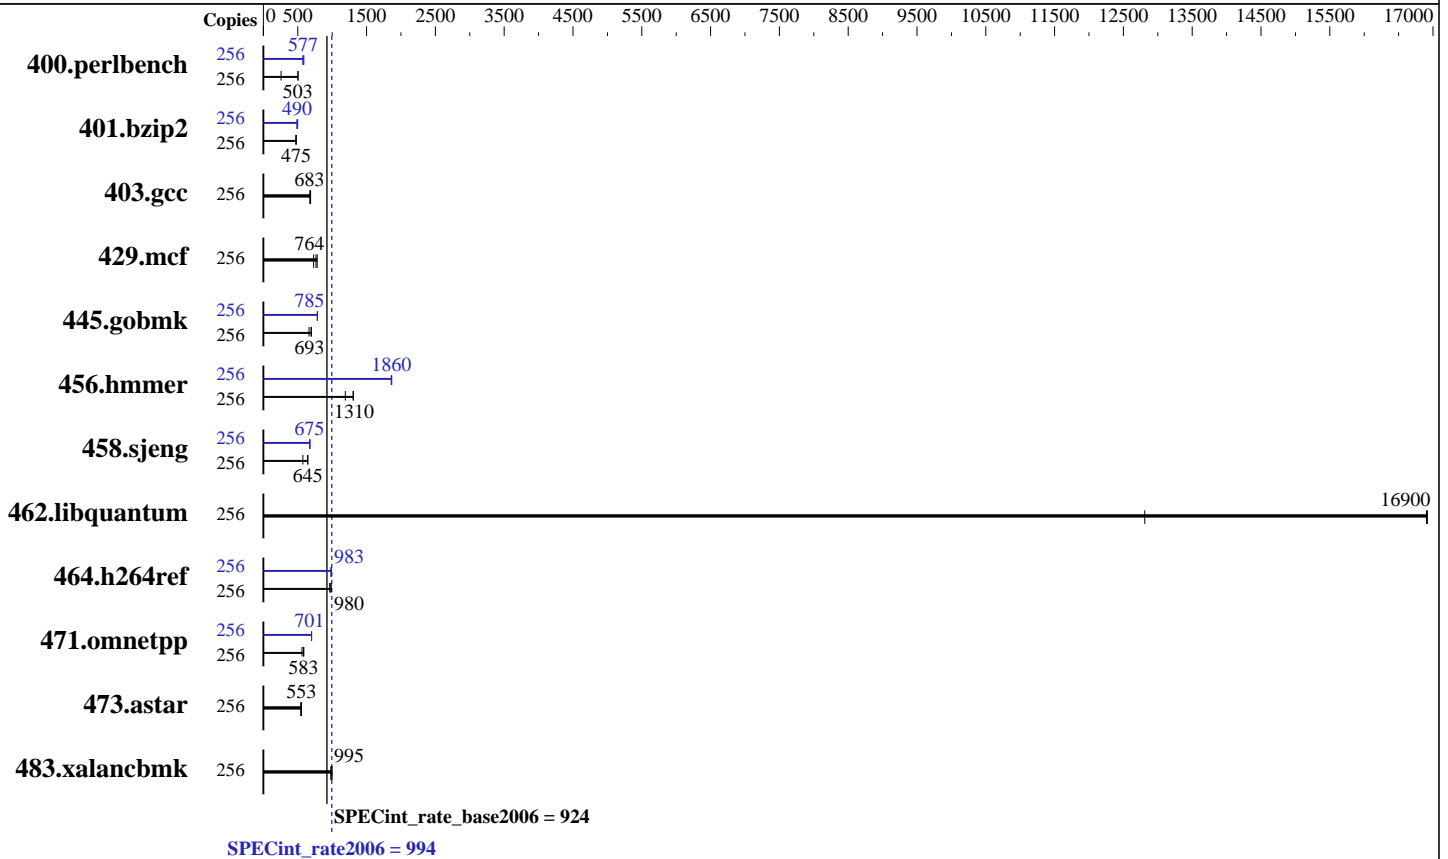

Hardware

CPU Name: Intel Xeon Phi 7230
 CPU Characteristics: Intel Turbo Boost Technology up to 1.50 GHz
 CPU MHz: 1300
 FPU: Integrated
 CPU(s) enabled: 64 cores, 1 chip, 64 cores/chip, 4 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per two cores
 L3 Cache: None
 Other Cache: None
 Memory: 400 GB (6 x 64 GB 2Rx8 PC4-2400T-R + 8 x 2 GB 7200 MHz MCDRAM)
 Disk Subsystem: 1 x 1 TB 7.2K RPM SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.16-56-default
 Compiler: C/C++; Version 16.0.2.181 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 994

PowerEdge C6320p (Intel Xeon Phi 7230 1.30 GHz)

SPECint_rate_base2006 = 924

CPU2006 license: 55

Test date: Mar-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	256	4970	503	9716	257	<u>4972</u>	<u>503</u>	256	4339	576	<u>4334</u>	<u>577</u>	4253	588
401.bzip2	256	<u>5198</u>	<u>475</u>	5197	475	5205	475	256	5048	489	<u>5047</u>	<u>490</u>	4951	499
403.gcc	256	<u>3016</u>	<u>683</u>	3053	675	3003	686	256	<u>3016</u>	<u>683</u>	3053	675	3003	686
429.mcf	256	3196	730	<u>3054</u>	<u>764</u>	2986	782	256	3196	730	<u>3054</u>	<u>764</u>	2986	782
445.gobmk	256	4048	663	3851	697	<u>3875</u>	<u>693</u>	256	3418	786	<u>3422</u>	<u>785</u>	3423	784
456.hammer	256	2006	1190	<u>1830</u>	<u>1310</u>	1828	1310	256	<u>1282</u>	<u>1860</u>	1286	1860	1280	1870
458.sjeng	256	5397	574	4790	647	<u>4805</u>	<u>645</u>	256	4595	674	4591	675	<u>4591</u>	<u>675</u>
462.libquantum	256	414	12800	<u>314</u>	<u>16900</u>	314	16900	256	414	12800	<u>314</u>	<u>16900</u>	314	16900
464.h264ref	256	5879	964	5744	986	<u>5783</u>	<u>980</u>	256	5729	989	<u>5762</u>	<u>983</u>	5763	983
471.omnetpp	256	2849	562	2719	588	<u>2746</u>	<u>583</u>	256	2286	700	<u>2284</u>	<u>701</u>	2284	701
473.astar	256	3312	543	<u>3249</u>	<u>553</u>	3245	554	256	3312	543	<u>3249</u>	<u>553</u>	3245	554
483.xalancbmk	256	1804	979	<u>1774</u>	<u>995</u>	1773	996	256	1804	979	<u>1774</u>	<u>995</u>	1773	996

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-z6tq Wed Mar 15 16:01:43 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Genuine Intel(R) CPU 0000 @ 1.30GHz
1 "physical id"s (chips)
256 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 64
siblings : 256
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 994

PowerEdge C6320p (Intel Xeon Phi 7230 1.30 GHz)

SPECint_rate_base2006 = 924

CPU2006 license: 55

Test date: Mar-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

Platform Notes (Continued)

```

physical 0: cores 0 1 8 9 12 13 14 15 18 19 20 21 22 23 24 25 26 27 28 29
              30 31 34 35 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 56 57 60 61 62
              63 64 65 66 67 68 69 70 71 72 73 74 75
cache size : 1024 KB

```

From /proc/meminfo

```

MemTotal:      396136360 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
# release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

```

Linux linux-z6tq 4.4.16-56-default #1 SMP Mon Aug 8 14:24:26 UTC 2016
(5b281a8) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 15 15:59

SPEC is set to: /root/cpu2006-1.2

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdb2        btrfs    930G  533G  395G  58% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.7 003/003/2017

Memory:

```

6x Hynix HMAA8GL7MMR4N-UH 64 GB 4 rank 2400 MHz
8x INTEL N/A 2 GB 7200 MHz

```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 994

PowerEdge C6320p (Intel Xeon Phi 7230 1.30 GHz)

SPECint_rate_base2006 = 924

CPU2006 license: 55

Test date: Mar-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with
Intel 2nd Generation Xeon Phi CPU
with 96 GB DDR4 memory using RedHat EL 7.2
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xMIC-AVX512 -ipo -O3 -no-prec-div -opt-prefetch

C++ benchmarks:

-xMIC-AVX512 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/sh -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 994

PowerEdge C6320p (Intel Xeon Phi 7230 1.30 GHz)

SPECint_rate_base2006 = 924

CPU2006 license: 55

Test date: Mar-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalanbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xMIC-AVX512 -ipo -O3 -no-prec-div -prof-gen(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -auto-ilp32

401.bzip2: -xMIC-AVX512 -ipo -O3 -no-prec-div -prof-gen(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -opt-prefetch
-auto-ilp32 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 994

PowerEdge C6320p (Intel Xeon Phi 7230 1.30 GHz)

SPECint_rate_base2006 = 924

CPU2006 license: 55

Test date: Mar-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

Peak Optimization Flags (Continued)

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xMIC-AVX512(pass 2) -prof-gen(pass 1)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias

456.hmmer: -xMIC-AVX512 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xMIC-AVX512 -ipo -O3 -no-prec-div -prof-gen(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xMIC-AVX512 -ipo -O3 -no-prec-div -prof-gen(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xMIC-AVX512 -ipo -O3 -no-prec-div -prof-gen(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 994

PowerEdge C6320p (Intel Xeon Phi 7230 1.30 GHz)

SPECint_rate_base2006 = 924

CPU2006 license: 55

Test date: Mar-2017

Test sponsor: Dell Inc.

Hardware Availability: Jan-2017

Tested by: Dell Inc.

Software Availability: Jan-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Mon Jun 12 12:43:44 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 June 2017.