



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1650**

Inspur NF5270M4 (Intel Xeon E5-2698 v4)

**SPECint\_rate\_base2006 = 1600**

CPU2006 license: 3358


**Test date:** Mar-2017

**Test sponsor:** Inspur Corporation

**Hardware Availability:** Mar-2016

**Tested by:** Inspur Corporation

**Software Availability:** Nov-2016

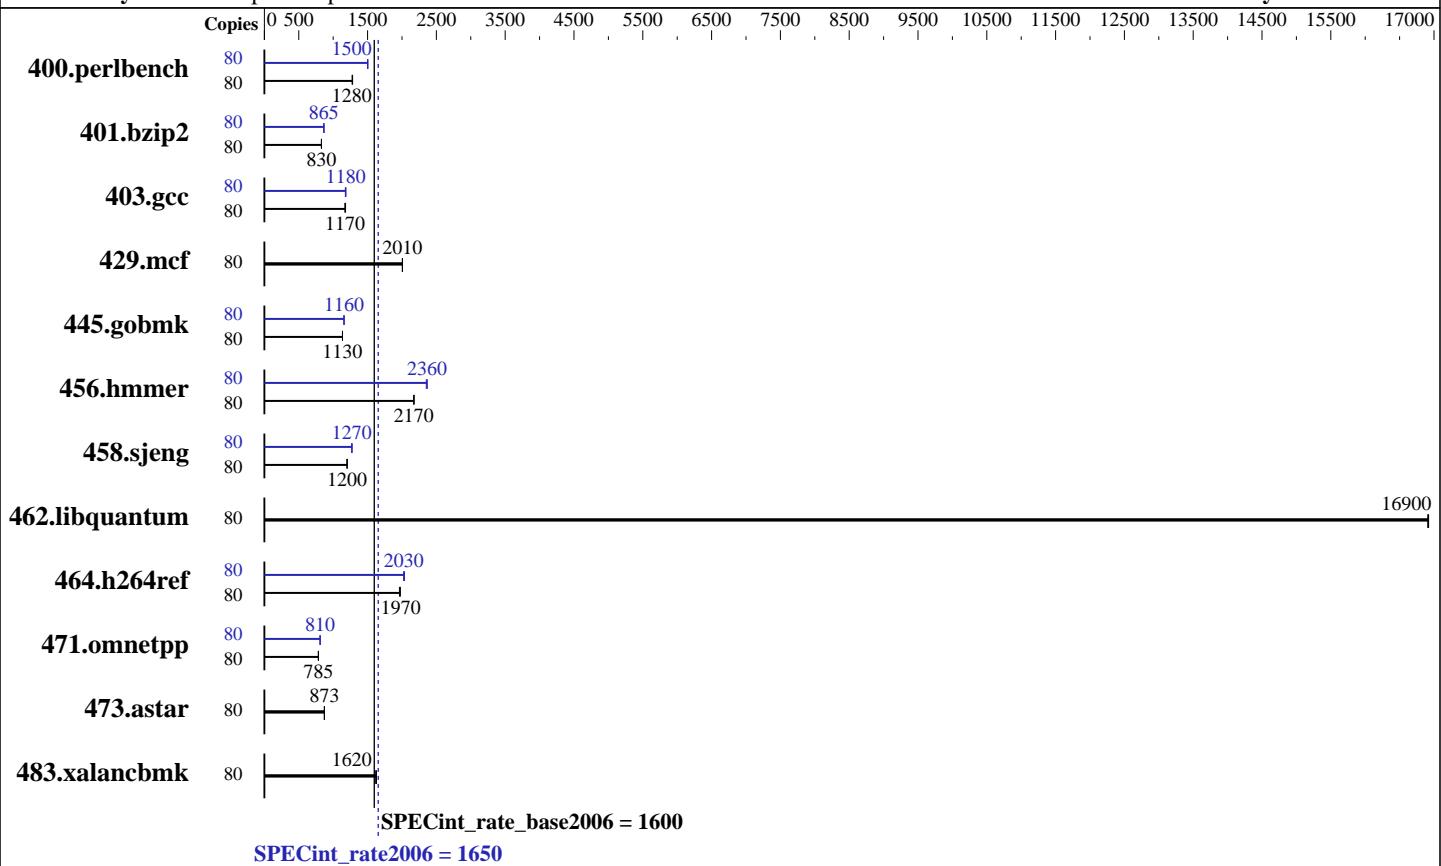

<b>Hardware</b>		<b>Software</b>	
CPU Name:	Intel Xeon E5-2698 v4	Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo)
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz		3.10.0-514.el7.x86_64
CPU MHz:	2200	Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
FPU:	Integrated	Auto Parallel:	No
CPU(s) enabled:	40 cores, 2 chips, 20 cores/chip, 2 threads/core	File System:	xfs
CPU(s) orderable:	1,2 chips	System State:	Run level 5 (multi-user)
Primary Cache:	32 KB I + 32 KB D on chip per core	Base Pointers:	32-bit
Secondary Cache:	256 KB I+D on chip per core	Peak Pointers:	32/64-bit
L3 Cache:	50 MB I+D on chip per chip	Other Software:	Microquill SmartHeap V10.2
Other Cache:	None		
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)		
Disk Subsystem:	1 x 450 GB SATA SSD		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1650**

Inspur NF5270M4 (Intel Xeon E5-2698 v4)

**SPECint\_rate\_base2006 = 1600**

CPU2006 license: 3358

Test date: Mar-2017

Test sponsor: Inspur Corporation

Hardware Availability: Mar-2016

Tested by: Inspur Corporation

Software Availability: Nov-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	610	1280	<b>611</b>	<b>1280</b>	612	1280	80	520	1500	521	1500	<b>521</b>	<b>1500</b>
401.bzip2	80	932	829	<b>930</b>	<b>830</b>	930	830	80	893	864	891	866	<b>893</b>	<b>865</b>
403.gcc	80	550	1170	<b>548</b>	<b>1170</b>	546	1180	80	544	1180	547	1180	<b>545</b>	<b>1180</b>
429.mcf	80	363	2010	364	2010	<b>364</b>	<b>2010</b>	80	363	2010	364	2010	<b>364</b>	<b>2010</b>
445.gobmk	80	739	1140	<b>739</b>	<b>1130</b>	740	1130	80	<b>725</b>	<b>1160</b>	725	1160	725	1160
456.hammer	80	<b>343</b>	<b>2170</b>	344	2170	343	2170	80	316	2370	<b>316</b>	<b>2360</b>	317	2350
458.sjeng	80	<b>805</b>	<b>1200</b>	805	1200	806	1200	80	<b>761</b>	<b>1270</b>	761	1270	761	1270
462.libquantum	80	98.0	16900	98.0	16900	<b>98.0</b>	<b>16900</b>	80	98.0	16900	98.0	16900	<b>98.0</b>	<b>16900</b>
464.h264ref	80	902	1960	<b>897</b>	<b>1970</b>	897	1970	80	<b>873</b>	<b>2030</b>	869	2040	874	2030
471.omnetpp	80	<b>637</b>	<b>785</b>	636	786	637	785	80	617	811	618	809	<b>617</b>	<b>810</b>
473.astar	80	<b>643</b>	<b>873</b>	643	873	645	871	80	<b>643</b>	<b>873</b>	643	873	645	871
483.xalancbmk	80	<b>340</b>	<b>1620</b>	339	1630	343	1610	80	<b>340</b>	<b>1620</b>	339	1630	343	1610

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS and OS configuration:

SCALING\_GOVERNOR set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

Sysinfo program /home/CPU2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on localhost.localdomain Fri Mar 31 05:31:53 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2698 v4 @ 2.20GHz

2 "physical id"s (chips)

80 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1650**

Inspur NF5270M4 (Intel Xeon E5-2698 v4)

**SPECint\_rate\_base2006 = 1600**

**CPU2006 license:** 3358

**Test date:** Mar-2017

**Test sponsor:** Inspur Corporation

**Hardware Availability:** Mar-2016

**Tested by:** Inspur Corporation

**Software Availability:** Nov-2016

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 20
siblings   : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      263844036 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.3 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.3"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 5 Mar 27 05:32

```
SPEC is set to: /home/CPU2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   392G  140G  253G  36%  /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 4.1.11 09/07/2016
Memory:
 8x NO DIMM NO DIMM
 16x Samsung M393A2K43BB1-CNC 16 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1650**

Inspur NF5270M4 (Intel Xeon E5-2698 v4)

**SPECint\_rate\_base2006 = 1600**

CPU2006 license: 3358

Test date: Mar-2017

Test sponsor: Inspur Corporation

Hardware Availability: Mar-2016

Tested by: Inspur Corporation

Software Availability: Nov-2016

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hammer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1650**

Inspur NF5270M4 (Intel Xeon E5-2698 v4)

**SPECint\_rate\_base2006 = 1600**

CPU2006 license: 3358

Test date: Mar-2017

Test sponsor: Inspur Corporation

Hardware Availability: Mar-2016

Tested by: Inspur Corporation

Software Availability: Nov-2016

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1650**

Inspur NF5270M4 (Intel Xeon E5-2698 v4)

**SPECint\_rate\_base2006 = 1600**

**CPU2006 license:** 3358

**Test date:** Mar-2017

**Test sponsor:** Inspur Corporation

**Hardware Availability:** Mar-2016

**Tested by:** Inspur Corporation

**Software Availability:** Nov-2016

## Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll14 -auto-ilp32  
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll12 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)  
-qopt-ra-region-strategy=block  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

**SPECint\_rate2006 = 1650**

Inspur NF5270M4 (Intel Xeon E5-2698 v4)

**SPECint\_rate\_base2006 = 1600**

**CPU2006 license:** 3358

**Test date:** Mar-2017

**Test sponsor:** Inspur Corporation

**Hardware Availability:** Mar-2016

**Tested by:** Inspur Corporation

**Software Availability:** Nov-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 2 14:04:53 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 May 2017.