



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

**SPECfp<sup>®</sup>2006 = 88.3**

Huawei CH242 V3 (Intel Xeon E7-4820 v4)

**SPECfp\_base2006 = 85.6**

CPU2006 license: 3175


Test date: Jun-2017

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Sep-2016

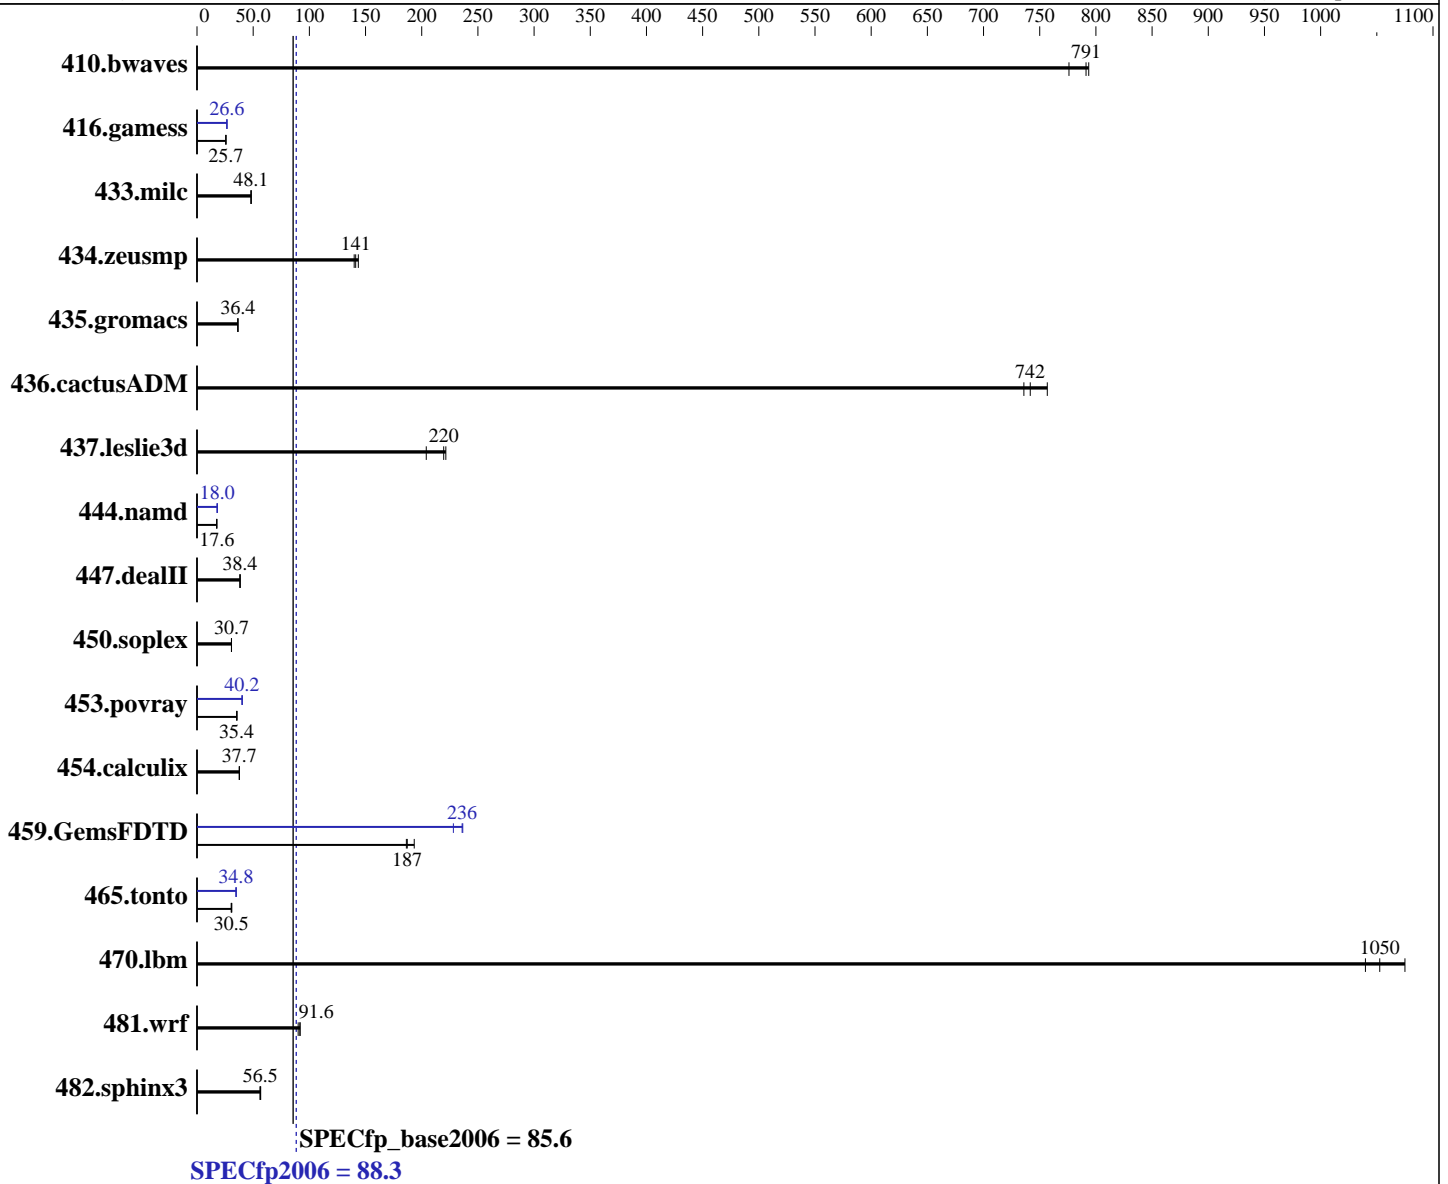

### Hardware

CPU Name: Intel Xeon E7-4820 v4  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **88.3**

Huawei CH242 V3 (Intel Xeon E7-4820 v4)

SPECfp\_base2006 = **85.6**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Jun-2016

Software Availability: Sep-2016

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)  
 Disk Subsystem: 1 x 960 GB SSD  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	17.1	794	<b><u>17.2</u></b>	<b><u>791</u></b>	17.5	776	17.1	794	<b><u>17.2</u></b>	<b><u>791</u></b>	17.5	776
416.gamess	762	25.7	761	25.7	<b><u>761</u></b>	<b><u>25.7</u></b>	735	26.6	<b><u>735</u></b>	<b><u>26.6</u></b>	736	26.6
433.milc	190	48.2	191	48.1	<b><u>191</u></b>	<b><u>48.1</u></b>	190	48.2	191	48.1	<b><u>191</u></b>	<b><u>48.1</u></b>
434.zeusmp	<b><u>64.4</u></b>	<b><u>141</u></b>	63.4	144	65.1	140	<b><u>64.4</u></b>	<b><u>141</u></b>	63.4	144	65.1	140
435.gromacs	<b><u>196</u></b>	<b><u>36.4</u></b>	196	36.4	196	36.3	<b><u>196</u></b>	<b><u>36.4</u></b>	196	36.4	196	36.3
436.cactusADM	<b><u>16.1</u></b>	<b><u>742</u></b>	15.8	757	16.2	736	<b><u>16.1</u></b>	<b><u>742</u></b>	15.8	757	16.2	736
437.leslie3d	<b><u>42.8</u></b>	<b><u>220</u></b>	46.1	204	42.4	221	<b><u>42.8</u></b>	<b><u>220</u></b>	46.1	204	42.4	221
444.namd	<b><u>456</u></b>	<b><u>17.6</u></b>	456	17.6	456	17.6	<b><u>446</u></b>	<b><u>18.0</u></b>	446	18.0	446	18.0
447.dealII	299	38.2	298	38.4	<b><u>298</u></b>	<b><u>38.4</u></b>	299	38.2	298	38.4	<b><u>298</u></b>	<b><u>38.4</u></b>
450.soplex	<b><u>272</u></b>	<b><u>30.7</u></b>	271	30.7	272	30.6	<b><u>272</u></b>	<b><u>30.7</u></b>	271	30.7	272	30.6
453.povray	150	35.4	<b><u>150</u></b>	<b><u>35.4</u></b>	150	35.6	133	40.1	132	40.2	<b><u>132</u></b>	<b><u>40.2</u></b>
454.calculix	219	37.7	218	37.8	<b><u>219</u></b>	<b><u>37.7</u></b>	219	37.7	218	37.8	<b><u>219</u></b>	<b><u>37.7</u></b>
459.GemsFDTD	54.9	193	56.9	186	<b><u>56.7</u></b>	<b><u>187</u></b>	46.5	228	<b><u>45.0</u></b>	<b><u>236</u></b>	44.9	237
465.tonto	322	30.5	317	31.0	<b><u>322</u></b>	<b><u>30.5</u></b>	283	34.8	283	34.8	<b><u>283</u></b>	<b><u>34.8</u></b>
470.lbm	13.2	1040	12.8	1080	<b><u>13.1</u></b>	<b><u>1050</u></b>	13.2	1040	12.8	1080	<b><u>13.1</u></b>	<b><u>1050</u></b>
481.wrf	124	90.0	<b><u>122</u></b>	<b><u>91.6</u></b>	122	91.8	124	90.0	<b><u>122</u></b>	<b><u>91.6</u></b>	122	91.8
482.sphinx3	<b><u>345</u></b>	<b><u>56.5</u></b>	344	56.7	348	56.0	<b><u>345</u></b>	<b><u>56.5</u></b>	344	56.7	348	56.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Custom  
 Set Hyper-Threading to Disabled  
 Set Lock\_step to disabled  
 Baseboard Management Controller used to adjust the fan speed to 100  
 Sysinfo program /spec/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on localhost.localdomain Sat Sep 23 18:46:42 2017

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.3

Huawei CH242 V3 (Intel Xeon E7-4820 v4)

SPECfp\_base2006 = 85.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Jun-2016

Software Availability: Sep-2016

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E7-4820 v4 @ 2.00GHz
 4 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 10
  siblings       : 10
  physical 0:    cores 0 1 2 3 4 8 9 10 11 12
  physical 1:    cores 0 1 2 3 4 8 9 10 11 12
  physical 2:    cores 0 1 2 3 4 8 9 10 11 12
  physical 3:    cores 0 1 2 3 4 8 9 10 11 12
cache size      : 25600 KB
```

From /proc/meminfo

```
MemTotal:      528084120 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 23 10:50

SPEC is set to: /spec

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        ext4      796G  160G  596G  22% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.3

Huawei CH242 V3 (Intel Xeon E7-4820 v4)

SPECfp\_base2006 = 85.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Jun-2016

Software Availability: Sep-2016

## Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV796 03/10/2017

Memory:

32x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1333 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh10.2"

OMP\_NUM\_THREADS = "40"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.3

Huawei CH242 V3 (Intel Xeon E7-4820 v4)

SPECfp\_base2006 = 85.6

CPU2006 license: 3175

Test date: Jun-2017

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Sep-2016

## Base Portability Flags (Continued)

```

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.3

Huawei CH242 V3 (Intel Xeon E7-4820 v4)

SPECfp\_base2006 = 85.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Jun-2016

Software Availability: Sep-2016

## Peak Optimization Flags

### C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.3

Huawei CH242 V3 (Intel Xeon E7-4820 v4)

SPECfp\_base2006 = 85.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Jun-2016

Software Availability: Sep-2016

## Peak Optimization Flags (Continued)

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jul 12 12:13:01 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 July 2017.