



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp®2006 = 115**

**SPECfp\_base2006 = 108**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

**Test date:** Jul-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Jul-2017

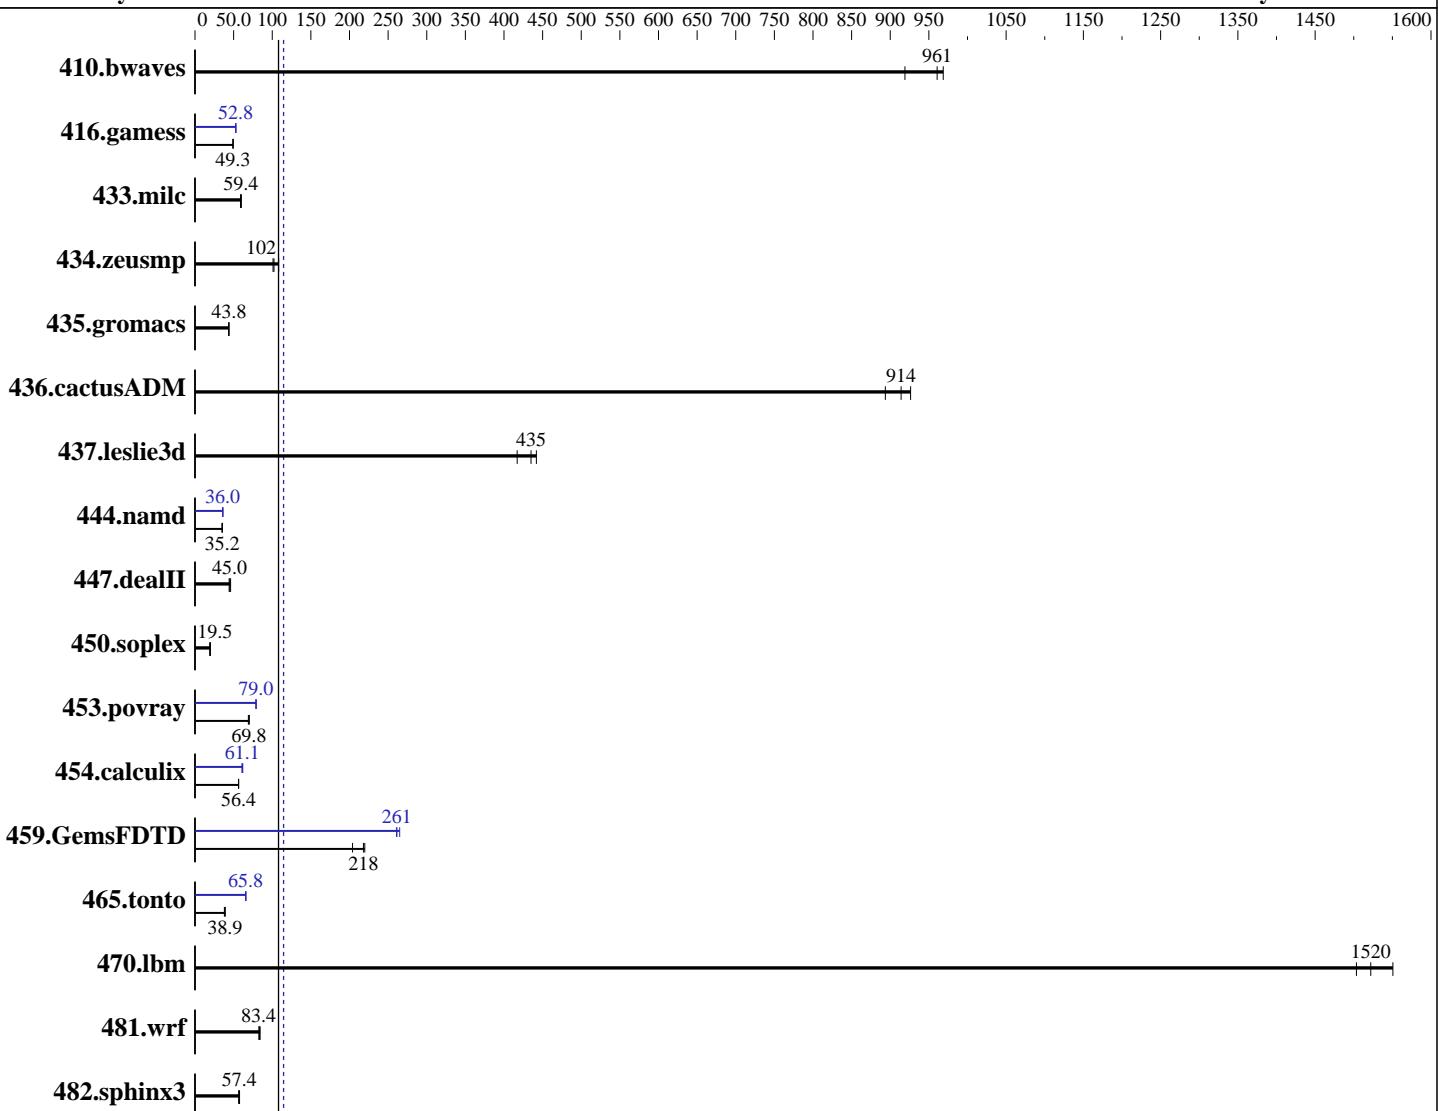

**SPECfp\_base2006 = 108**

**SPECfp2006 = 115**

## Hardware

CPU Name: Intel Xeon Platinum 8164  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 52 cores, 2 chips, 26 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: Yes  
File System: btrfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp2006 = 115**

**SPECfp\_base2006 = 108**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Jul-2017

L3 Cache: 35.75 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 960 GB SATA SSD  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	14.0	969	14.8	919	<b>14.1</b>	<b>961</b>	14.0	969	14.8	919	<b>14.1</b>	<b>961</b>
416.gamess	397	49.3	398	49.2	<b>398</b>	<b>49.3</b>	<b>371</b>	<b>52.8</b>	371	52.8	371	52.8
433.milc	153	60.0	156	58.9	<b>155</b>	<b>59.4</b>	153	60.0	156	58.9	<b>155</b>	<b>59.4</b>
434.zeusmp	<b>89.0</b>	<b>102</b>	84.0	108	90.1	101	<b>89.0</b>	<b>102</b>	84.0	108	90.1	101
435.gromacs	<b>163</b>	<b>43.8</b>	163	43.8	163	43.8	<b>163</b>	<b>43.8</b>	163	43.8	163	43.8
436.cactusADM	13.4	894	<b>13.1</b>	<b>914</b>	12.9	926	13.4	894	<b>13.1</b>	<b>914</b>	12.9	926
437.leslie3d	22.5	417	<b>21.6</b>	<b>435</b>	21.3	442	<b>22.5</b>	417	<b>21.6</b>	<b>435</b>	21.3	442
444.namd	228	35.2	<b>228</b>	<b>35.2</b>	228	35.2	223	36.0	223	36.0	<b>223</b>	<b>36.0</b>
447.dealII	<b>254</b>	<b>45.0</b>	248	46.1	259	44.2	<b>254</b>	<b>45.0</b>	248	46.1	259	44.2
450.soplex	<b>428</b>	<b>19.5</b>	436	19.1	418	20.0	<b>428</b>	<b>19.5</b>	436	19.1	418	20.0
453.povray	75.7	70.2	<b>76.3</b>	<b>69.8</b>	77.0	69.1	<b>67.4</b>	79.0	67.2	79.1	<b>67.3</b>	<b>79.0</b>
454.calculix	<b>146</b>	<b>56.4</b>	147	56.3	146	56.6	133	61.9	<b>135</b>	<b>61.1</b>	135	60.9
459.GemsFDTD	<b>48.7</b>	<b>218</b>	52.0	204	48.3	220	40.0	<b>265</b>	<b>40.6</b>	<b>261</b>	40.6	261
465.tonto	<b>253</b>	<b>38.9</b>	252	39.0	259	38.0	<b>150</b>	<b>65.8</b>	150	65.8	150	65.6
470.lbm	<b>9.03</b>	<b>1520</b>	9.14	1500	8.86	1550	<b>9.03</b>	<b>1520</b>	9.14	1500	8.86	1550
481.wrf	<b>134</b>	<b>83.4</b>	135	82.6	133	84.3	<b>134</b>	<b>83.4</b>	135	82.6	133	84.3
482.sphinx3	<b>340</b>	<b>57.4</b>	345	56.5	338	57.7	<b>340</b>	<b>57.4</b>	345	56.5	338	57.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
 Sub NUMA Cluster disabled  
 Virtualization Technology disabled  
 System Profile set to Custom  
 CPU Performance set to Maximum Performance  
 C States set to Autonomous  
 C1E disabled  
 Energy Efficient Turbo disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp2006 =**

**115**

**SPECfp\_base2006 =**

**108**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Jul-2017

## Platform Notes (Continued)

```
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /root/cpu2006-1.2_ic17u3/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-7lna Sat Jul 1 18:53:01 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
        2 "physical id"s (chips)
        104 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 26
siblings : 52
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
26 27 28 29
cache size : 36608 KB
```

```
From /proc/meminfo
MemTotal:      395642524 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-7lna 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp2006 = 115**

**SPECfp\_base2006 = 108**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Jul-2017

## Platform Notes (Continued)

run-level 3 Jul 1 12:50

```
SPEC is set to: /root/cpu2006-1.2_ic17u3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda6        btrfs 272G  9.8G  261G   4% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.6 06/22/2017

Memory:

```
4x 002C00B3002C 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz
4x 002C0632002C 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz
4x 00AD063200AD HMA84GR7AFR4N-VK 32 GB 2 rank 2666 MHz
4x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2\_ic17u3/lib/ia32:/root/cpu2006-1.2\_ic17u3/lib/intel64:/root/cpu2006-1.2\_ic17u3/sh10.2"

OMP\_NUM\_THREADS = "52"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp2006 = 115**

**SPECfp\_base2006 = 108**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Jul-2017

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp2006 = 115**

**SPECfp\_base2006 = 108**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Jul-2017

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -unroll2 -inline-level=0  
 -qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
 -auto -unroll4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp2006 = 115**

**SPECfp\_base2006 = 108**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jul-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Jul-2017

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 25 15:53:19 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 July 2017.