



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

**SPECint®2006 =**

**Not Run**

**SPECint\_base2006 =**

**81.6**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jun-2017

**Hardware Availability:** Sep-2017

**Software Availability:** May-2017

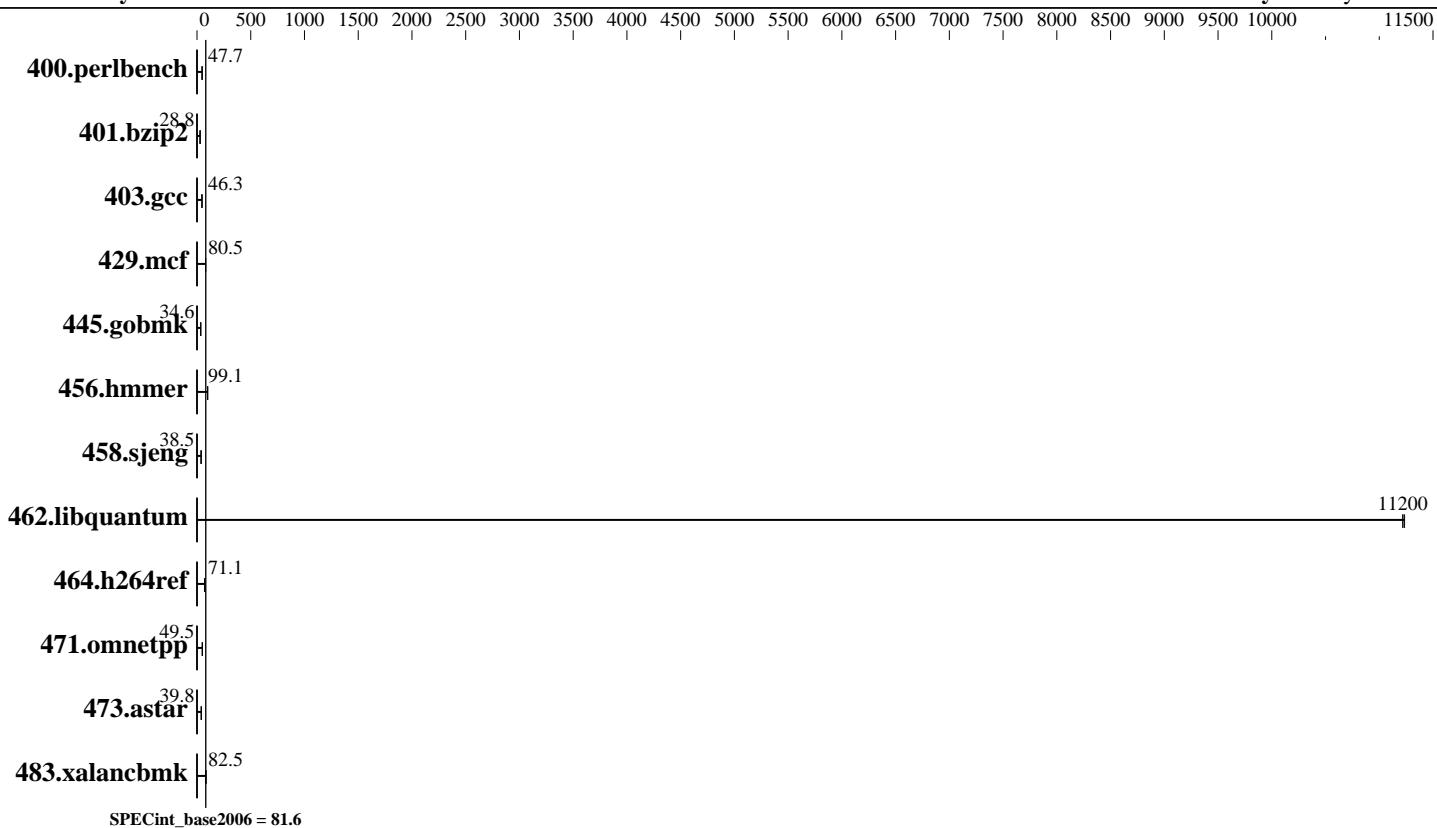

## Hardware

CPU Name: Intel Xeon Platinum 8180  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip  
 CPU(s) orderable: 1,2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 38.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 450 GB SATA SSD, RAID 0  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Compiler: Kernel 3.10.0-514.el7.x86\_64  
 C/C++: Version 17.0.4.196 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**81.6**

**CPU2006 license:** 3

**Test date:** Jun-2017

**Test sponsor:** HPE

**Hardware Availability:** Sep-2017

**Tested by:** HPE

**Software Availability:** May-2017

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>205</b>	<b>47.7</b>	205	47.6	205	47.7						
401.bzip2	334	28.9	335	28.8	<b>335</b>	<b>28.8</b>						
403.gcc	174	46.4	<b>174</b>	<b>46.3</b>	174	46.3						
429.mcf	115	79.1	113	80.5	<b>113</b>	<b>80.5</b>						
445.gobmk	303	34.6	303	34.6	<b>303</b>	<b>34.6</b>						
456.hmmer	<b>94.1</b>	<b>99.1</b>	94.1	99.2	94.3	99.0						
458.sjeng	315	38.4	314	38.6	<b>315</b>	<b>38.5</b>						
462.libquantum	1.84	11200	<b>1.85</b>	<b>11200</b>	1.85	11200						
464.h264ref	<b>311</b>	<b>71.1</b>	311	71.2	312	70.8						
471.omnetpp	125	49.9	<b>126</b>	<b>49.5</b>	127	49.4						
473.astar	176	39.8	<b>176</b>	<b>39.8</b>	176	40.0						
483.xalancbmk	83.6	82.5	<b>83.6</b>	<b>82.5</b>	83.7	82.5						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
irqbalance service stopped using: "systemctl stop irqbalance.service"

## Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled

Thermal Configuration set to Maximum Cooling

LLC Dead Line Allocation set to Disabled

XPT Prefetch set to Disabled

Workload Profile set to General Peak Frequency Compute

Energy/Performance Bias set to Maximum Performance

Sysinfo program /spec\_cpu/cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on localhost.localdomain Tue Jul 18 10:18:46 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
  2 "physical id"s (chips)
  56 "processors"
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**81.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jun-2017

**Hardware Availability:** Sep-2017

**Software Availability:** May-2017

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 28
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
cache size : 39424 KB
```

From /proc/meminfo

```
MemTotal:      197569796 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.3 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.3"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 18 10:07

SPEC is set to: /spec\_cpu/cpu2006

```
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   442G  81G  362G  19%  /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 06/08/2017

Memory:

```
24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**81.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jun-2017

**Hardware Availability:** Sep-2017

**Software Availability:** May-2017

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/spec\_cpu/cpu2006/lib/ia32:/spec\_cpu/cpu2006/lib/intel64:/spec\_cpu/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "52"

Binaries compiled on a system with 2x Intel Xeon Platinum 8180 CPU + 384GB RAM  
memory using Redhat Enterprise Linux 7.3

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hammer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32 -complex-limited-range -qopt-prefetch-issue-excl-hint  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/spec\_cpu/cpu2006/sh10.2 -lsmartheap64



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**81.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Jun-2017

**Hardware Availability:** Sep-2017

**Software Availability:** May-2017

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HPE-Compiler-Flags-Intel-V1.2-HSW-revJ.html>  
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HPE-Compiler-Flags-Intel-V1.2-HSW-revJ.xml>  
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 25 15:53:49 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 July 2017.