



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Inspur Corporation

**SPECfp®2006 = 101**

### Inspur NF5270M4 (Intel Xeon E5-2620 v4)

**SPECfp\_base2006 = 94.2**

CPU2006 license: 3358


Test date: Jul-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Apr-2017

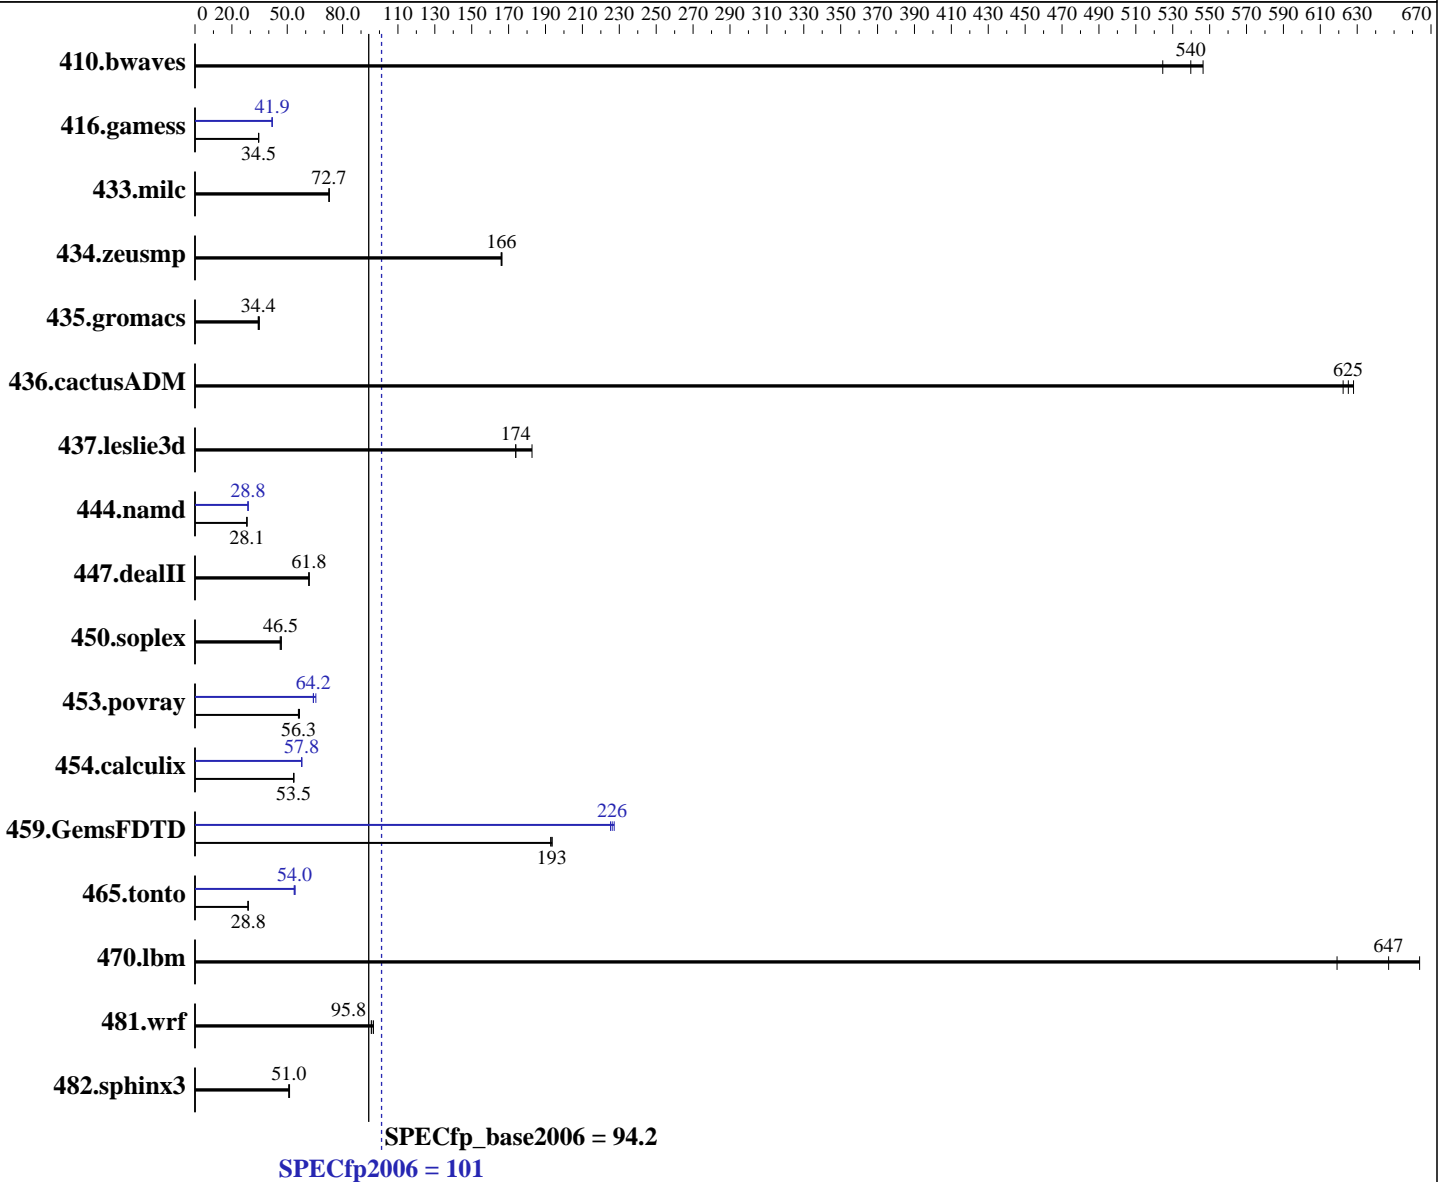

**Hardware**

CPU Name: Intel Xeon E5-2620 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECfp2006 = **101**

## Inspur NF5270M4 (Intel Xeon E5-2620 v4)

SPECfp\_base2006 = **94.2**

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jul-2017

Hardware Availability: Apr-2016

Software Availability: Apr-2017

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)  
 Disk Subsystem: 1 x 900 GB SATA SSD  
 Other Hardware: None

System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	25.9	525	<b>25.2</b>	<b>540</b>	24.9	546	25.9	525	<b>25.2</b>	<b>540</b>	24.9	546
416.gamess	567	34.6	568	34.5	<b>568</b>	<b>34.5</b>	<b>468</b>	<b>41.9</b>	468	41.9	469	41.8
433.milc	126	72.8	126	72.6	<b>126</b>	<b>72.7</b>	126	72.8	126	72.6	<b>126</b>	<b>72.7</b>
434.zeusmp	54.8	166	<b>54.8</b>	<b>166</b>	54.7	166	54.8	166	<b>54.8</b>	<b>166</b>	54.7	166
435.gromacs	208	34.3	205	34.9	<b>208</b>	<b>34.4</b>	208	34.3	205	34.9	<b>208</b>	<b>34.4</b>
436.cactusADM	<b>19.1</b>	<b>625</b>	19.2	622	19.0	628	<b>19.1</b>	<b>625</b>	19.2	622	19.0	628
437.leslie3d	54.1	174	51.5	183	<b>54.1</b>	<b>174</b>	54.1	174	51.5	183	<b>54.1</b>	<b>174</b>
444.namd	285	28.2	285	28.1	<b>285</b>	<b>28.1</b>	279	28.7	<b>279</b>	<b>28.8</b>	279	28.8
447.dealII	<b>185</b>	<b>61.8</b>	185	61.7	185	61.9	<b>185</b>	<b>61.8</b>	185	61.7	185	61.9
450.soplex	178	46.8	181	46.2	<b>179</b>	<b>46.5</b>	178	46.8	181	46.2	<b>179</b>	<b>46.5</b>
453.povray	<b>94.6</b>	<b>56.3</b>	94.9	56.1	93.9	56.6	82.9	64.2	81.2	65.5	<b>82.9</b>	<b>64.2</b>
454.calculix	<b>154</b>	<b>53.5</b>	154	53.6	154	53.5	143	57.8	<b>143</b>	<b>57.8</b>	143	57.9
459.GemsFDTD	54.8	194	<b>54.9</b>	<b>193</b>	55.0	193	47.1	225	46.7	227	<b>46.9</b>	<b>226</b>
465.tonto	343	28.7	<b>341</b>	<b>28.8</b>	341	28.8	<b>182</b>	<b>54.0</b>	183	53.8	181	54.3
470.lbm	20.7	664	<b>21.2</b>	<b>647</b>	22.2	619	20.7	664	<b>21.2</b>	<b>647</b>	22.2	619
481.wrf	<b>117</b>	<b>95.8</b>	115	96.7	117	95.6	<b>117</b>	<b>95.8</b>	115	96.7	117	95.6
482.sphinx3	383	50.8	380	51.3	<b>382</b>	<b>51.0</b>	383	50.8	380	51.3	<b>382</b>	<b>51.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS and OS configuration:  
 SCALING\_GOVERNOR set to Performance  
 Hardware Prefetch set to Disable  
 VT Support set to Disable  
 ClE Support set to Disable  
 Sysinfo program /home/CPU2006/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on localhost.localdomain Fri Jul 21 08:14:05 2017

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp2006 = 101

Inspur NF5270M4 (Intel Xeon E5-2620 v4)

SPECfp\_base2006 = 94.2

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jul-2017

Hardware Availability: Apr-2016

Software Availability: Apr-2017

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 8
  siblings     : 16
  physical 0:  cores 0 1 2 3 4 5 6 7
  physical 1:  cores 0 1 2 3 4 5 6 7
cache size     : 20480 KB

```

```

From /proc/meminfo
MemTotal:      263850884 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 5 Jul 19 23:18

```

SPEC is set to: /home/CPU2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   877G  97G  780G  12% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp2006 = 101

Inspur NF5270M4 (Intel Xeon E5-2620 v4)

SPECfp\_base2006 = 94.2

CPU2006 license: 3358

Test date: Jul-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Apr-2017

## Platform Notes (Continued)

BIOS American Megatrends Inc. 4.1.11 09/07/2016

Memory:

8x NO DIMM NO DIMM

16x Samsung M393A2K43BB1-CNC 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/CPU2006/lib/ia32:/home/CPU2006/lib/intel64:/home/CPU2006/sh10.2"

OMP\_NUM\_THREADS = "32"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

450.soplex: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp2006 = 101

Inspur NF5270M4 (Intel Xeon E5-2620 v4)

SPECfp\_base2006 = 94.2

CPU2006 license: 3358

Test date: Jul-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Apr-2017

## Base Portability Flags (Continued)

```
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

```
C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

## Peak Compiler Invocation

```
C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp2006 = 101

Inspur NF5270M4 (Intel Xeon E5-2620 v4)

SPECfp\_base2006 = 94.2

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jul-2017

Hardware Availability: Apr-2016

Software Availability: Apr-2017

## Peak Optimization Flags

### C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp2006 = 101

Inspur NF5270M4 (Intel Xeon E5-2620 v4)

SPECfp\_base2006 = 94.2

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jul-2017

Hardware Availability: Apr-2016

Software Availability: Apr-2017

## Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Aug 8 15:41:38 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 August 2017.