SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6320 (Intel Xeon E5-2630 v4, 2.20 GHz)

SPECint®_rate2006 = 839

SPECint_rate_base2006 = 800

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2017
Hardware Availability: Jun-2016
Software Availability: Mar-2016

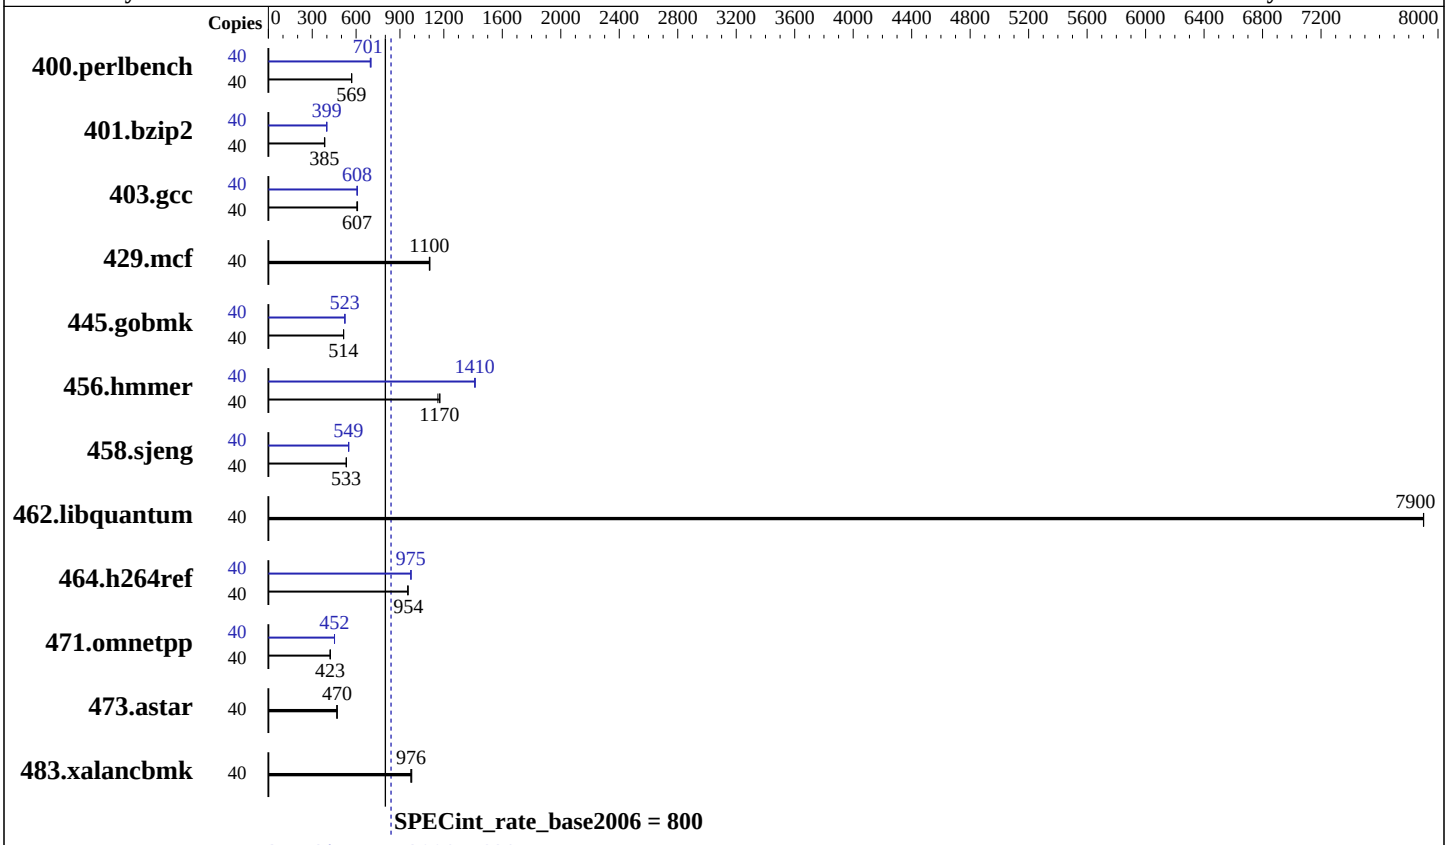

Hardware

CPU Name:	Intel Xeon E5-2630 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.10 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (8 x 32 GB 2Rx8 PC4-2400T-R, running at 2133 MT/s)
Disk Subsystem:	1 TB SATA 7.2K
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP3 (x86_64) 4.4.70-2-default
Compiler:	C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6320 (Intel Xeon E5-2630 v4, 2.20 GHz)

SPECint_rate2006 = 839

SPECint_rate_base2006 = 800

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2017
Hardware Availability: Jun-2016
Software Availability: Mar-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	**686**	**569**	685	570	687	569	40	**558**	**701**	557	701	561	697
401.bzip2	40	1007	383	1001	386	**1003**	**385**	40	966	400	968	399	**968**	**399**
403.gcc	40	531	606	**531**	**607**	528	610	40	531	606	529	609	**529**	**608**
429.mcf	40	330	1100	331	1100	**331**	**1100**	40	330	1100	331	1100	**331**	**1100**
445.gobmk	40	816	514	815	515	**816**	**514**	40	801	524	**802**	**523**	803	523
456.hmmer	40	322	1160	318	1170	**319**	**1170**	40	**264**	**1410**	264	1410	265	1410
458.sjeng	40	907	534	908	533	**908**	**533**	40	881	550	882	549	**882**	**549**
462.libquantum	40	105	7900	**105**	**7900**	105	7900	40	105	7900	**105**	**7900**	105	7900
464.h264ref	40	928	953	**928**	**954**	926	956	40	907	976	**908**	**975**	908	975
471.omnetpp	40	591	423	591	423	**591**	**423**	40	553	452	**553**	**452**	553	452
473.astar	40	600	468	**597**	**470**	597	471	40	600	468	**597**	**470**	597	471
483.xalancbmk	40	281	981	**283**	**976**	283	975	40	281	981	**283**	**976**	283	975

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology disabled
System Profile set to custom
CPU Performance set to Hardware P States
C States set to Autonomous
C1E disabled
Energy Efficient Turbo disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Balanced Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-1ajq Thu Jul 13 15:33:15 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2630 v4@ 2.20GHz
      2 "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
      physical 1: cores 0 1 2 3 4 8 9 10 11 12
   cache size : 25600 KB

From /proc/meminfo
   MemTotal:       264037444 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 3
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP3"
      VERSION_ID="12.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
   Linux linux-1ajq 4.4.70-2-default #1 SMP Wed Jun 7 15:12:06 UTC 2017
   (4502c76) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 13 15:32

SPEC is set to: /root/cpu2006-1.2
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/sda1      btrfs  864G  7.8G  854G   1% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.
```

Continued on next page

Platform Notes (Continued)

```
    BIOS Dell Inc. 2.4.2 01/09/2017
    Memory:
     8x 002C00B3002C 36ASF4G72PZ-2G3B1 32 GB 2 rank 2400 MHz, configured at 2133
     MHz
     8x Not Specified Not Specified

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

  Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB
  memory using RedHat EL 7.2 glibc 2.17
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
    400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
      401.bzip2: -D_FILE_OFFSET_BITS=64
        403.gcc: -D_FILE_OFFSET_BITS=64
        429.mcf: -D_FILE_OFFSET_BITS=64
      445.gobmk: -D_FILE_OFFSET_BITS=64
      456.hmmer: -D_FILE_OFFSET_BITS=64
      458.sjeng: -D_FILE_OFFSET_BITS=64
  462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
    464.h264ref: -D_FILE_OFFSET_BITS=64
    471.omnetpp: -D_FILE_OFFSET_BITS=64
      473.astar: -D_FILE_OFFSET_BITS=64
  483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 8 15:42:30 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2017.