



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Platinum 8160,  
2.10GHz

**SPECfp®\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1560**

CPU2006 license: 19


**Test date:** Aug-2017

**Test sponsor:** Fujitsu

**Hardware Availability:** Jul-2017

**Tested by:** Fujitsu

**Software Availability:** Apr-2017

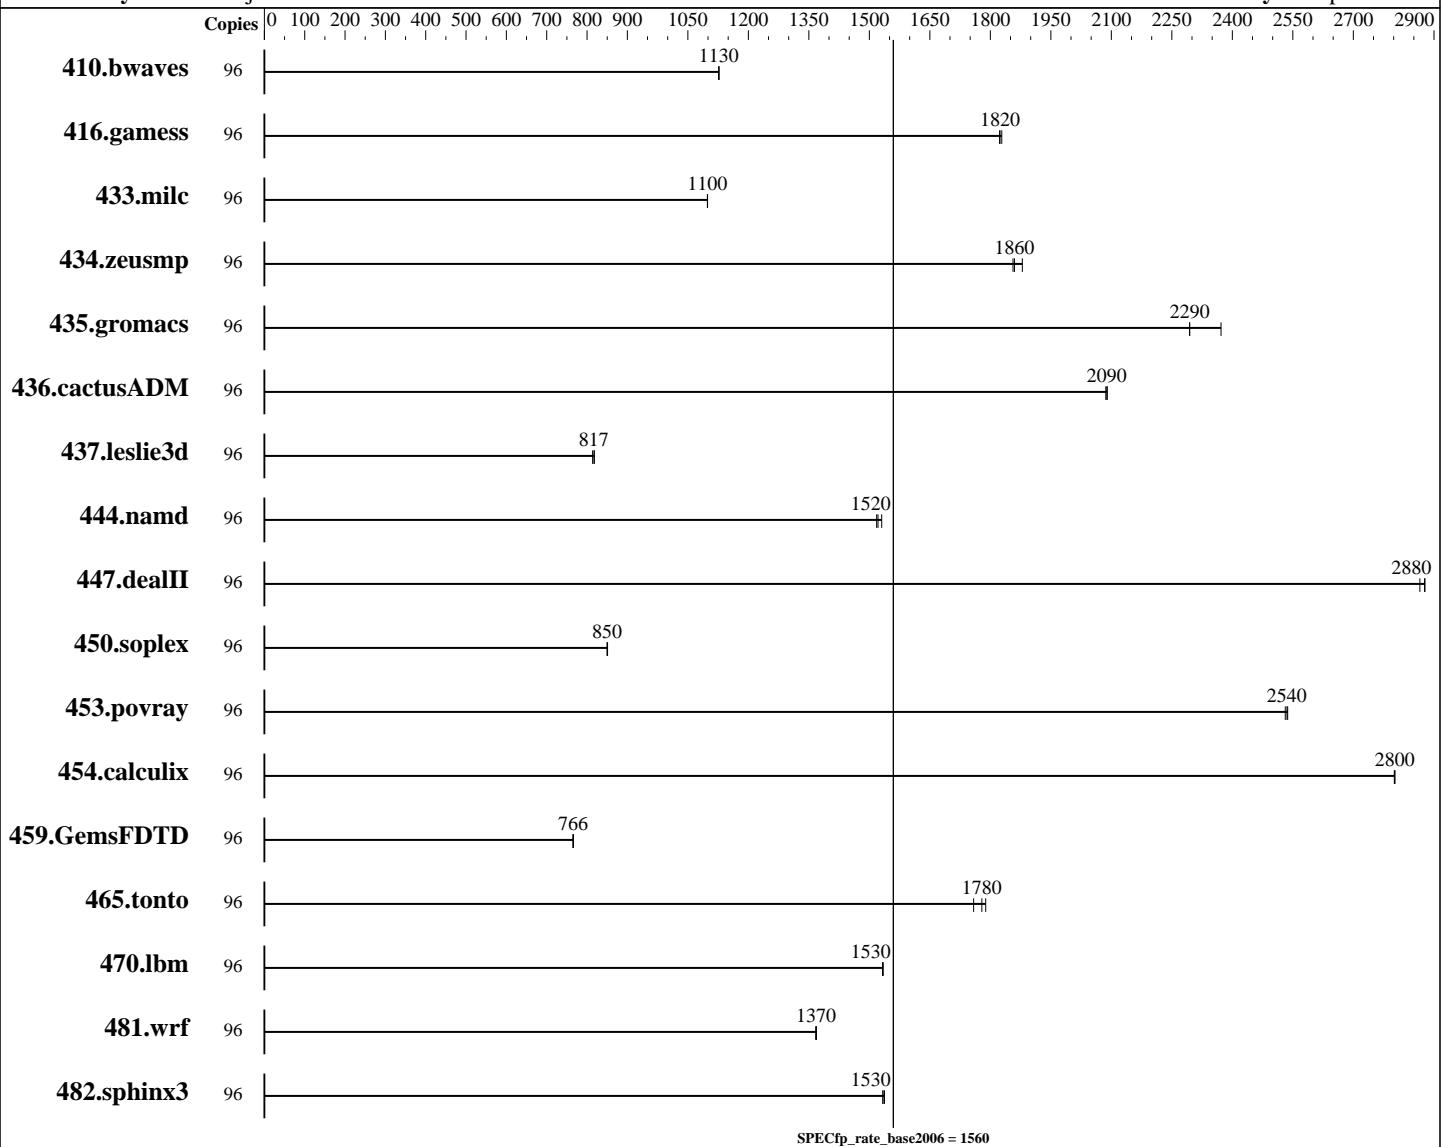

## Hardware

CPU Name: Intel Xeon Platinum 8160  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 48 cores, 2 chips, 24 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: No  
File System: tmpfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Platinum 8160,  
2.10GHz

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1560**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

L3 Cache: 33 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 752 GB tmpfs  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	96	1158	1130	<b>1158</b>	<b>1130</b>	1158	1130									
416.gamess	96	<b>1031</b>	<b>1820</b>	1028	1830	1031	1820									
433.milc	96	802	1100	802	1100	<b>802</b>	<b>1100</b>									
434.zeusmp	96	471	1860	465	1880	<b>470</b>	<b>1860</b>									
435.gromacs	96	<b>299</b>	<b>2290</b>	299	2290	289	2370									
436.cactusADM	96	549	2090	<b>549</b>	<b>2090</b>	550	2090									
437.leslie3d	96	1109	814	<b>1104</b>	<b>817</b>	1103	818									
444.namd	96	507	1520	503	1530	<b>506</b>	<b>1520</b>									
447.dealII	96	383	2860	382	2880	<b>382</b>	<b>2880</b>									
450.soplex	96	<b>942</b>	<b>850</b>	942	850	941	851									
453.povray	96	<b>201</b>	<b>2540</b>	201	2540	202	2530									
454.calculix	96	<b>283</b>	<b>2800</b>	283	2800	283	2800									
459.GemsFDTD	96	<b>1330</b>	<b>766</b>	1329	766	1331	765									
465.tonto	96	528	1790	537	1760	<b>531</b>	<b>1780</b>									
470.lbm	96	<b>860</b>	<b>1530</b>	860	1530	861	1530									
481.wrf	96	783	1370	784	1370	<b>784</b>	<b>1370</b>									
482.sphinx3	96	<b>1220</b>	<b>1530</b>	1217	1540	1220	1530									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Kernel Boot Parameter set with : nohz\_full=1-95  
 Turbo mode set with :  
 cpupower -c all frequency-set -g performance  
 Tmpfs filesystem can be set with:  
 mkdir /home/memory  
 mount -t tmpfs -o size=752g,rw tmpfs /home/memory  
 Process tunning setting:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Platinum 8160,  
2.10GHz

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1560**

**CPU2006 license:** 19

**Test date:** Aug-2017

**Test sponsor:** Fujitsu

**Hardware Availability:** Jul-2017

**Tested by:** Fujitsu

**Software Availability:** Apr-2017

## Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

## Platform Notes

BIOS configuration:

```
Link Frequency Select = 10.4 GT/s
HWPM Support = Disabled
Intel Virtualization Technology = Disabled
Sub NUMA Clustering = Enabled
IMC Interleaving = 1-way
LLC Dead Line Alloc = Disabled
Stale AtoS = Enabled
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-zz9i Mon Aug 14 15:16:29 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
        2 "physical id"s (chips)
        96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 24
        siblings : 48
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
        27 28 29
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
        27 28 29
cache size : 33792 KB
```

```
From /proc/meminfo
MemTotal:      394407124 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Platinum 8160,  
2.10GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1560

CPU2006 license: 19

Test date: Aug-2017

Test sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Apr-2017

## Platform Notes (Continued)

```
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-zz9i 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 14 02:36

```
SPEC is set to: /home/memory/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  752G  4.1G  748G   1% /home/memory
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.4.1 for D3383-A1x
06/19/2017
Memory:
 24x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64:/home/memory/speccpu/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Platinum 8160,  
2.10GHz

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1560**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Base Compiler Invocation

C benchmarks:  
`icc -m64`

C++ benchmarks:  
`icpc -m64`

Fortran benchmarks:  
`ifort -m64`

Benchmarks using both Fortran and C:  
`icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3`

C++ benchmarks:  
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3`

Fortran benchmarks:  
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Platinum 8160,  
2.10GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1560

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 13:42:57 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 September 2017.