



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp®_rate2006 = 1220

Altos R360 F4 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1190

CPU2006 license: 97


Test date: Sep-2017

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2017

Tested by: Acer Incorporated

Software Availability: Apr-2017

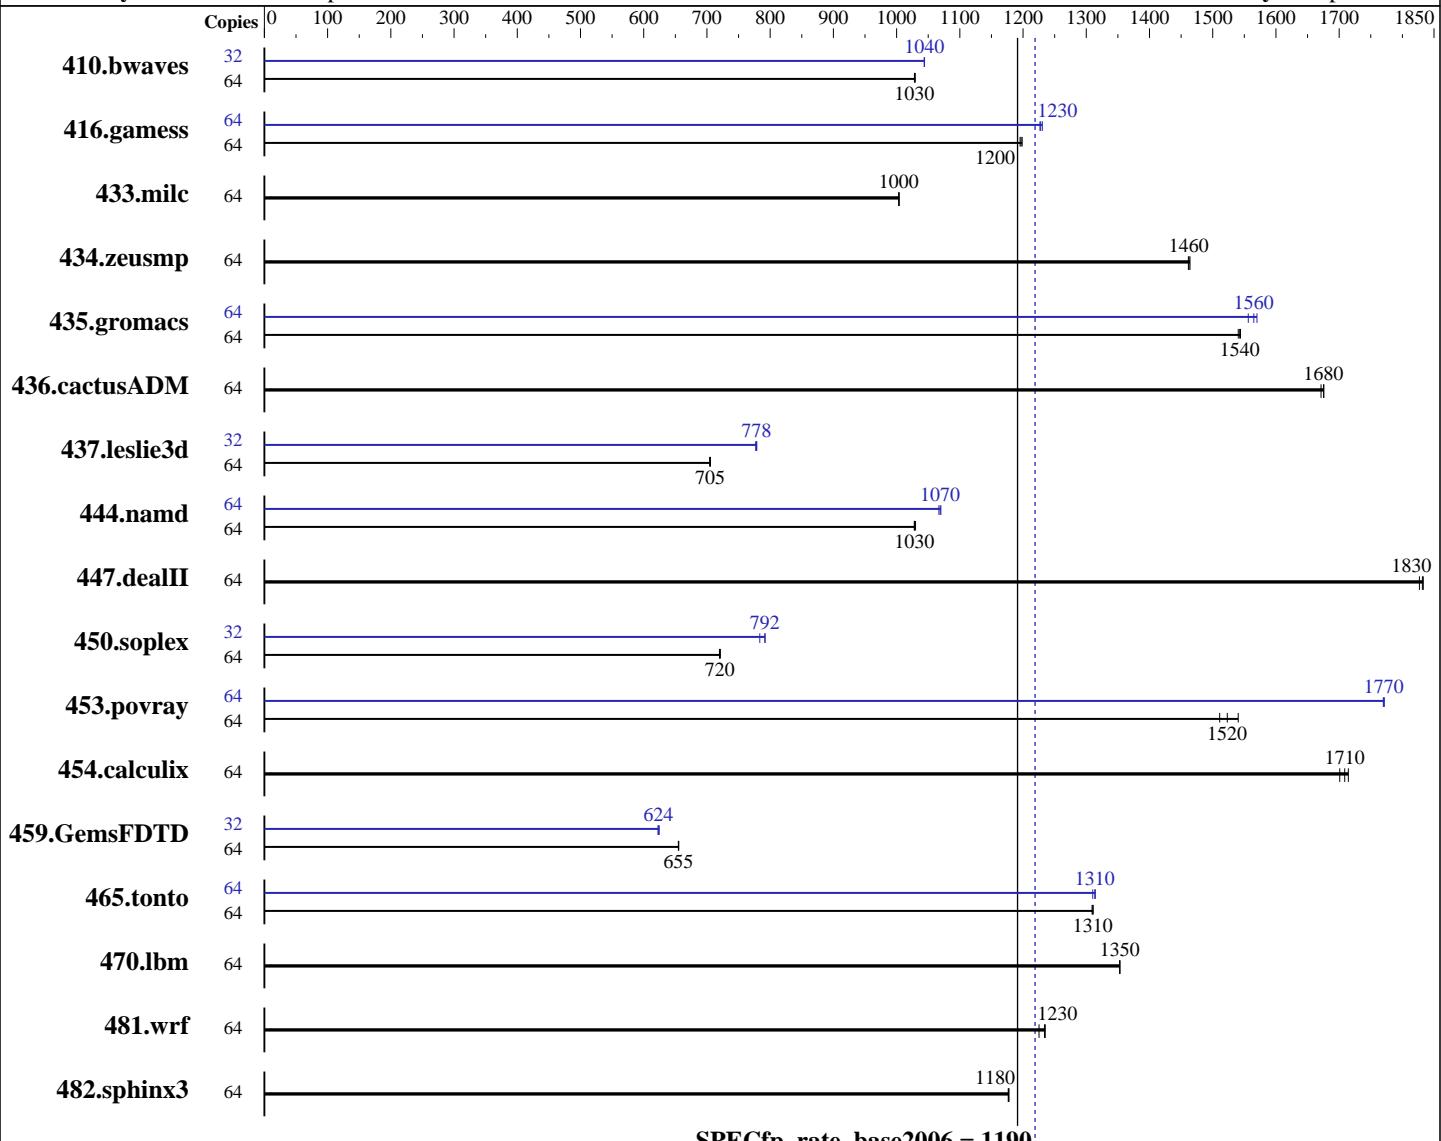

SPECfp_rate_base2006 = 1190

SPECfp_rate2006 = 1220

Hardware

CPU Name: Intel Xeon Gold 6130
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: btrfs
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 1220

Altos R360 F4 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1190

CPU2006 license: 97

Test date: Sep-2017

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2017

Tested by: Acer Incorporated

Software Availability: Apr-2017

L3 Cache: 22 MB I+D on chip per chip
 Other Cache: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
 Disk Subsystem: 1 x 1000 GB, SATA 7200 RPM
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	845	1030	846	1030	846	1030	32	416	1040	417	1040	417	1040
416.gamess	64	1048	1200	1047	1200	1045	1200	64	1022	1230	1018	1230	1021	1230
433.milc	64	585	1000	585	1000	585	1000	64	585	1000	585	1000	585	1000
434.zeusmp	64	398	1460	398	1460	398	1460	64	398	1460	398	1460	398	1460
435.gromacs	64	297	1540	296	1540	296	1540	64	294	1560	291	1570	292	1560
436.cactusADM	64	456	1680	458	1670	457	1680	64	456	1680	458	1670	457	1680
437.leslie3d	64	853	705	854	704	853	706	32	386	779	386	778	387	777
444.namd	64	498	1030	499	1030	499	1030	64	481	1070	480	1070	480	1070
447.dealII	64	399	1830	401	1830	400	1830	64	399	1830	401	1830	400	1830
450.soplex	64	741	720	742	720	740	721	32	341	784	337	792	337	792
453.povray	64	225	1510	224	1520	221	1540	64	192	1770	192	1770	192	1770
454.calculix	64	308	1710	310	1700	309	1710	64	308	1710	310	1700	309	1710
459.GemsFDTD	64	1037	655	1036	655	1037	655	32	544	624	545	623	544	624
465.tonto	64	480	1310	481	1310	481	1310	64	479	1310	479	1310	481	1310
470.lbm	64	650	1350	650	1350	650	1350	64	650	1350	650	1350	650	1350
481.wrf	64	583	1230	579	1240	579	1230	64	583	1230	579	1240	579	1230
482.sphinx3	64	1060	1180	1060	1180	1059	1180	64	1060	1180	1060	1180	1059	1180

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
 CPU Power and Performance Policy set to Performance
 IMC set to 1-way interleaving

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 1220

Altos R360 F4 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1190

CPU2006 license: 97

Test date: Sep-2017

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2017

Tested by: Acer Incorporated

Software Availability: Apr-2017

Platform Notes (Continued)

```
Sub_NUMA Cluster set to enabled
Set Fan Profile set to Performance
Sysinfo program /usr/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-4jae Thu Sep 14 23:29:25 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
        2 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 16
        siblings : 32
        physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
        physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB
```

```
From /proc/meminfo
MemTotal:      791025268 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-4jae 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 1220

Altos R360 F4 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1190

CPU2006 license: 97

Test date: Sep-2017

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2017

Tested by: Acer Incorporated

Software Availability: Apr-2017

Platform Notes (Continued)

run-level 3 Sep 14 12:14

SPEC is set to: /usr/cpu2006

Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 btrfs 930G 232G 697G 25% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.00.01.0004.071220170215 07/12/2017

Memory:

24x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2006/lib/ia32:/usr/cpu2006/lib/intel64:/usr/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Altos R360 F4 and Altos R380 F4 are electronically equivalent.

This result was measured on Altos R380 F4.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 1220

Altos R360 F4 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1190

CPU2006 license: 97

Test date: Sep-2017

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2017

Tested by: Acer Incorporated

Software Availability: Apr-2017

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 1220

Altos R360 F4 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1190

CPU2006 license: 97

Test date: Sep-2017

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2017

Tested by: Acer Incorporated

Software Availability: Apr-2017

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated	SPECfp_rate2006 = 1220
Altos R360 F4 (Intel Xeon Gold 6130)	SPECfp_rate_base2006 = 1190
CPU2006 license: 97	Test date: Sep-2017
Test sponsor: Acer Incorporated	Hardware Availability: Oct-2017
Tested by: Acer Incorporated	Software Availability: Apr-2017

Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>
<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.3-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>
<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.3-revC.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 1220

Altos R360 F4 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1190

CPU2006 license: 97

Test date: Sep-2017

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2017

Tested by: Acer Incorporated

Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Oct 10 11:46:36 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2017.