



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECint®_rate2006 = 3190

ThinkSystem SR850
(2.10 GHz, Intel Xeon Gold 6130)

SPECint_rate_base2006 = 2990

CPU2006 license: 9017


Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

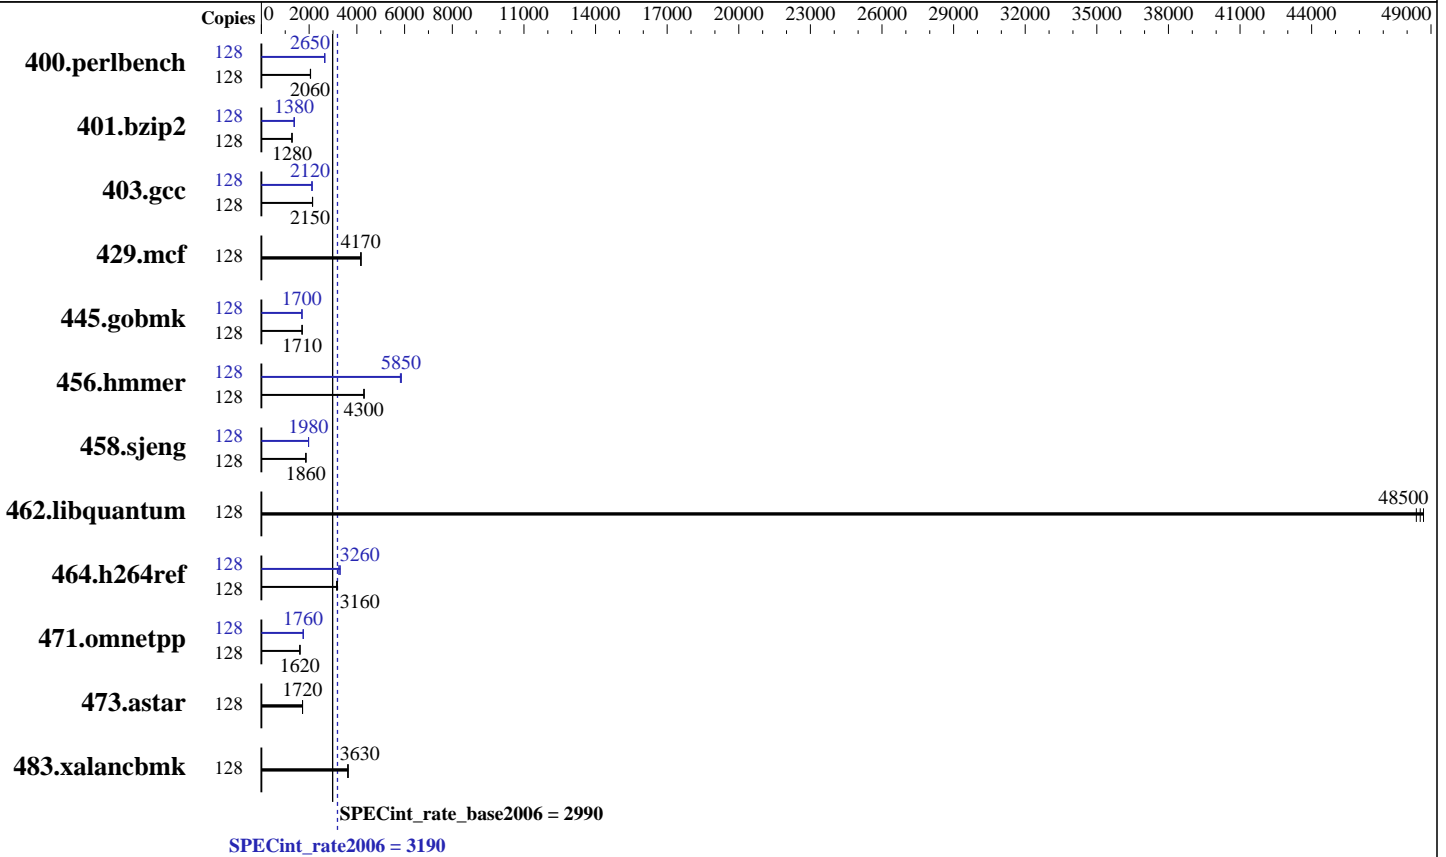

Hardware

CPU Name: Intel Xeon Gold 6130
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 22 MB I+D on chip per chip
 Other Cache: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
 Disk Subsystem: 1 x 800 GB SATA SSD
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 17.0.1.132 of Intel C/C++ Compiler for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECint_rate2006 = 3190

ThinkSystem SR850
(2.10 GHz, Intel Xeon Gold 6130)

SPECint_rate_base2006 = 2990

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	610	2050	607	2060	<u>607</u>	<u>2060</u>	128	471	2650	<u>471</u>	<u>2650</u>	471	2650
401.bzip2	128	961	1280	965	1280	<u>962</u>	<u>1280</u>	128	<u>897</u>	<u>1380</u>	901	1370	894	1380
403.gcc	128	482	2140	<u>480</u>	<u>2150</u>	480	2150	128	488	2110	<u>485</u>	<u>2120</u>	484	2130
429.mcf	128	280	4170	279	4180	<u>280</u>	<u>4170</u>	128	280	4170	279	4180	<u>280</u>	<u>4170</u>
445.gobmk	128	786	1710	<u>786</u>	<u>1710</u>	788	1700	128	789	1700	<u>790</u>	<u>1700</u>	791	1700
456.hammer	128	<u>278</u>	<u>4300</u>	278	4300	277	4310	128	205	5820	204	5860	<u>204</u>	<u>5850</u>
458.sjeng	128	<u>831</u>	<u>1860</u>	831	1860	830	1870	128	783	1980	<u>783</u>	<u>1980</u>	784	1970
462.libquantum	128	54.5	48700	<u>54.6</u>	<u>48500</u>	54.8	48400	128	54.5	48700	<u>54.6</u>	<u>48500</u>	54.8	48400
464.h264ref	128	898	3150	889	3190	<u>896</u>	<u>3160</u>	128	872	3250	857	3310	<u>870</u>	<u>3260</u>
471.omnetpp	128	496	1610	<u>495</u>	<u>1620</u>	495	1620	128	<u>456</u>	<u>1760</u>	456	1760	456	1750
473.astar	128	<u>521</u>	<u>1720</u>	520	1730	522	1720	128	<u>521</u>	<u>1720</u>	520	1730	522	1720
483.xalancbmk	128	244	3620	<u>244</u>	<u>3630</u>	243	3640	128	244	3620	<u>244</u>	<u>3630</u>	243	3640

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

Choose Operating Mode set to Maximum Performance
 Execute Disable Bit set to Disable
 DCU Streamer Prefetcher set to Disable
 Intel Virtualization Technology set to Disable
 Stale AtoS set to Enable
 LLC dead line alloc set to Disable
 SNC set to Enable
 Sysinfo program /home/cpu2006-1.2-ic17.0u1/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on Electron-node-02 Fri Sep 8 17:58:34 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECint_rate2006 = 3190

ThinkSystem SR850
(2.10 GHz, Intel Xeon Gold 6130)

SPECint_rate_base2006 = 2990

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 4 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 16
  siblings  : 32
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB

```

From /proc/meminfo

```

MemTotal:      1584975072 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
 SUSE Linux Enterprise Server 12 (x86_64)
 VERSION = 12
 PATCHLEVEL = 2
 # This file is deprecated and will be removed in a future service pack or
 release.
 # Please check /etc/os-release for details about this release.
os-release:
 NAME="SLES"
 VERSION="12-SP2"
 VERSION_ID="12.2"
 PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
 ID="sles"
 ANSI_COLOR="0;32"
 CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

```

Linux Electron-node-02 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 8 17:54

SPEC is set to: /home/cpu2006-1.2-ic17.0u1

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   688G   70G  619G  11% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECint_rate2006 = 3190

ThinkSystem SR850
(2.10 GHz, Intel Xeon Gold 6130)

SPECint_rate_base2006 = 2990

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Platform Notes (Continued)

BIOS Lenovo -[TEE113J-1.00]- 06/03/2017

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0u1/lib/ia32:/home/cpu2006-1.2-ic17.0u1/lib/intel64:/home/cpu2006-1.2-ic17.0u1/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECint_rate2006 = 3190

ThinkSystem SR850
(2.10 GHz, Intel Xeon Gold 6130)

SPECint_rate_base2006 = 2990

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECint_rate2006 = 3190

ThinkSystem SR850
(2.10 GHz, Intel Xeon Gold 6130)

SPECint_rate_base2006 = 2990

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Peak Portability Flags (Continued)

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX512 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto-ilp32
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)
-qopt-ra-region-strategy=block
-qopt-mem-layout-trans=3 -Wl,-z,muldefs
-L/sh10.2 -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECint_rate2006 = 3190

ThinkSystem SR850
(2.10 GHz, Intel Xeon Gold 6130)

SPECint_rate_base2006 = 2990

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 4 12:39:17 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 October 2017.