SPEC® CINT2006 Result

Huawei

Kunlun 9008 (Intel Xeon E7-4809 v4)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 2110

CPU2006 license:	3175	**Test date:**	Jun-2017
Test sponsor:	Huawei	**Hardware Availability:**	Jan-2016
Tested by:	Huawei	**Software Availability:**	Sep-2016

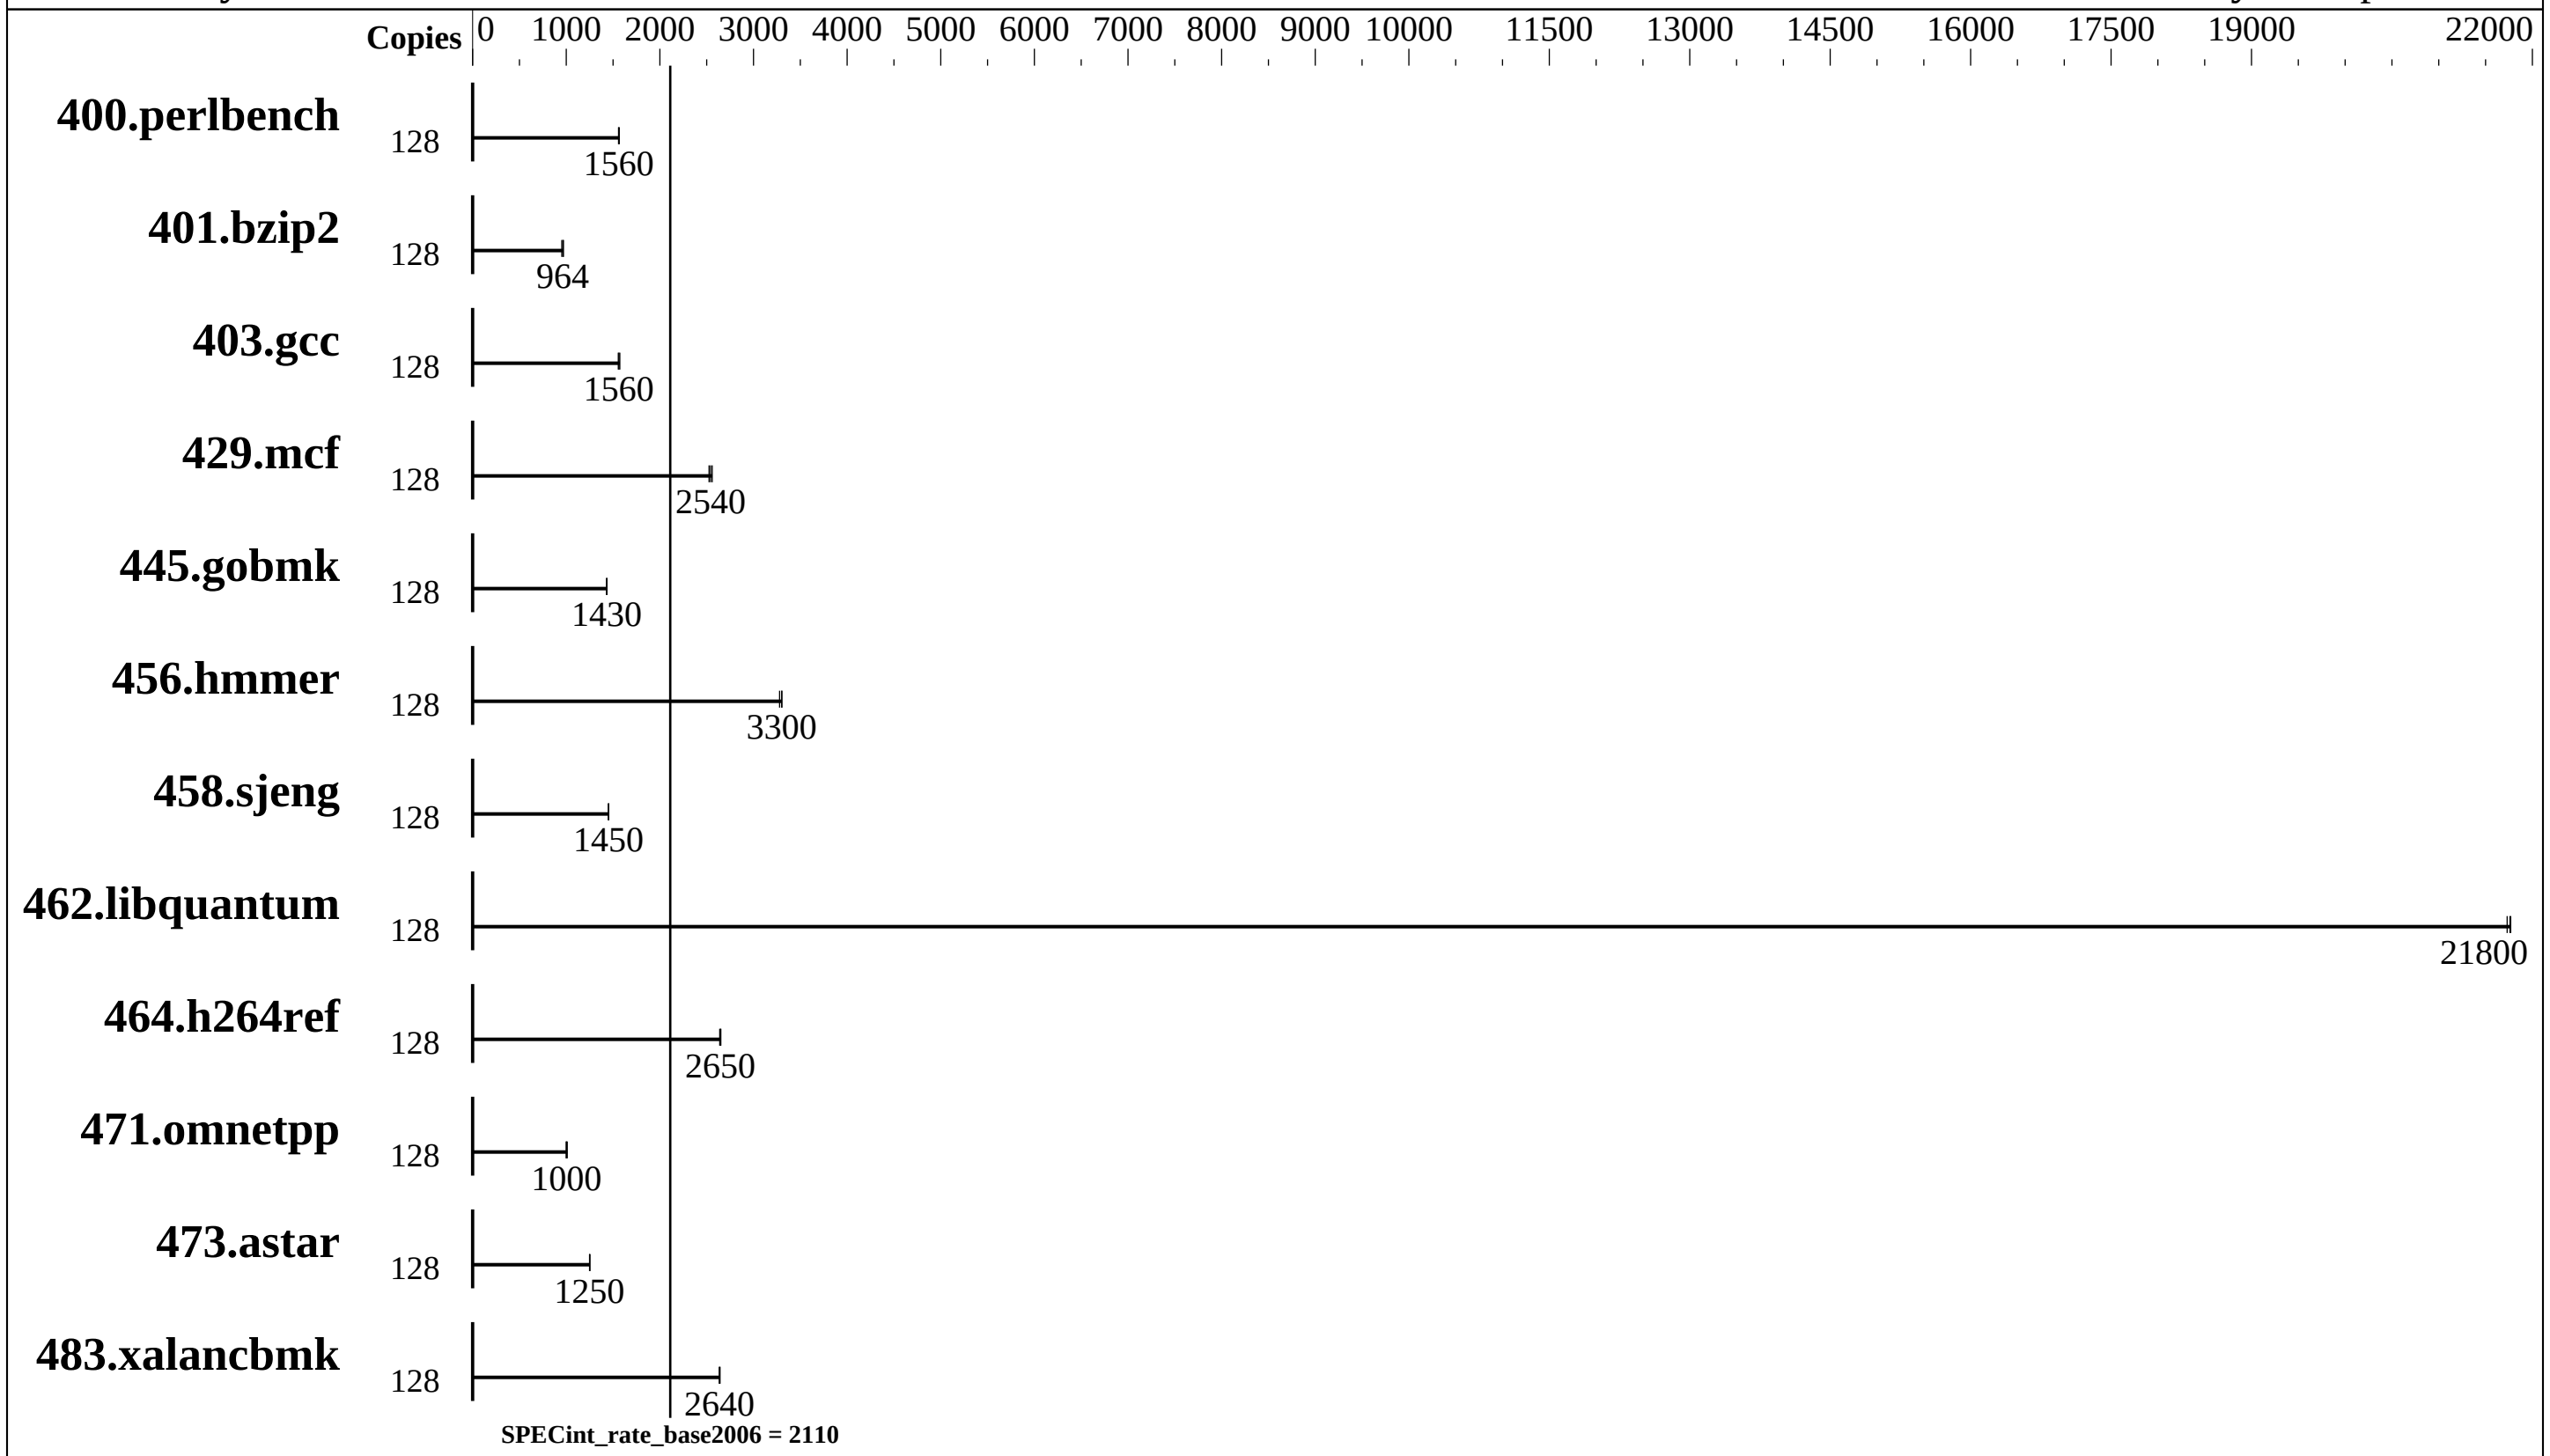

Hardware

CPU Name:	Intel Xeon E7-4809 v4
CPU Characteristics:	
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	64 cores, 8 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	4,8 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
Disk Subsystem:	2 x 600 GB SAS, 10K RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP1 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 5 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Huawei

Kunlun 9008 (Intel Xeon E7-4809 v4)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 2110

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jun-2017
Hardware Availability: Jan-2016
Software Availability: Sep-2016

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	128	799	1570	**801**	**1560**	802	1560							
401.bzip2	128	1297	952	1273	970	**1281**	**964**							
403.gcc	128	**659**	**1560**	655	1570	662	1560							
429.mcf	128	462	2530	**459**	**2540**	456	2560							
445.gobmk	128	**938**	**1430**	938	1430	936	1430							
456.hmmer	128	362	3300	364	3280	**362**	**3300**							
458.sjeng	128	**1067**	**1450**	1066	1450	1067	1450							
462.libquantum	128	122	21700	**122**	**21800**	122	21800							
464.h264ref	128	1073	2640	**1070**	**2650**	1069	2650							
471.omnetpp	128	800	1000	792	1010	**798**	**1000**							
473.astar	128	719	1250	718	1250	**719**	**1250**							
483.xalancbmk	128	**335**	**2640**	334	2640	335	2630							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Turbo mode set with:
 cpupower -c all frequency-set -g performance
```

Platform Notes

```
Sysinfo program /home/spec/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-v9m3 Thu Jun 15 20:22:01 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-4809 v4 @ 2.10GHz
      8 "physical id"s (chips)
      128 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
```

Continued on next page

Platform Notes (Continued)

```
          cpu cores : 8
          siblings  : 16
          physical 0: cores 0 1 2 3 4 5 6 7
          physical 1: cores 0 1 2 3 4 5 6 7
          physical 2: cores 0 1 2 3 4 5 6 7
          physical 3: cores 0 1 2 3 4 5 6 7
          physical 4: cores 0 1 2 3 4 5 6 7
          physical 5: cores 0 1 2 3 4 5 6 7
          physical 6: cores 0 1 2 3 4 5 6 7
          physical 7: cores 0 1 2 3 4 5 6 7
       cache size : 20480 KB

    From /proc/meminfo
       MemTotal:       1058282856 kB
       HugePages_Total:        0
       Hugepagesize:        2048 kB

    /usr/bin/lsb_release -d
       SUSE Linux Enterprise Server 12 SP1

    From /etc/*release* /etc/*version*
       SuSE-release:
          SUSE Linux Enterprise Server 12 (x86_64)
          VERSION = 12
          PATCHLEVEL = 1
          # This file is deprecated and will be removed in a future service pack or
          release.
          # Please check /etc/os-release for details about this release.
       os-release:
          NAME="SLES"
          VERSION="12-SP1"
          VERSION_ID="12.1"
          PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
          ID="sles"
          ANSI_COLOR="0;32"
          CPE_NAME="cpe:/o:suse:sles:12:sp1"
       sgi-accelerate-release: SGI Accelerate 1.12, Build
       714r18.sles12sp1-1604041900

    uname -a:
       Linux linux-v9m3 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
       (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

    run-level 5 Jun 15 17:00

    SPEC is set to: /home/spec
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda4      xfs   1.1T  779G  295G  73% /home
    Additional information from dmidecode:

       Warning: Use caution when you interpret this section. The 'dmidecode' program
       reads system data which is "intended to allow hardware to be accurately
```

Continued on next page

Platform Notes (Continued)

```
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS American Megatrends Inc. BLXSV207 04/17/2017
     Memory:
      64x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1333 MHz
      128x NO DIMM NO DIMM

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/spec/libs/32:/home/spec/libs/64:/home/spec/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.20170404.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.20170404.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Mon Oct 9 12:04:15 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2017.