# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8176M, 2.10GHz)

SPECint®2006 = 83.3

SPECint_base2006 = 80.3

**CPU2006 license:** 9019
**Test sponsor:** Cisco Systems
**Tested by:** Cisco Systems

**Test date:** Sep-2017
**Hardware Availability:** Aug-2017
**Software Availability:** Apr-2017

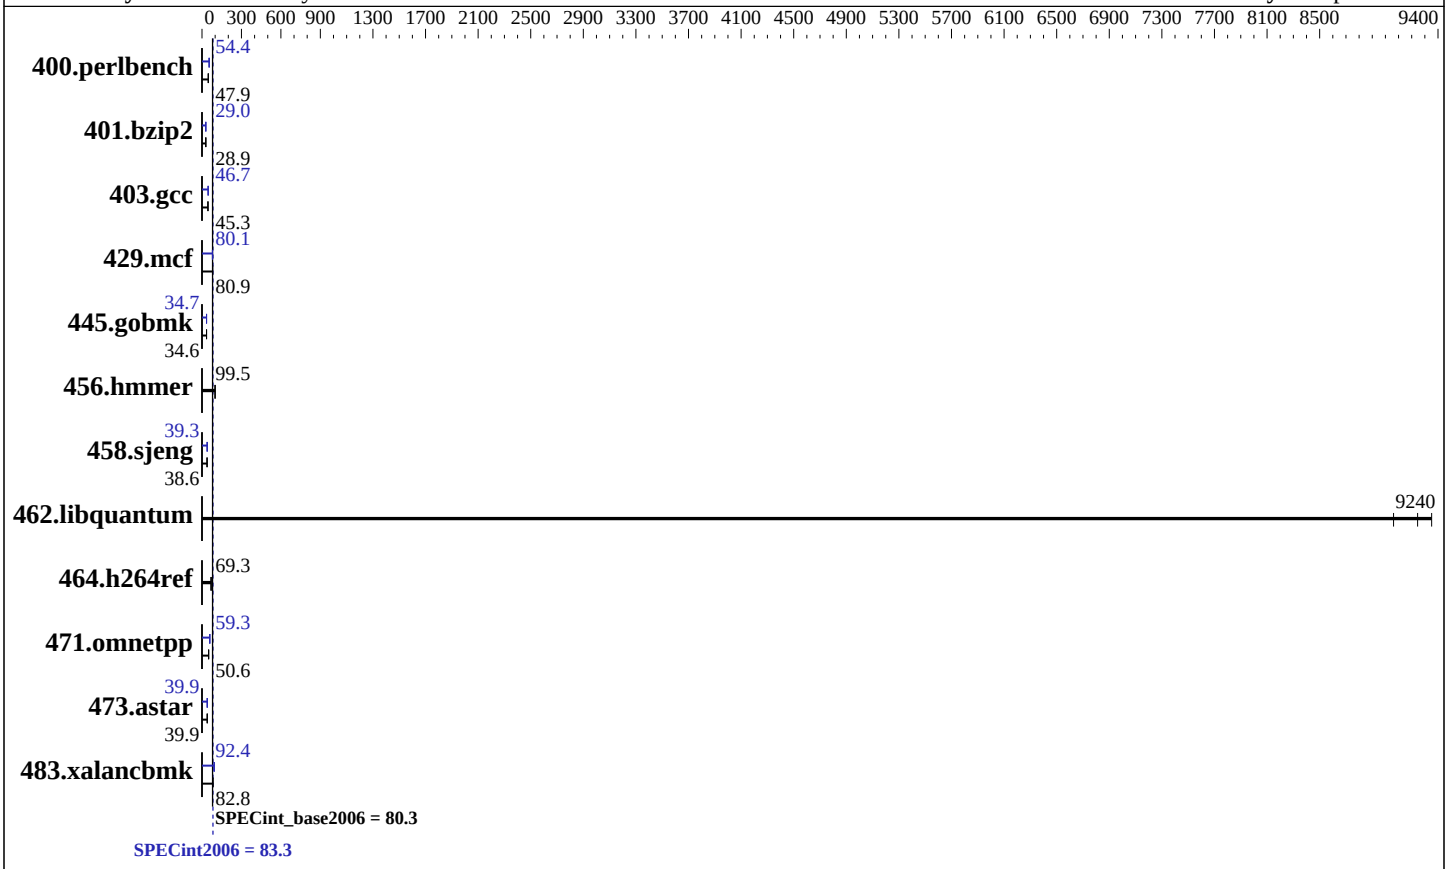


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8176M |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.80 GHz |
| CPU MHz: | 2100 |
| FPU: | Integrated |
| CPU(s) enabled: | 112 cores, 4 chips, 28 cores/chip |
| CPU(s) orderable: | 2,4 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 1 MB I+D on chip per core |
| L3 Cache: | 38.5 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 768 GB (48 x 16 GB 2Rx4 PC4-2666V-R) |
| Disk Subsystem: | 1 x 600 GB SAS HDD, 10K RPM |
| Other Hardware: | None |

### Software

| | |
|---|---|
| Operating System: | Red Hat Enterprise Linux Server release 7.3 (Maipo)<br>3.10.0-514.el7.x86_64 |
| Compiler: | C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux |
| Auto Parallel: | Yes |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.2 |

# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8176M, 2.10GHz)

SPECint2006 = 83.3

SPECint_base2006 = 80.3

**CPU2006 license:** 9019
**Test sponsor:** Cisco Systems
**Tested by:** Cisco Systems

**Test date:** Sep-2017
**Hardware Availability:** Aug-2017
**Software Availability:** Apr-2017

## Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 204 | 47.9 | **204** | **47.9** | 205 | 47.8 | 179 | 54.5 | **179** | **54.4** | 180 | 54.4 |
| 401.bzip2 | **334** | **28.9** | 334 | 28.9 | 333 | 29.0 | **332** | **29.0** | 332 | 29.1 | 332 | 29.0 |
| 403.gcc | **178** | **45.3** | 178 | 45.3 | 178 | 45.3 | **172** | **46.7** | 172 | 46.7 | 172 | 46.8 |
| 429.mcf | 112 | 81.3 | 114 | 79.8 | **113** | **80.9** | 114 | 80.2 | **114** | **80.1** | 116 | 78.9 |
| 445.gobmk | 303 | 34.6 | 303 | 34.6 | **303** | **34.6** | 303 | 34.7 | 303 | 34.6 | **303** | **34.7** |
| 456.hmmer | 93.8 | 99.5 | **93.7** | **99.5** | 93.7 | 99.5 | 93.8 | 99.5 | **93.7** | **99.5** | 93.7 | 99.5 |
| 458.sjeng | 313 | 38.6 | 314 | 38.6 | **313** | **38.6** | **308** | **39.3** | 308 | 39.3 | 308 | 39.3 |
| 462.libquantum | 2.22 | 9350 | **2.24** | **9240** | 2.29 | 9060 | 2.22 | 9350 | **2.24** | **9240** | 2.29 | 9060 |
| 464.h264ref | 319 | 69.3 | 319 | 69.3 | **319** | **69.3** | 319 | 69.3 | 319 | 69.3 | **319** | **69.3** |
| 471.omnetpp | 125 | 49.9 | **123** | **50.6** | 123 | 50.9 | 106 | 59.2 | **105** | **59.3** | 105 | 59.4 |
| 473.astar | **176** | **39.9** | 175 | 40.0 | 177 | 39.7 | 176 | 39.9 | 176 | 39.8 | **176** | **39.9** |
| 483.xalancbmk | 83.4 | 82.8 | 83.3 | 82.9 | **83.3** | **82.8** | **74.6** | **92.4** | 74.6 | 92.4 | 74.7 | 92.3 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The config file option 'submit' was used.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
BIOS Settings:
Intel HyperThreading Technology set to Disabled
CPU performance set to Enterprise
Power Performance Tuning set to OS
SNC set to Disabled
IMC Interleaving set to Auto
Patrol Scrub set to Disabled
 Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on C240.82 Wed Sep 13 22:01:52 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8176M CPU @ 2.10GHz
       4 "physical id"s (chips)
       112 "processors"
```

Continued on next page

## Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 28
         siblings  : 28
         physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
         25 26 27 28 29 30
         physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
         25 26 27 28 29 30
         physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
         25 26 27 28 29 30
         physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
         25 26 27 28 29 30
      cache size : 39424 KB

   From /proc/meminfo
      MemTotal:       790982732 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      os-release:
         NAME="Red Hat Enterprise Linux Server"
         VERSION="7.3 (Maipo)"
         ID="rhel"
         ID_LIKE="fedora"
         VERSION_ID="7.3"
         PRETTY_NAME=Storage
         ANSI_COLOR="0;31"
         CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
      redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
      system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

   uname -a:
      Linux C240.82 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Sep 13 22:01

   SPEC is set to: /home/cpu2006-1.2
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sdb5      xfs   503G   22G  482G   5% /home
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS Cisco Systems, Inc. C480M5.3.1.0.248.0518171057 05/18/2017Cisco Systems,
     Inc. C480M5.3.1.0.248.0518171057 05/18/2017
```

Continued on next page

## Platform Notes (Continued)

```
      Memory:
       96x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

    (End of data from sysinfo program)
    The correct amount of Memory installed is 768 GB (48 x 16 GB)
    and the dmidecode is reporting invalid number of DIMMs installed
    Installed Memory:
    48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz
```

## General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"
OMP_NUM_THREADS = "112"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

## Base Portability Flags

```
    400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
      401.bzip2: -DSPEC_CPU_LP64
        403.gcc: -DSPEC_CPU_LP64
        429.mcf: -DSPEC_CPU_LP64
      445.gobmk: -DSPEC_CPU_LP64
      456.hmmer: -DSPEC_CPU_LP64
      458.sjeng: -DSPEC_CPU_LP64
    462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
    464.h264ref: -DSPEC_CPU_LP64
    471.omnetpp: -DSPEC_CPU_LP64
      473.astar: -DSPEC_CPU_LP64
    483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch -auto-p32`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

C++ benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

473.astar: `icpc -m64`

## Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

# Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div -auto-ilp32 -qopt-prefetch`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -qopt-malloc-options=3 -auto-ilp32`

429.mcf: `-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch -auto-p32`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2)

456.hmmer: `basepeak = yes`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-ra-region-strategy=block -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

473.astar: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64`

483.xalancbmk: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

# Peak Other Flags

C benchmarks:

Continued on next page

## Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml`


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Oct 13 10:13:14 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 October 2017.