



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8153, 2.00 GHz)

SPECint®\_rate2006 = 2810

SPECint\_rate\_base2006 = 2640

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

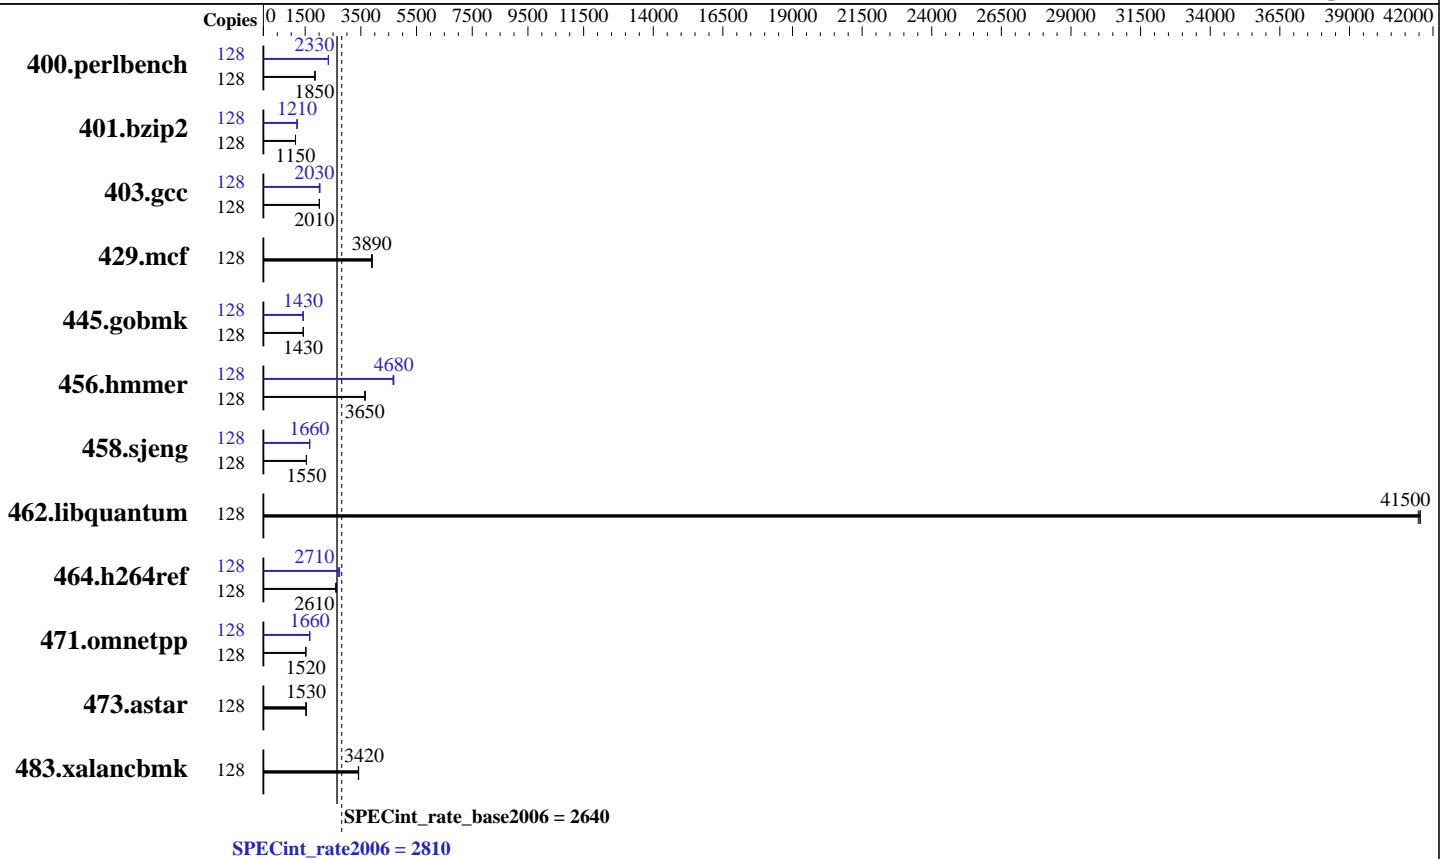

### Hardware

CPU Name: Intel Xeon Platinum 8153  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 22 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 900 GB 15K RPM SAS12  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8153, 2.00 GHz)

SPECint\_rate2006 = 2810

SPECint\_rate\_base2006 = 2640

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Oct-2017  
Hardware Availability: Jul-2017  
Software Availability: Apr-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	<b>675</b>	<b>1850</b>	675	1850	675	1850	128	536	2330	535	2340	<b>536</b>	<b>2330</b>
401.bzip2	128	1071	1150	1070	1150	<b>1071</b>	<b>1150</b>	128	1024	1210	1016	1220	<b>1022</b>	<b>1210</b>
403.gcc	128	513	2010	<b>512</b>	<b>2010</b>	512	2010	128	513	2010	508	2030	<b>509</b>	<b>2030</b>
429.mcf	128	300	3880	<b>300</b>	<b>3890</b>	298	3910	128	300	3880	<b>300</b>	<b>3890</b>	298	3910
445.gobmk	128	937	1430	936	1430	<b>936</b>	<b>1430</b>	128	941	1430	<b>940</b>	<b>1430</b>	939	1430
456.hammer	128	328	3640	<b>327</b>	<b>3650</b>	326	3660	128	<b>255</b>	<b>4680</b>	255	4680	257	4650
458.sjeng	128	<b>1002</b>	<b>1550</b>	1002	1550	1003	1540	128	<b>932</b>	<b>1660</b>	931	1660	933	1660
462.libquantum	128	<b>63.9</b>	<b>41500</b>	64.0	41500	63.8	41500	128	<b>63.9</b>	<b>41500</b>	64.0	41500	63.8	41500
464.h264ref	128	<b>1085</b>	<b>2610</b>	1090	2600	1082	2620	128	<b>1045</b>	<b>2710</b>	1047	2700	1034	2740
471.omnetpp	128	526	1520	<b>526</b>	<b>1520</b>	524	1530	128	<b>481</b>	<b>1660</b>	481	1660	481	1660
473.astar	128	<b>586</b>	<b>1530</b>	585	1540	587	1530	128	<b>586</b>	<b>1530</b>	585	1540	587	1530
483.xalancbmk	128	258	3420	259	3410	<b>258</b>	<b>3420</b>	128	258	3420	259	3410	<b>258</b>	<b>3420</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Kernel boot parameter: nohz\_full=1-127  
Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Logical Processor Enabled  
Virtualization Technology Disabled  
Sub NUMA Cluster Enabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C1E Disabled  
C States set to Autonomous  
Uncore Frequency set to Dynamic  
Memory Patrol Scrub Disabled  
Energy Efficiency Policy set to Performance  
CPU Interconnect Bus Link Power Management Disabled  
PCI ASPM L1 Link Power Management Disabled  
Sysinfo program /home/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-4qdv Tue Oct 17 21:24:08 2017

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 2810

PowerEdge R940  
(Intel Xeon Platinum 8153, 2.00 GHz)

SPECint\_rate\_base2006 = 2640

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Oct-2017  
Hardware Availability: Jul-2017  
Software Availability: Apr-2017

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
 4 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 16
  siblings  : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB
```

```
From /proc/meminfo
MemTotal:      791224272 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-4qdv 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 17 21:23
```

```
SPEC is set to: /home/cpu2006
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8153, 2.00 GHz)

**SPECint\_rate2006 = 2810**

**SPECint\_rate\_base2006 = 2640**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Oct-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Apr-2017

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	796G	17G	779G	3%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.7 08/10/2017

Memory:

3x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz  
21x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz  
24x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -D\_FILE\_OFFSET\_BITS=64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Platinum 8153, 2.00 GHz)

SPECint\_rate2006 = 2810

SPECint\_rate\_base2006 = 2640

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Oct-2017  
Hardware Availability: Jul-2017  
Software Availability: Apr-2017

## Base Portability Flags (Continued)

458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8153, 2.00 GHz)

**SPECint\_rate2006 = 2810**

**SPECint\_rate\_base2006 = 2640**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Oct-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Apr-2017

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3  
  
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3  
  
403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3  
  
429.mcf: basepeak = yes  
  
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-mem-layout-trans=3  
  
456.hmmer: -xCORE-AVX512 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-qopt-mem-layout-trans=3  
  
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto-ilp32  
-qopt-mem-layout-trans=3  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Platinum 8153, 2.00 GHz)

**SPECint\_rate2006 = 2810**

**SPECint\_rate\_base2006 = 2640**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
             -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2)
             -qopt-ra-region-strategy=block
             -qopt-mem-layout-trans=3 -Wl,-z,muldefs
             -L/sh10.2 -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 15 10:58:49 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 November 2017.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 7