



SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint®2006 = 84.2

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECint_base2006 = 81.7

CPU2006 license: 9016


Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

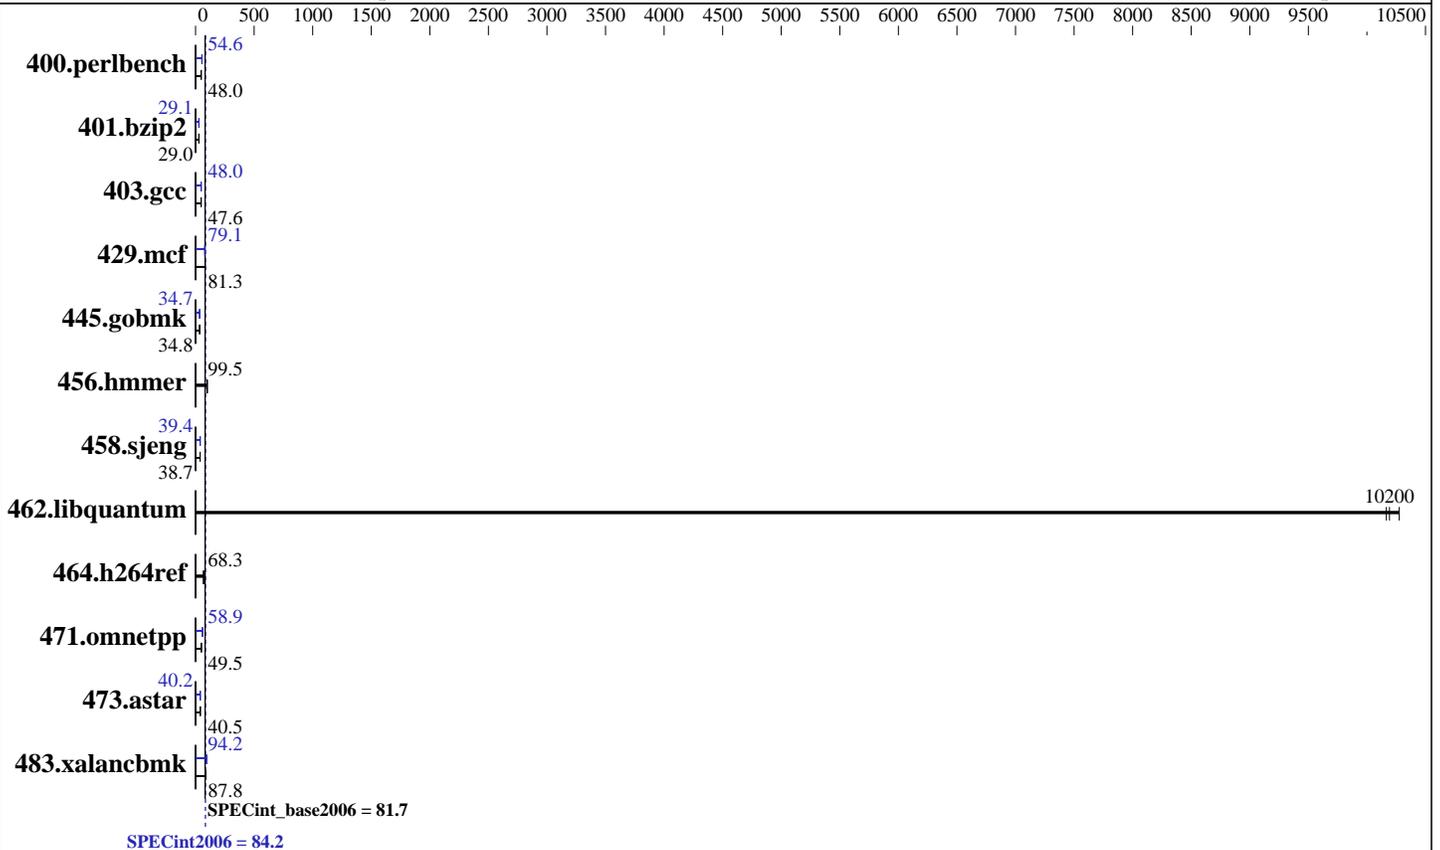

Hardware

CPU Name: Intel Xeon Platinum 8176
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip
 CPU(s) orderable: 1, 2 chip(s)
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
 Disk Subsystem: 1 x 240 GB SATA SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release (x86_64) 7.3 (Maipo)
 Kernel 3.10.0-514.el7.x86_64
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = **84.2**

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECint_base2006 = **81.7**

CPU2006 license: 9016

Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	203	48.2	204	47.9	<u>204</u>	<u>48.0</u>	179	54.5	179	54.6	<u>179</u>	<u>54.6</u>
401.bzip2	333	29.0	334	28.9	<u>333</u>	<u>29.0</u>	332	29.1	<u>332</u>	<u>29.1</u>	332	29.1
403.gcc	169	47.7	<u>169</u>	<u>47.6</u>	169	47.6	168	48.0	168	48.0	<u>168</u>	<u>48.0</u>
429.mcf	111	82.2	113	80.6	<u>112</u>	<u>81.3</u>	<u>115</u>	<u>79.1</u>	115	79.6	116	78.6
445.gobmk	<u>302</u>	<u>34.8</u>	302	34.8	302	34.8	<u>302</u>	<u>34.7</u>	302	34.7	302	34.7
456.hmmr	93.7	99.6	93.8	99.5	<u>93.8</u>	<u>99.5</u>	93.7	99.6	93.8	99.5	<u>93.8</u>	<u>99.5</u>
458.sjeng	313	38.7	<u>313</u>	<u>38.7</u>	313	38.7	307	39.4	307	39.4	<u>307</u>	<u>39.4</u>
462.libquantum	<u>2.03</u>	<u>10200</u>	2.02	10300	2.04	10200	<u>2.03</u>	<u>10200</u>	2.02	10300	2.04	10200
464.h264ref	321	69.0	<u>324</u>	<u>68.3</u>	324	68.2	321	69.0	<u>324</u>	<u>68.3</u>	324	68.2
471.omnetpp	128	49.0	125	50.1	<u>126</u>	<u>49.5</u>	107	58.6	104	59.8	<u>106</u>	<u>58.9</u>
473.astar	174	40.3	<u>174</u>	<u>40.5</u>	173	40.5	<u>175</u>	<u>40.2</u>	174	40.2	175	40.1
483.xalancbmk	78.7	87.7	<u>78.5</u>	<u>87.8</u>	78.5	87.9	<u>74.7</u>	<u>92.4</u>	<u>72.7</u>	<u>94.9</u>	<u>73.2</u>	<u>94.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

SNC = Disabled

IMC interleaving = AUTO

Patrol Scrub = Disabled

VT-d = Disabled

HyperThreading = Disabled

Sysinfo program /spec2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on localhost.localdomain Thu Dec 7 14:04:35 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz

2 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 84.2

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECint_base2006 = 81.7

CPU2006 license: 9016

Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 28
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
cache size : 39424 KB

```

From /proc/meminfo

```

MemTotal:      394626172 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

uname -a:

```

Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Dec 7 09:16

SPEC is set to: /spec2006

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   220G  16G  204G   8% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0601 10/17/2017American Megatrends Inc. 0601 10/17/2017

Memory:

48x Micron 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

The inconsistent memory information found under Platform Notes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 84.2

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECint_base2006 = 81.7

CPU2006 license: 9016

Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Platform Notes (Continued)

is due to a dmidecode issue. The benchmark tool provided by Spec.org was processed on a server with 24 x 16GB RAM.

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,0,3"

LD_LIBRARY_PATH = "/spec2006/lib/ia32:/spec2006/lib/intel64:/spec2006/sh10.2"

OMP_NUM_THREADS = "56"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 84.2

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECint_base2006 = 81.7

CPU2006 license: 9016

Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

```

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

C++ benchmarks (except as noted below):

```

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

```

473.astar: icpc -m64

```



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 84.2

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECint_base2006 = 81.7

CPU2006 license: 9016

Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Peak Portability Flags

```

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -auto-ilp32 -qopt-prefetch

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
          -qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2)

456.hmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

```

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 84.2

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECint_base2006 = 81.7

CPU2006 license: 9016

Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform-Settings-z11-V1.3-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform-Settings-z11-V1.3-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 27 10:49:35 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 February 2018.