CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Advanced Micro Devices

MSI K7D Master Motherboard, AMD Athlon (TM) MP 2200+

SPECint2000 = 726

SPECint_base2000 = 699

SPEC license #: 49 | Tested by: AMD Austin TX | Test date: Aug-2002 | Hardware Avail: Aug-2002 | Software Avail: Feb-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	158	888	157	894
175.vpr	1400	329	425	306	458
176.gcc	1100	237	464	202	544
181.mcf	1800	610	295	609	295
186.crafty	1000	95.0	1053	94.8	1054
197.parser	1800	289	622	288	624
252.eon	1300	89.5	1452	81.1	1603
253.perlbmk	1800	167	1078	167	1077
254.gap	1100	139	793	139	794
255.vortex	1900	173	1096	169	1126
256.bzip2	1500	262	572	249	602
300.twolf	3000	577	520	567	529

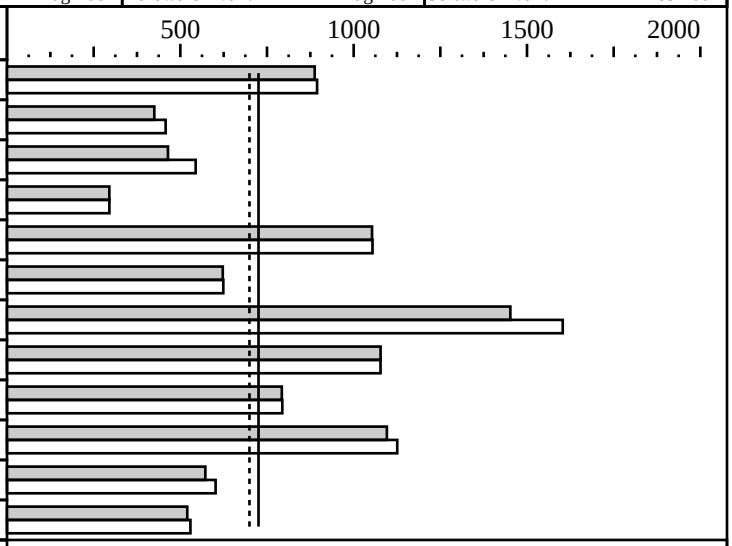

Hardware

CPU:	AMD Athlon (TM) MP 2200+
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1, 2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x256MB PC2100 DDR SDRAM CL2
Disk Subsystem:	Seagate ST318452LW
Other Hardware:	None

Software

Operating System:	Windows 2000 SP2
Compiler:	Intel C++ 5.0.1 build 020125Z Microsoft Visual Studio 6.0 SP5 (libraries) MicroQuill Smartheap Library 5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
176.gcc:    -Dalloca=_alloca /F10000000
186.crafty:   -DNT_i386
253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap:    -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -QxK -Qipo +FDO shlW32M.lib
Baseline C++: -QxK -Qipo -GX -GR
Peak tuning:
164.gzip:     -O3 -QxK -Qwp_ipo -Oi- -Oa +FDO
175.vpr:      -O3 -Qxi -QaxK -Qwp_ipo +FDO
176.gcc:      -O3 -QxK -Qwp_ipo -Oi- +FDO shlW32M.lib
181.mcf:      -O3 -QxK -Qwp_ipo +FDO shlW32M.lib
186.crafty:   -O3 -QxK -Qwp_ipo -Oa +FDO shlW32M.lib
197.parser:   -O3 -QxK -Qwp_ipo +FDO
252.eon:      -O3 -QxK -Qwp_ipo +FDO
253.perlbmk:  -O3 -QxK -Qipo +FDO shlW32M.lib
254.gap:      -O3 -QxK -Qipo -Oi- +FDO
255.vortex:   -O3 -QxK -Qwp_ipo +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 256.bzip2:    -O3 -QxK -Oa -Qwp_ipo
 300.twolf:    -O3 -QxK -Qipo -Oa +FDO shlW32M.lib
 ONESTEP is used for all base and peak runs
The tested system can be assembled using an ATX case such as the Antec KS-282,
a 420W power supply such as the NSpire NSP-420P4B, and a PCI or AGP video card.
The System bus runs at 266MHz
```